
CONSTRUCTION DRG No.


P165/165

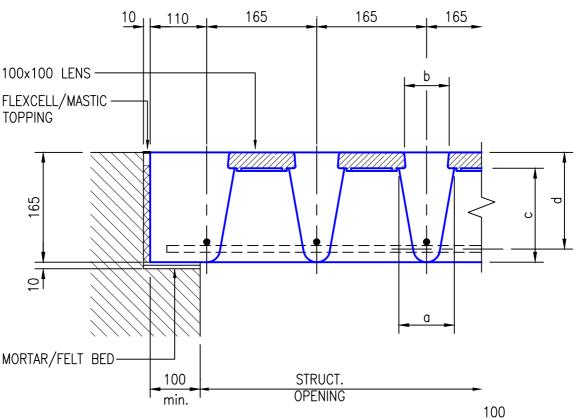

TYPICAL EDGE/CROSS SECTION

SUPERIMPOSED LOADING

 $5KN/M^2 - 4.440M$ Max. CLEAR SPAN $10KN/M^2 - 3.480M$ Max. CLEAR SPAN $20KN/M^2 - 2.560M$ Max. CLEAR SPAN



LENS PATTERN (SCALE=1:5.)

CONCENTRATED LOADING

75KN ULTIMATE - 2.400M Max. CLEAR SPAN SELF WEIGHT = 283kqs/ M^2

FOR DIMENSIONS 'a', 'b', 'c' and 'd' PLEASE REFER TO THE RELEVANT DESIGN CRITERIA DETAIL
SHEET Nos. PL—SPAN1 to 9 inc.

luxcrete

Unit 2 Firbank Industrial Estate
Dallow Road Luton
Bedfordshire
LU1 1TW E:en

tate T:01582 488767 F:01582 724607 www.luxcrete.co.uk E:enquiries@luxcrete.co.uk LUXCRETE OPERATE A POLICY OF CONTINUAL IMPROVEMENT OF THEIR PRODUCTS. SPECIFICATIONS AND DETAILS ARE THEREFORE SUBJECT TO CHANGE WITHOUT NOTICE. ALL TECHNICAL INFORMATION CONTAINED WITHIN THIS DETAIL SHEET IS FOR GUIDANCE ONLY AND MAY BE INAPPROPRIATE UNDER PARTICULAR CONDITIONS.

2011 COPYRIGHT LUXCRETE LTD