





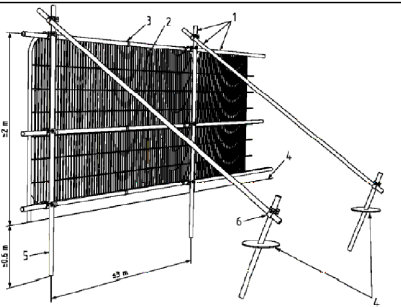


Title	Tree Protection Plan	Root Protection Area		Construction Exclusion Zone	CEZ
Drawing no.	RMT519 - TPP	Canopy Spreads			
Scale	1:250 @ A1	Tree Protection Fencing			
Date	November 2020	Sensitive Demolition			



Default specification for protective barrier




Key


- Standard scaffold poles
- Heavy gauge 2m tall galvanized tube and welded mesh infill panels
- Panels secured to uprights and cross-members with wire ties
- Ground level
- Uprights driven into the ground until secure (minimum depth 0.6m)
- Standard scaffold clamps

Image taken from British Standard BS27:2012 – Trees in relation to design, demolition and construction - Recommendations

Examples of above-ground stabilizing systems

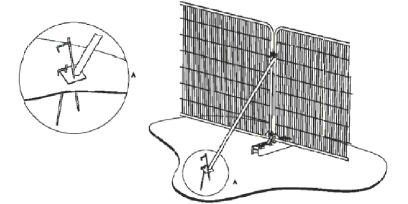

a) Stabilizer strut with base plate secured with ground pins

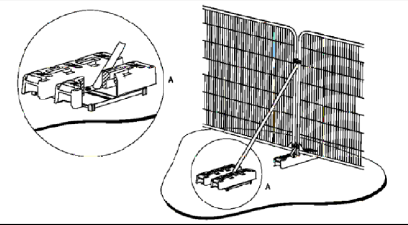

b) Stabilizer strut mounted on block tray

Image taken from British Standard BS27:2012 – Trees in relation to design, demolition and construction - Recommendations

Example of tree protection warning sign



Root Protection Area and Construction Exclusion Zones

- All tree protection measures will be erected as agreed within the BS5837:2012 Arboriculture Survey, Implications Assessment and Arboricultural Method Statement;
- There will be access to foot or vehicular traffic within fenced off areas once development (including demolition) has commenced;
- Once development (including demolition) has commenced the tree protection must not be moved for any reason without the written consent of the local planning authority;
- There will be no excavations, storage of materials, mixing of materials or dumping of spoil within construction exclusion zones (CEZ) unless agreed in writing with the local planning authority;
- All caustic substances e.g. oil, diesel, cement etc will not be stored within 2m of CEZs;
- No fires will be lit within 10m of CEZs or tree canopies;
- Protection area signage will be displayed on protective barriers for the duration of development;

PLEASE BE AWARE – The tree protection specified on this tree protection plan and within the Arboriculture Survey, Implications Assessment and Arboricultural Method Statement document are conditioned to be erected. Failure to protect trees in full accordance with the approved scheme is likely to result in local planning authority taking enforcement action, including prosecution.

