


APPLICATION SITE AREA = 0.36Ha

ALL NEW ACCESS ROADS AND PARKING AREAS ARE TO BE FINISHED AS PER CONSTRUCTION DETAIL (HARDCORE FINISH), AREAS BELOW CARAVANS ARE TO BE SIMILAR BASE WITH GRANITE CHIP FINISH TO TOP TO ALLOW FOR NATURAL DRAINAGE TO OCCUR IN THESE AREAS.

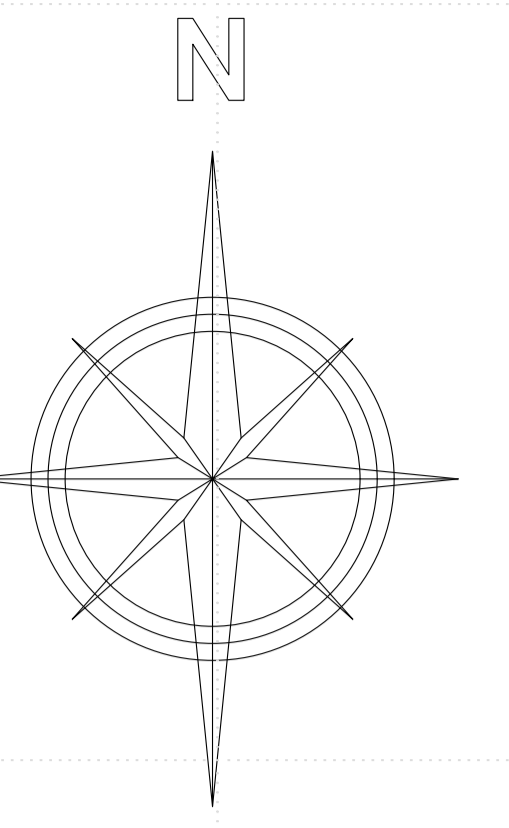


Headiton

NEW DRAINS ARE TO CONNECT TO THE EXISTING FOUL WATER DRAINS PASSING THRU SITE. NEW MANHOLE / INSPECTION CHAMBER REQUIRED AT CONNECTION. POSITION OF EXISTING SEPTIC TANK AND SUB SURFACE SOAKAWAY SYSTEM CONTAINED WITHIN APPLICATION SITE.

EXISTING ACCESS ROAD

NEW 4 METRE WIDE ACCESS ROAD

ALL NEW AND EXISTING LEVELS ARE TO BE THE SAME.

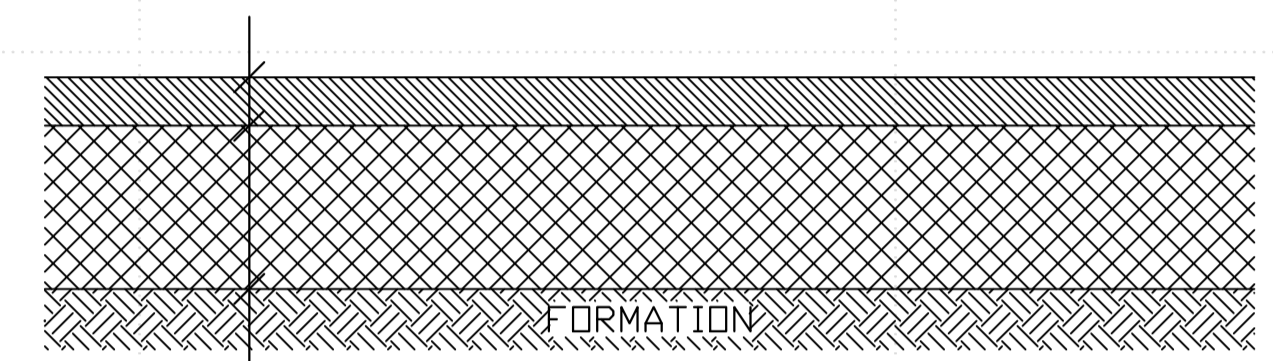

ROAD BASE
80mm DBM (CLAUSE 903).
SUB BASE
300mm MINIMUM SUB-BASE (CLAUSE 803).
(300mm THICKNESS FOR CBR VALUE OF 6.5% IF CBR VALUE IS LESS THAN 6.5% INFDRM ENGINEER)

SPECIFICATION NEW ROADS AND PARKING AREAS

FUTURE PARK EXTENSION
NOT PART OF CURRENT APPLICATION

PROPOSED EXTENSION - (20)

105.0m

109.7m

Track

SITE PLAN 1:500.

© Copyright of JGI DEVELOPMENTS LTD.

Project Title: PROPOSED EXTENSION TO HOLIDAY PARK AT HEADITON HOLIDAY PARK, LONGMANHILL, SIMP, ASH SW.	JAN 21	A	PLANNING AMENDMENTS.
Client: MR P O'DONOGHUE	DATE	Rev.	AMENDMENTS
Date: DECEMBER 2020			
Scale: AS STATED @ A0.			
Project Reference: D1008 - PL - 04A			

JGI DEVELOPMENTS LTD
Dunegan, Victoria Terrace, Turiff, AB53 4BZ
Tel/Fax: 0753693200
email: jgicons@outlook.com