


A1


ALL NEW AND EXISTING LEVELS ARE TO BE THE SAME.

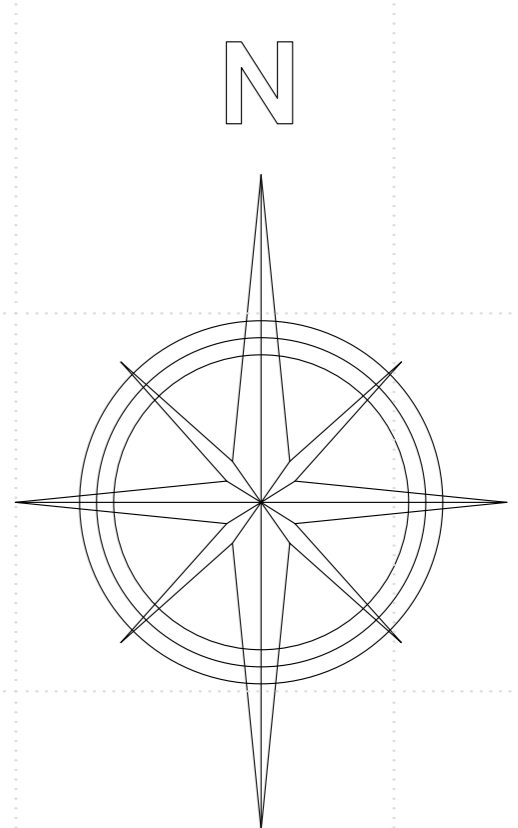

APPLICATION SITE AREA = 0.36Ha

Headiton

NEW DRAINS ARE TO CONNECT TO THE EXISTING FOUL WATER DRAINS PASSING THRU SITE.
NEW MANHOLE / INSPECTION CHAMBER REQUIRED AT CONNECTION.
POSITION OF EXISTING SEPTIC TANK AND SUB SURFACE SOAKAWAY SYSTEM CONTAINED WITHIN APPLICATION SITE.

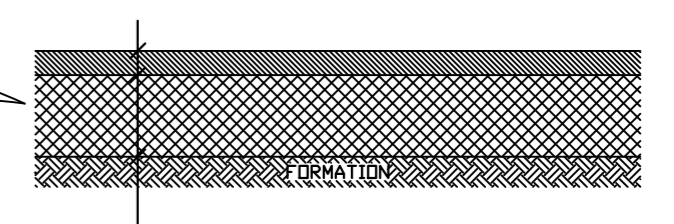

ROAD BASE
80mm DBM (CLAUSE 903)
SUB-BASE
300mm MINIMUM SUB-BASE (CLAUSE 803)
300mm THICKNESS FBR CBR VALUE OF 6.5%
IF CBR VALUE IS LESS THAN 6.5% INFERBY ENGINEER

SPECIFICATION NEW ROADS AND PARKING AREAS

ALL NEW ACCESS ROADS AND PARKING AREAS ARE TO BE FINISHED AS PER CONSTRUCTION DETAIL (HARDCORE FINISH), AREAS BELOW CARAVANS ARE TO BE SIMILAR BASE WITH GRANITE CHIP FINISH TO TOP TO ALLOW FOR NATURAL DRAINAGE TO OCCUR IN THESE AREAS.

FUTURE PARK EXTENSION
NOT PART OF CURRENT APPLICATION

PROPOSED EXTENSION - (20)

105.0m

109.7m

Track

Strathmohr Lodge

Smiddy Croft

©Copyright of JGI DEVELOPMENTS LTD.

Project Title:
PROPOSED EXTENSION TO HOLIDAY PARK AT HEADITON HOLIDAY PARK, LONGMANHILL, BANFF, AB45 3RN.

Client:
MR P O'DONOGHUE

Date:
DECEMBER 2020

Scale:
AS STATED @ A1.

Project Reference:
D1008 - PL - 01B

DATE	No.	AMENDMENTS
JAN 21	B.	PLANNING AMENDMENTS.
JAN 21	A.	PLANNING AMENDMENTS.

JGI DEVELOPMENTS LTD
 Dunvegan, Victoria Terrace, Turiff, AB53 4DZ
 Tel/Fax 07536993305
 email - jgironside@outlook.com

SITE PLAN 1:1000.