



# Product Data Sheet Rockpanel Colours

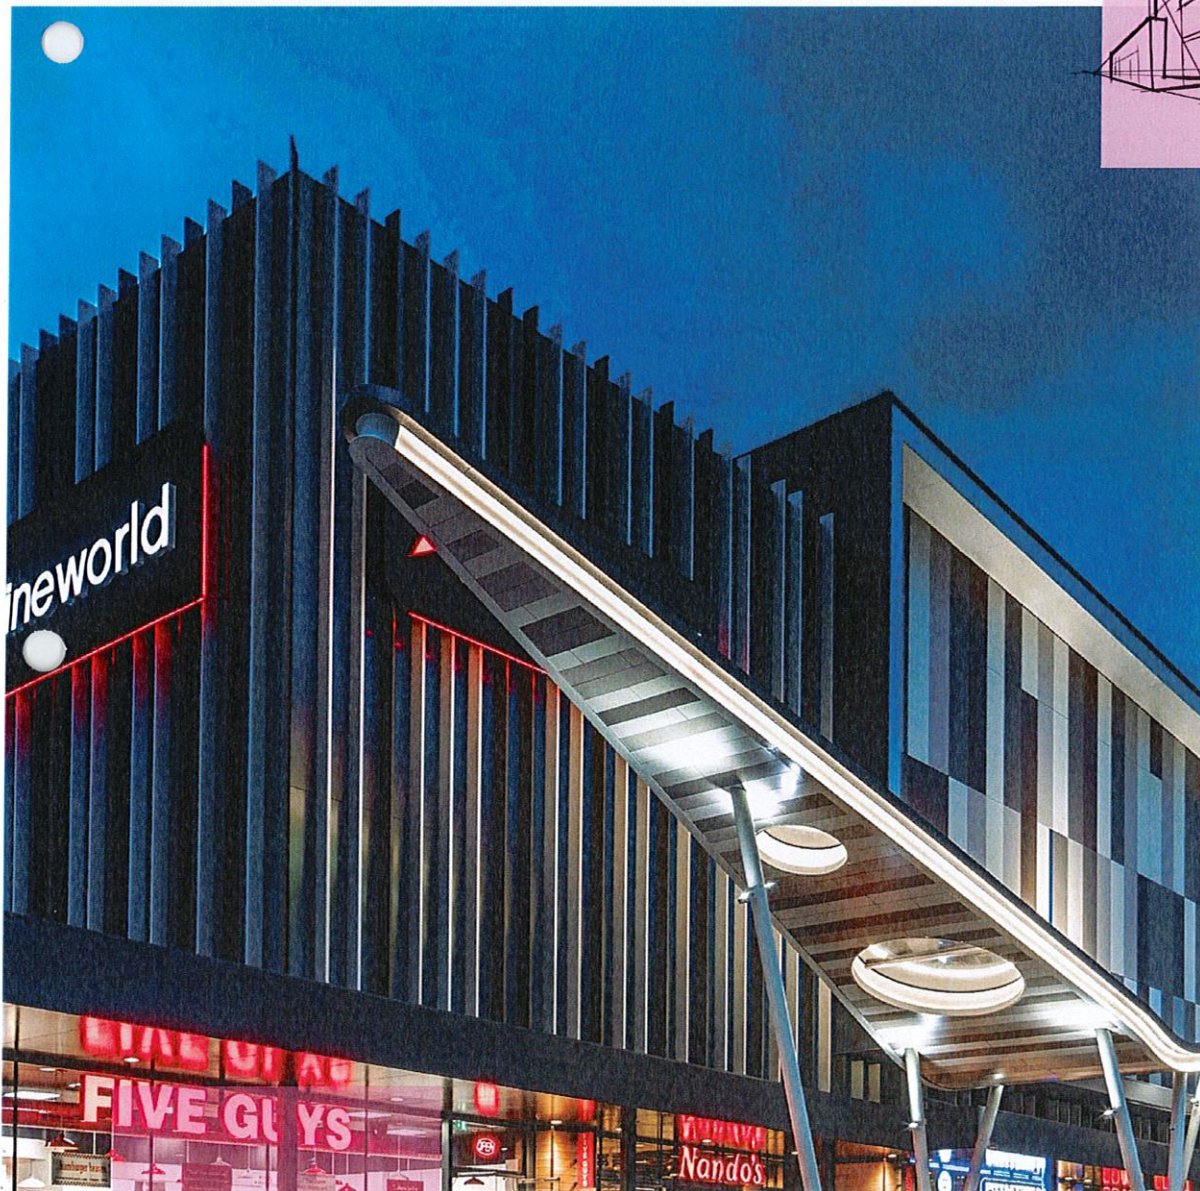

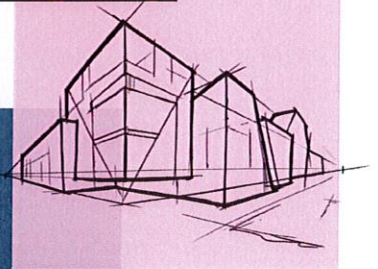

# Rockpanel Colours

Key  
product  
data

## Product description

Let your facade blend into the environment. Or emphasise the features in an urban setting. Enjoy complete freedom in the design of your building – in almost any colour of your choice. In addition to 144 standard and special RAL/NCS colours, you can choose almost any RAL/NCS colour with a minimum order quantity of 100 m<sup>2</sup>.

## Assortment

Product Line	Board Composition	Thickness	Standard dimensions
Rockpanel Colours	Durable	6 mm, 8 mm	1200/1250 x 2500/3050 mm
	FS-Xtra (option)	9 mm	1200/1250 x 2500/3050 mm

## Surface

The surface of Rockpanel Colours is treated with a four-layer water-borne polymer emulsion paint on one side, in a wide range of colours. The Rockpanel ProtectPlus boards are provided with an extra anti-graffiti clear coat as a fifth layer on top of the coloured paint. The ProtectPlus boards are optionally available.

## Fire Safety

The Euroclass-classification of all Rockpanel products is based on testing with non-combustible mineral wool insulation. For the field of application covered by the classification please see the relevant Declaration of Performance. For high-rise buildings and high-risk buildings Rockpanel recommends the application of non-combustible (Euroclass A1-A2) cladding and insulation.

## Key product properties

Rockpanel Colours	Durable	FS-Xtra (option)	Unit	Test/classification method
Optical properties				
Colour stability (5000 h)	ProtectPlus: 4 or better Colours: 3-4 or better	ProtectPlus: 4 or better Colours: 3-4 or better	Class on greyscale	ISO 105 A02
Fire				
Fire classification	B-s2,d0	A2-s1,d0	Euroclass	EN 13501-1
Physical properties				
Weight	6 mm: 6.3 8 mm: 8.4	11.25	kg/m <sup>2</sup>	
Density, nominal	1050	1250	kg/m <sup>3</sup>	EN 323
Thermal conductivity	0.37	0.55	mm/m-K	EN 10456
Water vapour permeability Colours 23°C and 85% RH (S <sub>d</sub> )	< 1.80	N/A	m	EN 12572
Water vapour permeability Colours ProtectPlus 23°C and 85% RH (S <sub>d</sub> )	< 3.5	N/A	m	EN 12572
Coefficient of thermal expansion (α)	10.5	9.7	10 <sup>-3</sup> mm/m-K	EN 438:2 clause 17
Coefficient of moisture expansion (after 4 days)	0.302	0.206	mm/m	EN 438:2 clause 17
Mechanical properties				
Bending strength, length and width (f <sub>gs</sub> )	≥ 27	≥ 25.5	N/mm <sup>2</sup>	EN 310 / EN 1058
Modulus of elasticity m (E)	4015	4740	N/mm <sup>2</sup>	EN 310

## Fixing distances

Maximum Fixing distances (mm)	Durable 6 mm		Durable 8 mm		FS-Xtra 9 mm	
	b max.	a max.	b max.	a max.	b max.	a max.
Nail	400	300	600	400	N/A	N/A
Screw	400	300	600	600	N/A	N/A
Rivet	N/A	N/A	600	600	600	600
Bonding	N/A	N/A	600	uninterrupted glue line	N/A	N/A

Test in this document are executed according to the European Assessment Document (EAD 090001-00-0404) for Rockpanel boards.

# Rockpanel boards

General  
product  
information

The Rockpanel boards are produced from compressed natural basalt, a sustainable and readily available volcanic rock and bonded with an organic binder from which all Rockpanel products derive their unique properties. The products combine the advantages of stone and workability of wood.

## Fire safety

Rockpanel boards offer high performance when assessed for reaction to fire. Due to the nature of the stone wool fibres and the low binder content the boards have a low calorific value, this means that they will hardly contribute to a fire when exposed. As a result, the addition of environmentally unfriendly flame retardants is not needed. The Rockpanel products are tested in accordance with the European harmonized technical specification (EAD 090001-00-0404) and are classified in accordance with EN 13501-1. The reaction to fire classification is based upon the end use situation as described in the EAD with non-combustible mineral wool insulation. The field of application covered by the reaction to fire classification is given in the Declaration of Performance (DoP, see [www.rockpanel.com](http://www.rockpanel.com)).

For high-rise buildings and high-risk buildings Rockpanel recommends only the application of non-combustible (Euroclass A1-A2) cladding and insulation.

## Sustainability and environment

Rockpanel Durable and FS-Xtra products have been independently certified for their environmental performance by the Building Research Establishment (BRE), complying with all requirements identified in the scheme document SD028. BRE granted Rockpanel an Environmental Product Declaration (Environmental Profiles Certificate No. 427) acknowledging Rockpanel Durable and FS-Xtra board material as amongst the best in their category with A+ and A ratings for various structures. Next to these Environmental Profiles ratings and Greenbook live registration, BRE issued for the Durable and FS-Xtra composition an ECO\_EPD in accordance with EN 15804.

The influence on air quality and release of dangerous substances to soil and water has been determined to achieve the European Technical Assessment. The analysis showed Rockpanel boards contain no dangerous materials such as biocides; the manufacture of Rockpanel boards does not involve the use of flame retardants or cadmium. The formaldehyde concentration is  $\leq 0.0105$  mg/m<sup>3</sup> which relates to formaldehyde class E1.

## Packaging

The panels are provided with a protective film on the decorative face (with the exception of Rockpanel Metallics White Aluminium/Grey Aluminium, Natural, Lines<sup>2</sup> and Structures) and are delivered on pallets and with a protective cover and edge protection. The panels must be stored on a dry sub-soil and protected against rain, preferably under a cover. Pallets shall be stacked no more than two pallets high. The panels should be lifted upward when being handled and should not be slid over one another. Protective foam membranes should be placed between the sheets again to protect the surface layer, for example when the panels are stacked after having been sawn.

## Visual appearance

Surface quality: Rockpanel boards are produced with the utmost care and individually checked before being approved. In the event of doubts the panels are judged visually for aesthetic flaws, in daylight, without sight enhancements, from a distance of at least 5 metres in front of the surface of the façade element, with an observation angle of 45° (horizontally/vertically).

Batches: Rockpanel boards are produced using incoming inspection, process assurance and quality control by which Rockpanel Colours boards in RAL/NCS colours out of different batches can be combined. However for all other products and for project related orders, the whole order for a given project must be ordered as a single batch.

## Maintenance

Depending on the surface treatment, the boards can be cleaned with ordinary cleaning agents such as car shampoo dissolved in lukewarm water. Organic solvents for boards with the ProtectPlus finish are in general also allowed (such as white spirit and acetone), however consult Rockpanel for the correct application method. To remove graffiti, Rockpanel can supply a special cleaner.

The Rockpanel Natural boards can be cleaned with a brush. Stubborn pollution can be removed with a wire brush. The cleaned spot will then become visible and weather again. Do not clean Rockpanel Natural with a solvent or detergent.



# Rockpanel Colours

Detailed  
product  
information

Within our detailed product information section you can read about the impact resistance, suitable sub frames, fire properties and the specified fixings. Also visit [www.rockpanel.co.uk](http://www.rockpanel.co.uk) for additional information on Rockpanel board material, such as a complete overview of the Rockpanel assortment, guidelines for processing and installation, specifications text, health and safety and application.

## Impact resistance

Categories	Durable 8 mm	Durable 6 mm	FS-Xtra	Test / classification method
Hard body (1 J)	IV	-	IV	
Hard body (3 J)	III, II, I	I	III, II, I	
Hard body (10 J)	II, I	-	II, I	
Soft body (10 J)	IV, III	III	IV, III	ISO 7892: 1988
Soft body (60 J)	II, I	-	-	
Soft body (300 J)	II	-	-	
Soft body (400 J)	-	-	-	

Application for full boards, for a complete overview and description, please consult the relevant European Technical Assessment.

## Suitable sub frames

Rockpanel Colours in Durable quality can be attached to the building by fixing to a sub frame of wood or metal. Rockpanel Colours in FS-Xtra quality can only be attached to a sub-frame of aluminium or steel. The vertical wooden battens should have a minimum thickness of 28 mm. The minimum thickness of the vertical aluminium profiles is 1.5 mm.

The aluminium is AW-6060 according to EN 755-2. The Rm/Rp0.2 value is 170 /140 for profile T6 and 195/150 for profile T66. The minimum thickness of the vertical steel profiles is either 1.0 mm (steel quality is S320GD +Z EN 10346 number 1.0250, or equivalent for cold forming), or 1.5 mm (steel quality EN 10025-2:2004 S235JR number 1.0038).

## Properties in relation to fire

Product Grade	Vertical subframe***	Construction build-up	Fixing method	Classification
Durable 8 mm	Wooden sub frame	Ventilated with EPDM gasket or Rockpanel strips* on the battens	Mechanically fixed	B-s2,d0
	Wooden sub frame	Non-ventilated, cavity filled with mineral wool**	Mechanically fixed	B-s1,d0
	Wooden sub frame	Ventilated with Rockpanel strips* (8 mm) on the battens; for the Colours White/Black or Grey	Mechanically fixed	B-s1,d0
	Wooden sub frame	Ventilated with Rockpanel strips* (8 mm) on the battens	Bonded	B-s2,d0
	Aluminium sub frame	Ventilated	Mechanically fixed	B-s2,d0
	Aluminium sub frame	Ventilated	Bonded	B-s2,d0
Durable 6 mm	Wooden sub frame	Ventilated with EPDM gasket or Rockpanel strips* on the battens	Mechanically fixed	B-s2,d0
	Wooden sub frame	Non-ventilated, cavity filled with mineral wool**	Mechanically fixed	B-s1,d0
FS-Xtra 9 mm	Aluminium or steel subframe	Ventilated with ≥ 20 mm cavity	Mechanically fixed	A2-s1,d0

\* gasket/strip 15 mm wider at both sides than the batten

\*\* Check the pre-conditions for non-ventilated constructions or consult Rockpanel.

\*\*\* For a complete overview and description of the end use situation in which the classification is determined, please consult the relevant European Technical Assessment.

## Fixings specified for use with Rockpanel Durable & FS-Xtra

	Ring shank nail	Torx screw	Rivet <sup>(1)</sup>			
Durable 8 mm	✓	✓	✓	✓	✓	✓
Durable 6 mm	✓	✓	-	-	-	-
FS-Xtra 9 mm	-	-	✓	✓	✓	✓
Code			AP14-50180-S	1290406	SSO-D15-50180	1290806
Sub frame <sup>(2)</sup>	Wooden sub frame	Wooden sub frame	Aluminium sub frame	Aluminium sub frame	Steel sub frame	Steel sub frame
Thickness subconstruction <sup>(2)</sup>	≥ 28 mm	≥ 28 mm	≥ 1,5 mm	≥ 1,8 mm	≥ 1,0 mm	≥ 1,5 mm
Material (body)	Stainless steel material nr. 1.4401 or 1.4578 according EN 10088	Stainless steel material nr. 1.4401 or 1.4578 according EN 10088	EN AW-5019 (AlMg5) according EN 755-2	EN AW-5019 (AlMg5) according EN 755-2	Stainless steel material nr. 1.4578 according EN 10088	Stainless steel material nr. 1.4567 according EN 10088
Length	32 mm und 40 mm	35 mm	18 mm	18 mm	18 mm	16 mm
Shank diameter	2,7-2,9 mm	3,3-4,5 mm	5 mm	5 mm	5 mm	5 mm
Head diameter fixing	6,0 mm	9,6 mm	14 mm	14 mm	15 mm	14 mm
Hole Ø fixed point	2,5 mm	3,2 mm	5,2 mm	5,2 mm	5,2 mm	5,2 mm
Hole Ø moving point	3,8 mm	6,0 mm	8,0 mm	8,0 mm	8,0 mm	8,0 mm
Hole Ø slotted point	2,8 x 4,0 mm	3,4 x 6,0 mm	5,2 x 8,0 mm	5,2 x 8,0 mm	5,2 x 8,0 mm	5,2 x 8,0 mm

<sup>(1)</sup> For correct fixing, use riveting tool with rivet spacer

<sup>(2)</sup> In accordance with paragraph "Suitable sub-frames"

## European Technical Assessment (ETA)

## Declarations of Performance (DoP)

European Technical Assessment ETA-07/0141:	Rockpanel Durable 8 mm finish Colours/Rockclad and Rockpanel Durable 8 mm finish ProtectPlus	0764-CPR-0238
European Technical Assessment ETA-08/0343:	Rockpanel Durable 6 mm finish Colours/Rockclad	0764-CPR-0237
European Technical Assessment ETA-13/0340:	Rockpanel FS-Xtra 9 mm finish Colours/Rockclad and Rockpanel FS-Xtra 9 mm finish ProtectPlus	0764-CPR-0240

## Additional information

The product data sheet Rockpanel Colours clearly specifies the general product properties and is not related to national building regulations. Relevant information about the application of Rockpanel boards related to national building regulations or national guidelines can be found in the Rockpanel instruction guide and on the Rockpanel website. The Rockpanel instruction guide and the website also provide fixing tables related to national annex of the EN 1991-1-4.

Published August 2018. This publication supersedes and replaces all previous datasheets. Subject to alterations. All data are intended to serve as general information about our products and their possible uses. This publication is an extract of the European Technical Assessment, which is the only legally binding document. ROCKWOOL B.V. / Rockpanel disclaims any liability towards possible (typing) errors and incomplete information in this product data sheet. No rights may be derived from the content of this publication.

[www.rockpanel.co.uk](http://www.rockpanel.co.uk)

## **ROCKWOOL Ltd** **Rockpanel**

Wern Tarw

Pencoed Bridgend

CF35 6NY

Tel.: +44 (0) 1656 863210

Fax: +44 (0) 1656 863611

[www.rockpanel.co.uk](http://www.rockpanel.co.uk)



# Rockpanel Colours

The Rockpanel Colours assortment consists of below Rockpanel Standard and Special Colours. Furthermore almost every RAL / NCS colour is available as of 100 m<sup>2</sup> per colour.



## Rockpanel Colours Standard

The following Rockpanel Standard Colours in thickness 6 mm and 8 mm are available direct from stock as of 1 board with a delivery time of maximum 1 week:



The following Rockpanel Standard Colours in thickness 8 mm are available direct from stock as of 1 board with a delivery time of 1 week. In thickness 6 mm they are available as of 50 m<sup>2</sup> per colour with a delivery time of maximum 4 weeks:





## Rockpanel Colours Special

Rockpanel Colours Special are available in thickness 6 mm and 8 mm with a minimum order size of 50 m<sup>2</sup> per colour and delivery time of maximum 4 weeks:

RAL 000 50 00	RAL 060 70 20	RAL 100 40 20	RAL 130 80 20	RAL 210 30 30	RAL 250 50 10	RAL 3028	RAL 5021	RAL 7010	NCS S 2050 - Y
RAL 010 20 20	RAL 070 60 75	RAL 100 90 20	RAL 140 60 10	RAL 210 40 25	RAL 260 20 20	RAL 4004	RAL 5022	RAL 7033	NCS S 2060 - B90G
RAL 020 20 05	RAL 075 40 30	RAL 100 90 50	RAL 150 80 10	RAL 210 90 10	RAL 270 30 15	RAL 4007	RAL 6001	RAL 8001	NCS S 2070 G30 Y
RAL 040 50 70	RAL 080 30 05	RAL 110 70 20	RAL 160 50 20	RAL 220 20 10	RAL 1012	RAL 5000	RAL 6013	RAL 8024	NCS S 3030 - Y10R
RAL 050 30 10	RAL 080 30 10	RAL 110 70 50	RAL 170 40 10	RAL 220 40 10	RAL 1032	RAL 5001	RAL 6015	NCS S 0520 - R10B	NCS S 3040 - B20G
RAL 050 40 40	RAL 080 40 05	RAL 120 80 20	RAL 180 20 05	RAL 220 60 10	RAL 2012	RAL 5003	RAL 6022	NCS S 1040 - B70G	NCS S 4030 - R50B
RAL 060 30 20	RAL 090 80 20	RAL 130 60 30	RAL 190 40 15	RAL 240 30 10	RAL 3007	RAL 5004	RAL 6028	NCS S 2010 - B70G	NCS S 5020 - Y10R
RAL 060 50 30	RAL 095 70 70	RAL 130 80 10	RAL 200 50 05	RAL 240 80 05	RAL 3015	RAL 5008	RAL 7009	NCS S 2050 - B	NCS S 0570 Y90R

## Rockpanel Colours Custom

Almost every RAL / NCS colour in thickness 6 mm and 8 mm is available as of 100 m<sup>2</sup> per colour with a delivery time of maximum 6 weeks.

