



255mm x 125mm HB2 PCC KERB TO BE BEDDED IN 20mm 1:3 CEMENT/SAND MORTAR, CONCRETE BED AND HAUNCH GRADE GEN 1 (ST.1)  
230mm x 10mm Ø DOWL BARS TO BE PROVIDED AT 600mm CENTRES

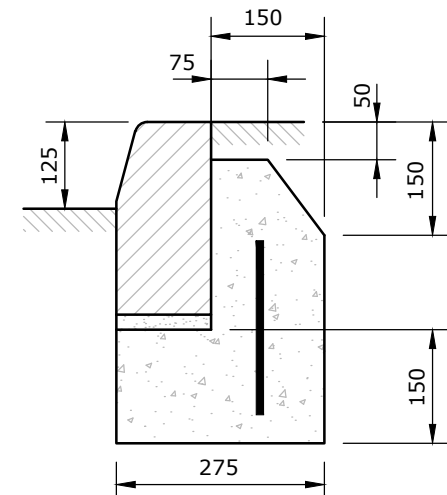


**DETAIL A**  
SCALE 1:10

150mm x 125mm PCC BN KERB TO BE BEDDED IN 20mm 1:3 CEMENT/SAND MORTAR, CONCRETE BED AND HAUNCH GRADE GEN 1 (ST.1)

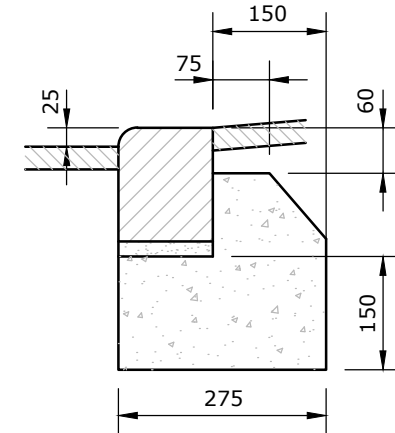


**DETAIL B**  
SCALE 1:10

150mm x 50mm EF PCC EDGING KERB TO BE BEDDED IN 20mm 1:3 CEMENT/SAND MORTAR, CONCRETE BED AND HAUNCH GRADE GEN 1 (ST.1)




**DETAIL C**  
SCALE 1:10

255mm x 125mm BN PCC KERB TO BE BEDDED IN 20mm 1:3 CEMENT/SAND MORTAR, CONCRETE BED AND HAUNCH GRADE GEN 1 (ST.1)  
230mm x 10mm Ø DOWL BARS TO BE PROVIDED AT 600mm CENTRES

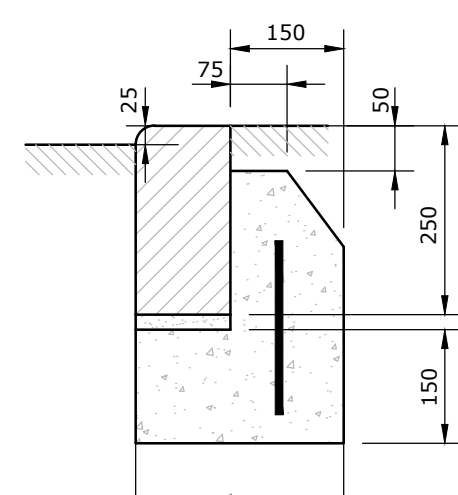


**DETAIL D**  
SCALE 1:10

255mm x 145mm CONSERVATION KERB TO BE BEDDED IN 20mm 1:3 CEMENT/SAND MORTAR, CONCRETE BED AND HAUNCH GRADE GEN 1 (ST.1)  
230mm x 10mm Ø DOWL BARS TO BE PROVIDED AT 600mm CENTRES

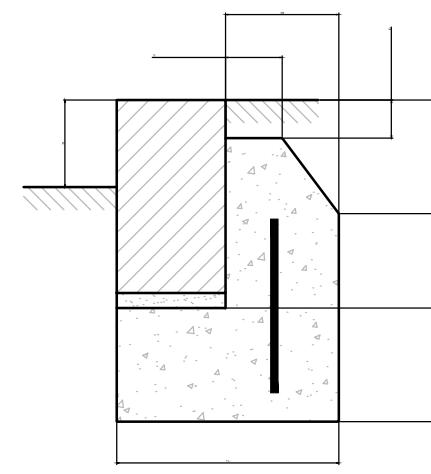


**DETAIL E**  
SCALE 1:10

255mm x 145mm BN CONSERVATION KERB TO BE BEDDED IN 20mm 1:3 CEMENT/SAND MORTAR, CONCRETE BED AND HAUNCH GRADE GEN 1 (ST.1)  
230mm x 10mm Ø DOWL BARS TO BE PROVIDED AT 600mm CENTRES

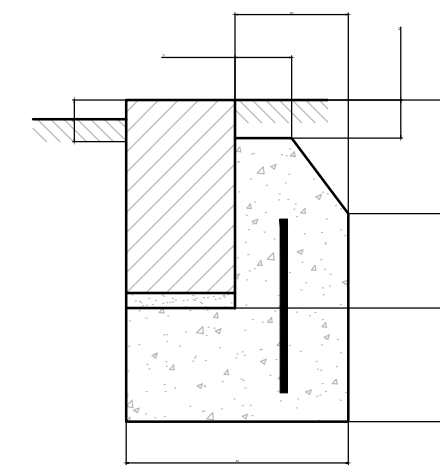

**DETAIL F**  
SCALE 1:10

150mm x 63mm CONSERVATION EDGING KERB TO BE BEDDED IN 20mm 1:3 CEMENT/SAND MORTAR, CONCRETE BED AND HAUNCH GRADE GEN 1 (ST.1)



**DETAIL G**  
SCALE 1:10

**Notes:**

- All dimensions in millimeters unless noted otherwise.
- This drawing to be read in conjunction with all other engineering drawings and calculations associated with this project.
- All adoptable highway works are to be carried out to the requirements and full satisfaction of the Kent County Council.
- All adoptable drainage works are to be carried out to the requirements and full satisfaction of Southern Water Services Ltd.
- All sewers are to be constructed in accordance with water authorities association publication 'Sewers for Adoption 7th Edition'.
- All components and materials are to be manufactured and supplied in accordance with the relevant British Standards, and laid and backfilled in accordance with manufacturers instructions and the relevant British Standards.
- All gullies to be trapped.
- Road markings to be in accordance with standard dimensions and layout as recommended in the traffic signs regulations and general directions 2002.
- All building drainage to be installed and tested in compliance with the Building Regulations 2000 drainage and Waste Disposal Approved document H 2002 edition.
- All above ground drainage to incorporate rodding access facilities.
- For internal drainage positions refer to Architect's current working drawings.
- For landscaping surface material finishes refer to Architect's current working drawings.
- All rain water pipe connections are to match downpipe diameters.
- For finished external works levels refer to Architect's working drawings.
- External works drainage details in abeyance subject to receipt of Architect's working drawings showing finished levels and surface finishes.
- All foundations to be constructed with base of foundation to be a minimum of 150mm below lowest part of adopted sewer.

2	Scale Updated	AW	AC	30/04/21
1	Stage 3 Issue	AC	STB	21/12/20
Rev	Description	Iss	Chk	Date

**Client**  
Tunbridge Wells Borough Council

**Project**  
Benhall Mill

**Drawing**  
Proposed Civils Details  
Sheet 2 of 2

Scale @ A1  
1:10

**STATUS**  
**PRELIMINARY**

**crofton**  
THE HOPPERS  
GOBLANDS FARM BUSINESS CENTRE  
CEMETERY LANE  
HADLOW  
KENT TN11 0LT  
T 01732 850440  
E kent@crofton-design.com  
W www.crofton-design.com  
**Consulting Engineers**  
London | Kent | East Sussex

Job No.	Drng. No.	Rev
20012	C-1002	P2
20012-CFN-00-00-DR-C-1002-S2-P2		

