


- Notes:**
- Existing sewer locations taken from a combination of survey data and asset plans. Contractor to confirm position and level of all services prior to commencement.
 - Section 50b license required to excavate and install the rising main and associated chambers.
 - Foul drainage connection to existing sewer subject to Section 106 application with Southern Water.
 - Reinstatement of excavated public highway to Hants details.
 - Junction works subject to S278 agreement by others.
 - Drawing to be read in conjunction with 520 drainage details and 550 headwall details.
 - Drainage to be constructed in accordance with Sewers for Adoption 7th Edition.
 - Manholes to be:
 - Type 4 < 1.2m deep
 - Type 3 > 1.2m
 - Manhole Diameters
 - 450mm < 225mm pipe work
 - 600mm > 225mm pipe work
 - Type 2 > 1.8m deep
 - Type 1 > 3m
 - Manhole Diameters
 - 1200mm < 375mm pipe work
 - 1350mm < 450mm
 - Drainage has been sized to accommodate the northern development, however the Hydro-Brake is sized for the southern development only and will need to be replaced to service the northern residential development if required in the future.

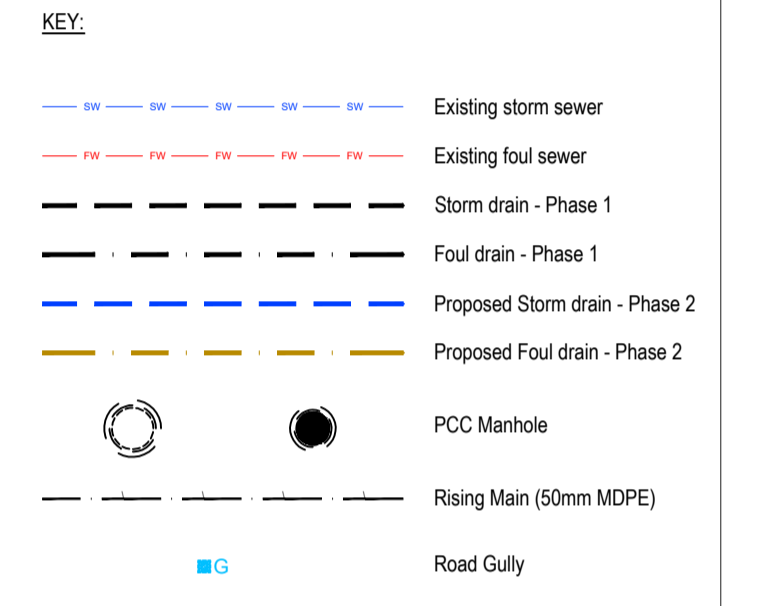

P1	11.01.21	Planning Issue	DG	DG
Rev	Date	Description	By Apvd	

PROJECT:
BUCKMORE FARM, PETERSFIELD

TITLE:
DRAINAGE
PHASE 2

CLIENT:
GENTIAN (PETERSFIELD) LTD.

SCALE@A1:
1:250

PROJECT REF:
16156
DRAWING No: 501
REV: P1

Revision Referencing
P = Preliminary A = Approval T = Tender C = Construction

