



Product Information Table											
Product	Volume (L)	Empty Weight (kg)	Dimensions (mm)								
			'A'	'B'	'C'	'D'	'E'	'F'	'G' SEE NOTE 7	'H'	'J'
STH028	2800	165	3020	600	Ø460	Ø1225	500	530	Ø110	1630	1130
STH038	3800	185	3900	600	Ø460	Ø1225	500	530	Ø110	1620	1120
STH057	5700	205	4275	750	Ø600	Ø1425	500	530	Ø110	1830	1330
STH071	7150	280	3230	675	Ø600	Ø1920	500	550	Ø160	2290	1790
STH091	9150	325	3965	675	Ø600	Ø1920	500	550	Ø160	2290	1790

Notes:

1. Tanks have an inlet invert depth of 0.5m as standard. Upon request this may be extended up to 1.5m via neck GRP riser pieces.
2. This drawing should be used for dimensional information only. Refer to installation guidelines for full tank installation.
3. Additional ventilation can be achieved on the incoming drain, via a stack pipe. Position to suit specific site conditions.
4. Confirm with local building regulations if additional venting is required.
5. If backfilling with peashingle the tank must be strapped down using suitable anchoring points and strapping (by others).
6. Product is tested and approved to EN 12566-1 (99.7% Efficiency)
7. STH028, 038 & 057 Available with Ø160mm pipework, this is not as tested, as base to inlet invert, base to outlet invert and overall height will reduce by 40mm.

Strapping + Anchor Points for Pea Gravel Backfill (Others)

Manhole Covers Can Be Supplied Separately

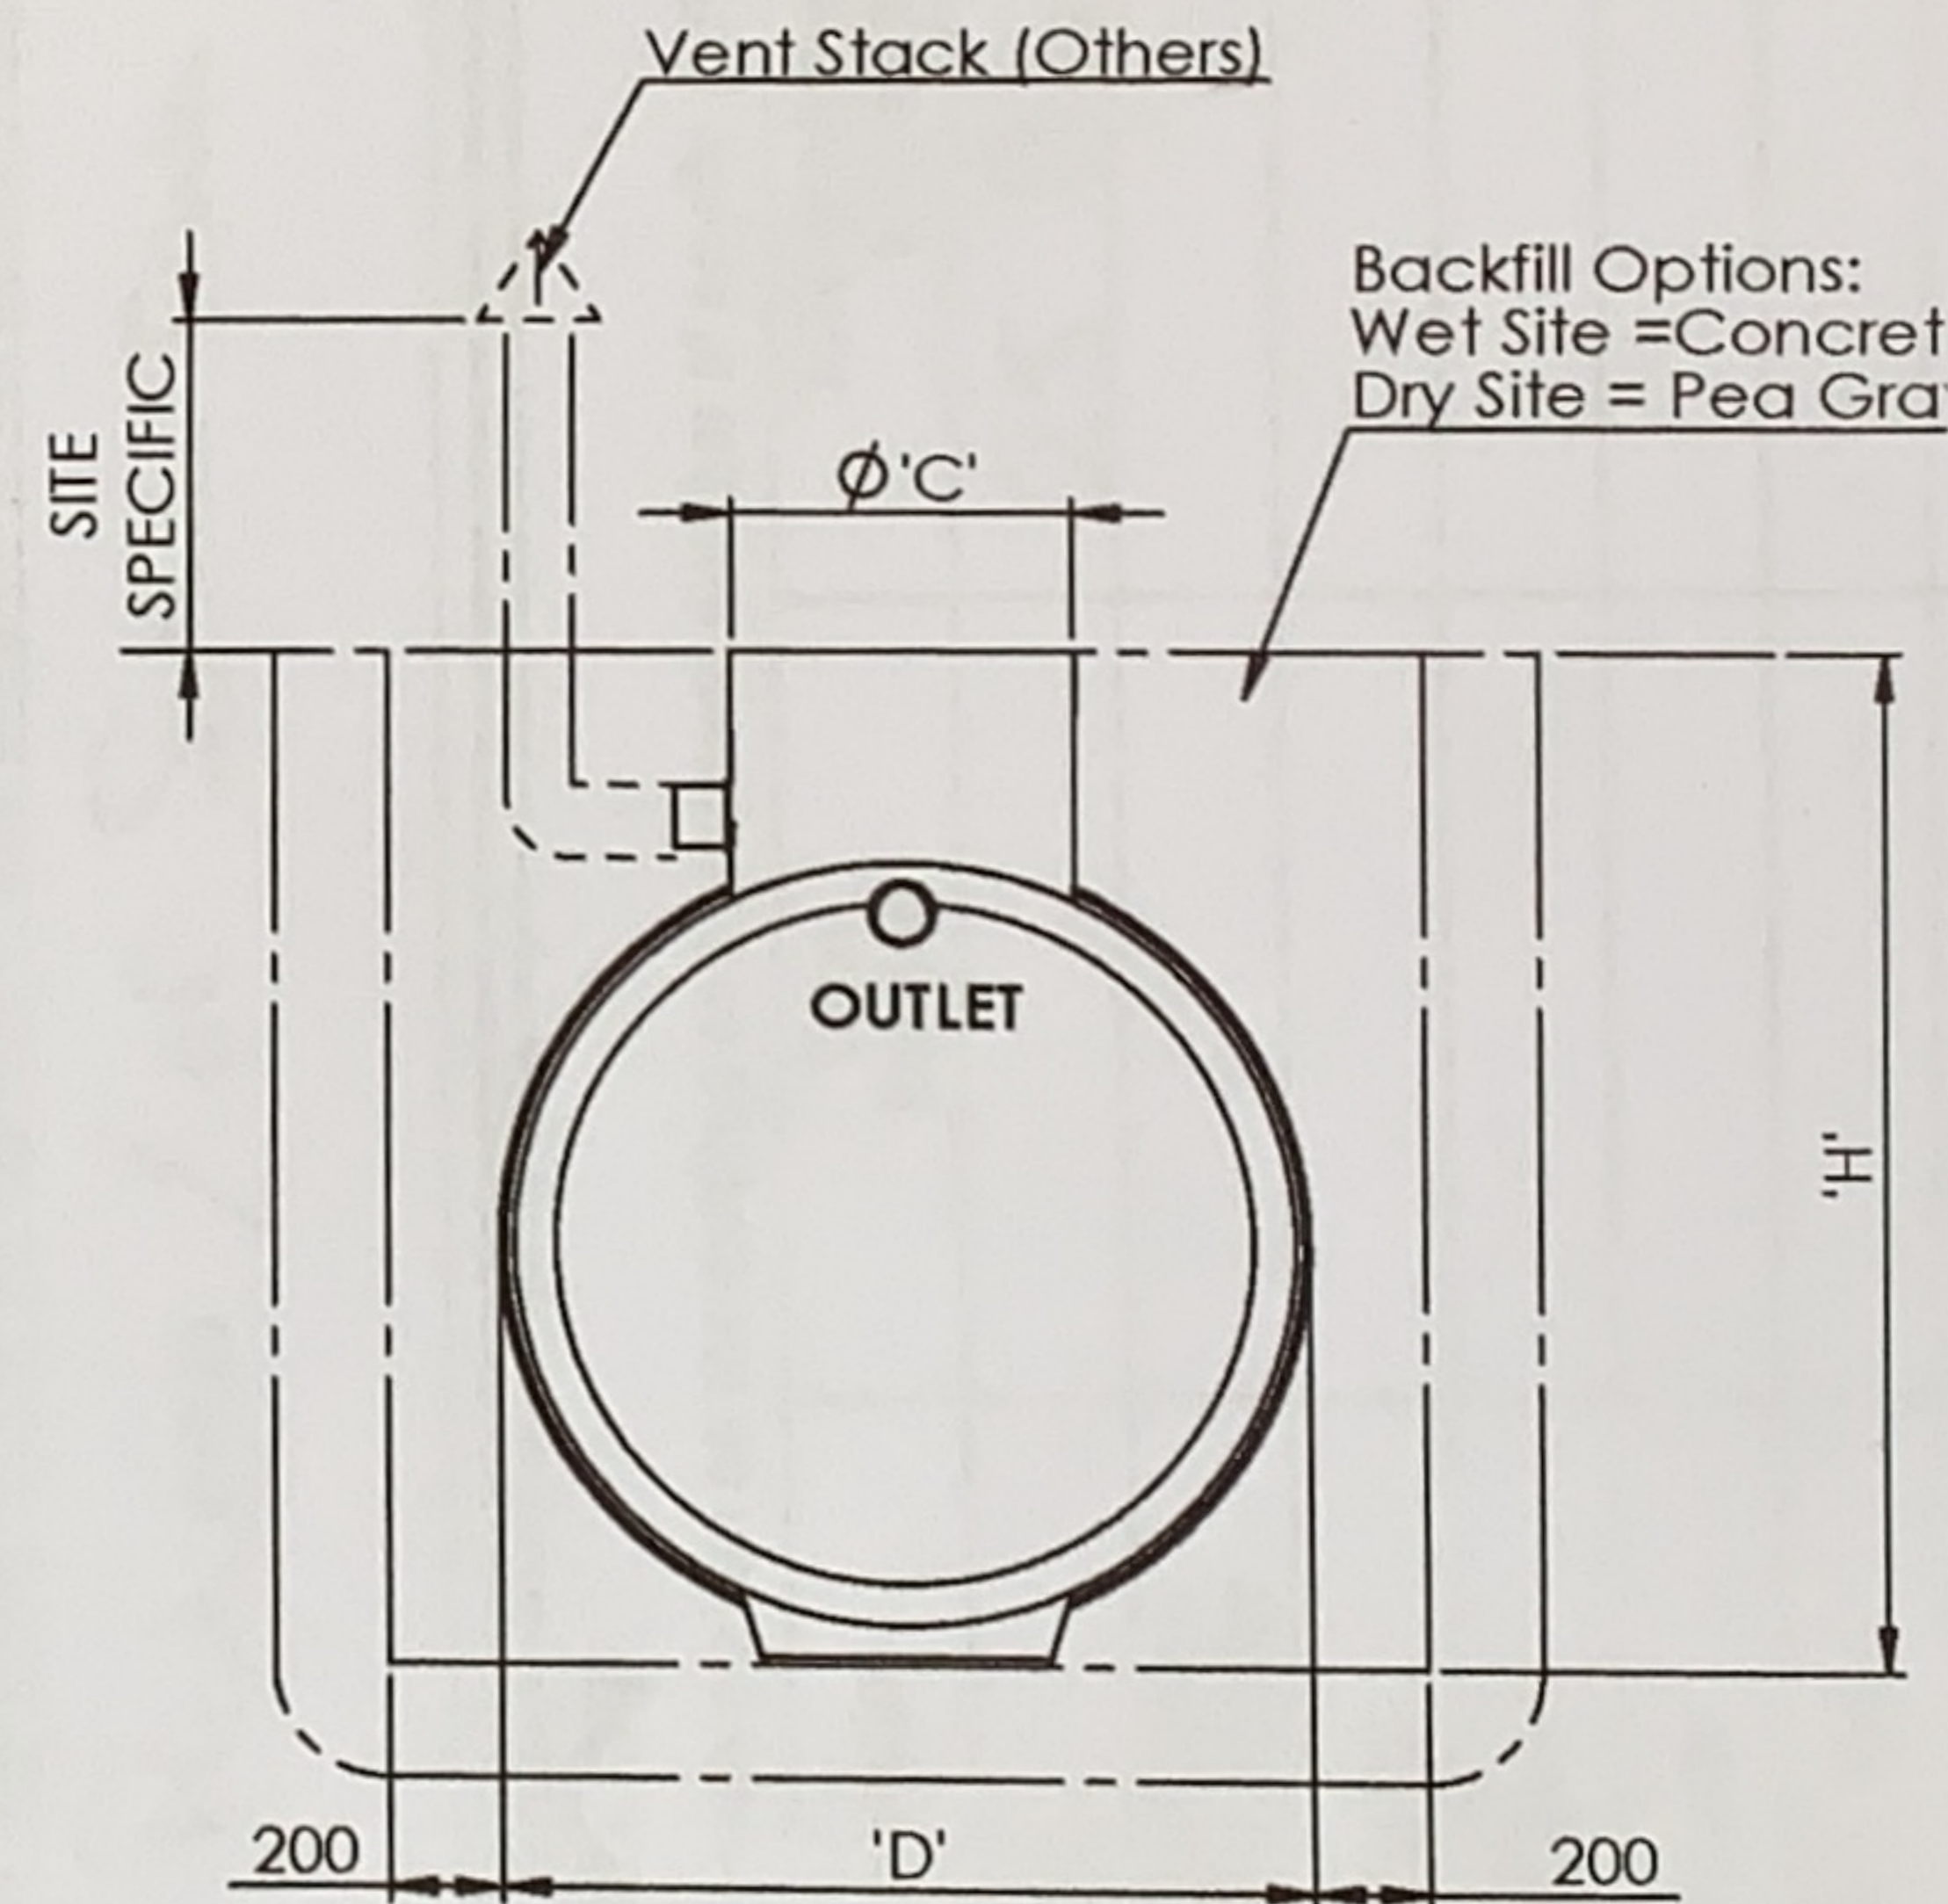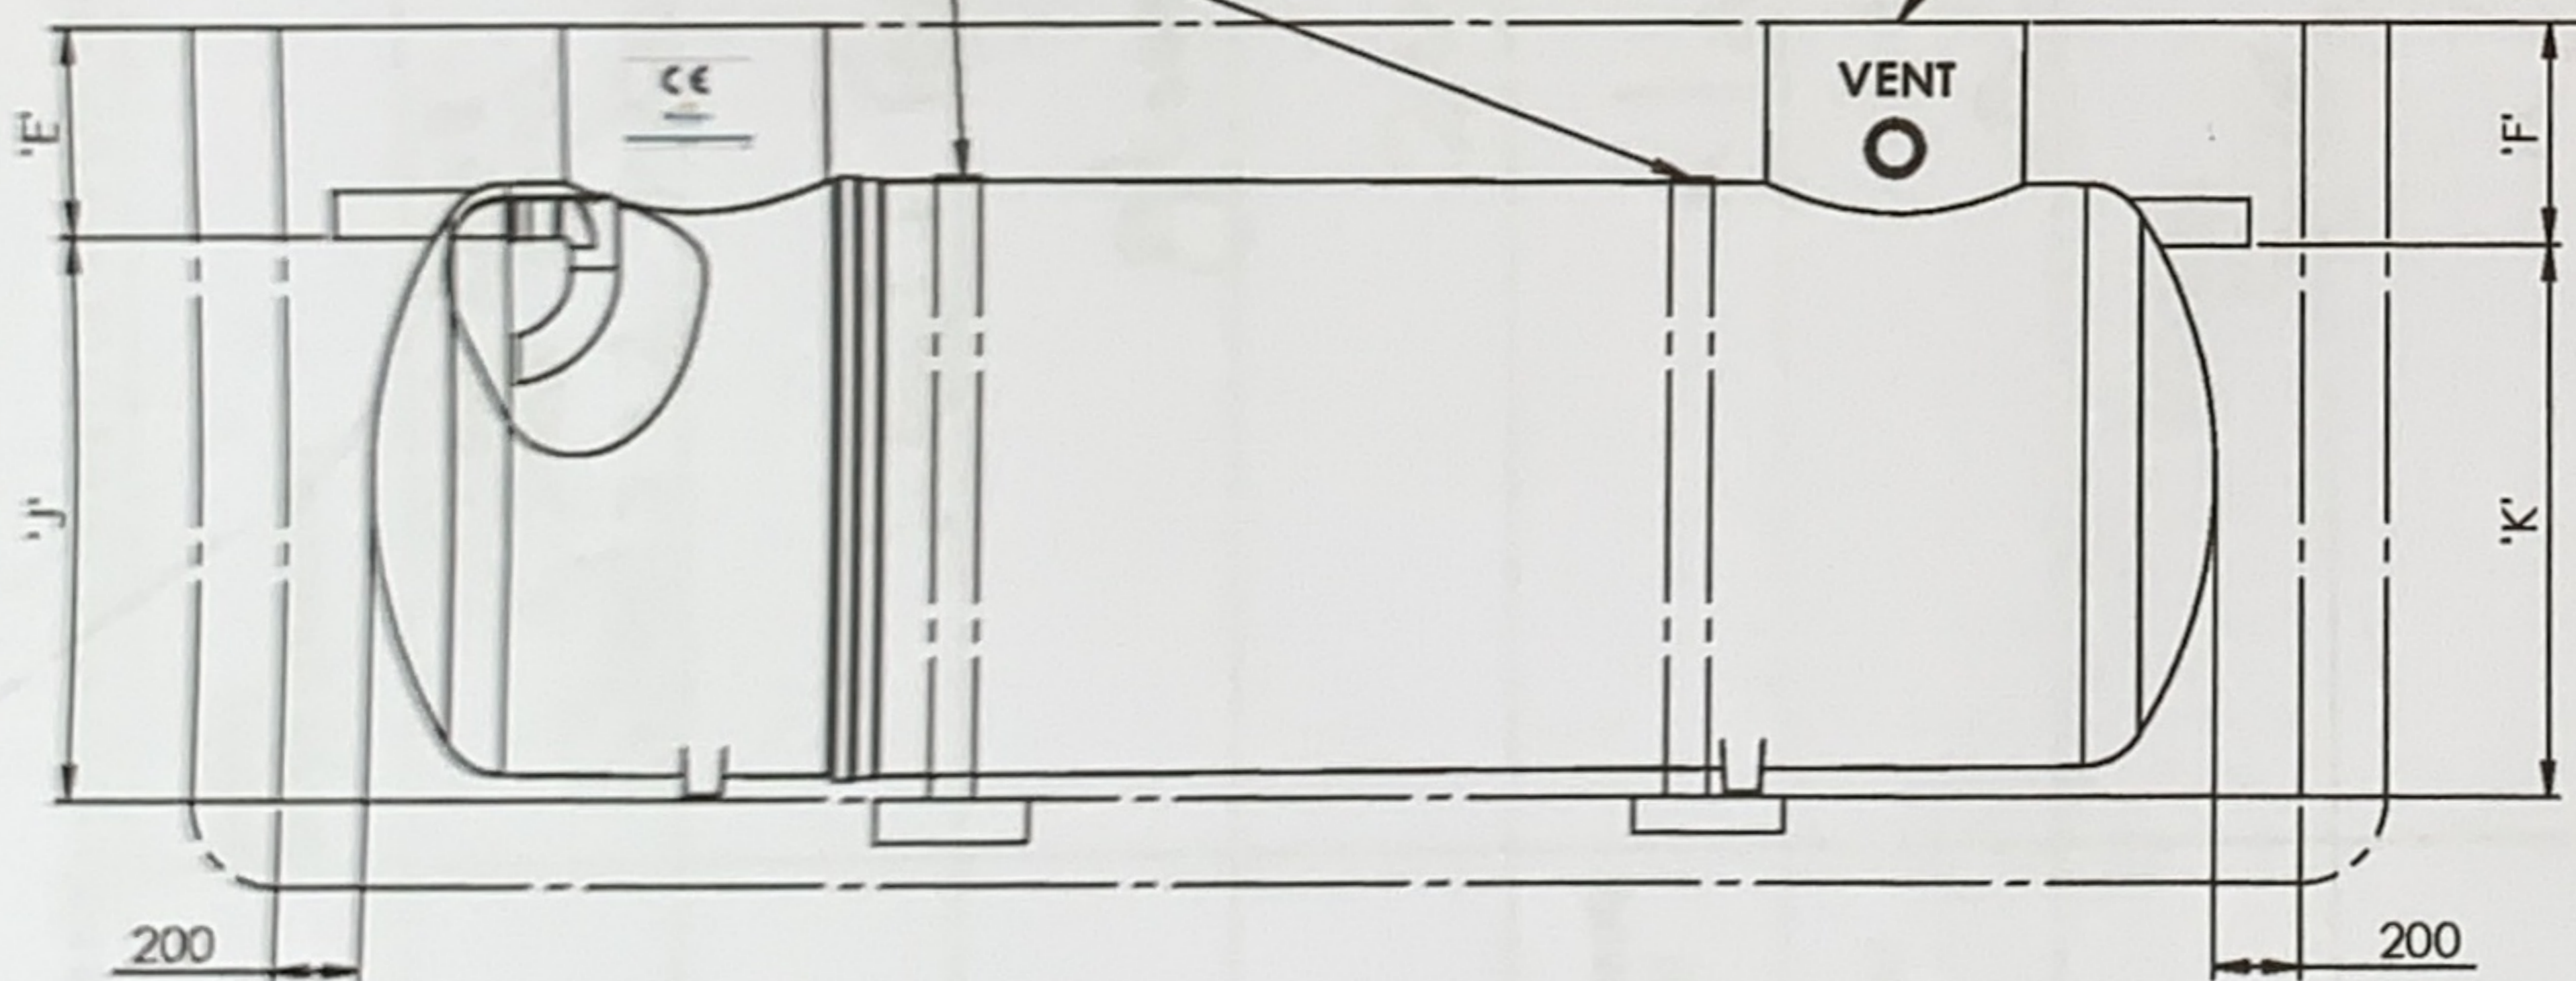

Please check with Kingspan Environmental that this drawing is the latest issue

Issue	Date	Drawn by	Approved by	Description
03	16.01.15	T.Kelly		CC1215 - Note 7 Updated
02	25/07/13	L.Steward		CC1138

Material : Various
 Finish :
 Weight : 182.41 Kg Kgs

Tolerance :
 Thickness : n/a
 Surface Area :

Drawing : DS1203
 STH Shallow Dig Septic Tank Range

All dimensions in mm

Scale: Not to scale

Kingspan Environmental reserve the right to alter the details of this drawing without prior notice. This drawing is copyright and may not be reproduced or used without the written permission of Kingspan Environmental.

