TP-CAN-A-50-13-12
CONCRETE / TIMBER FENCE POSTS

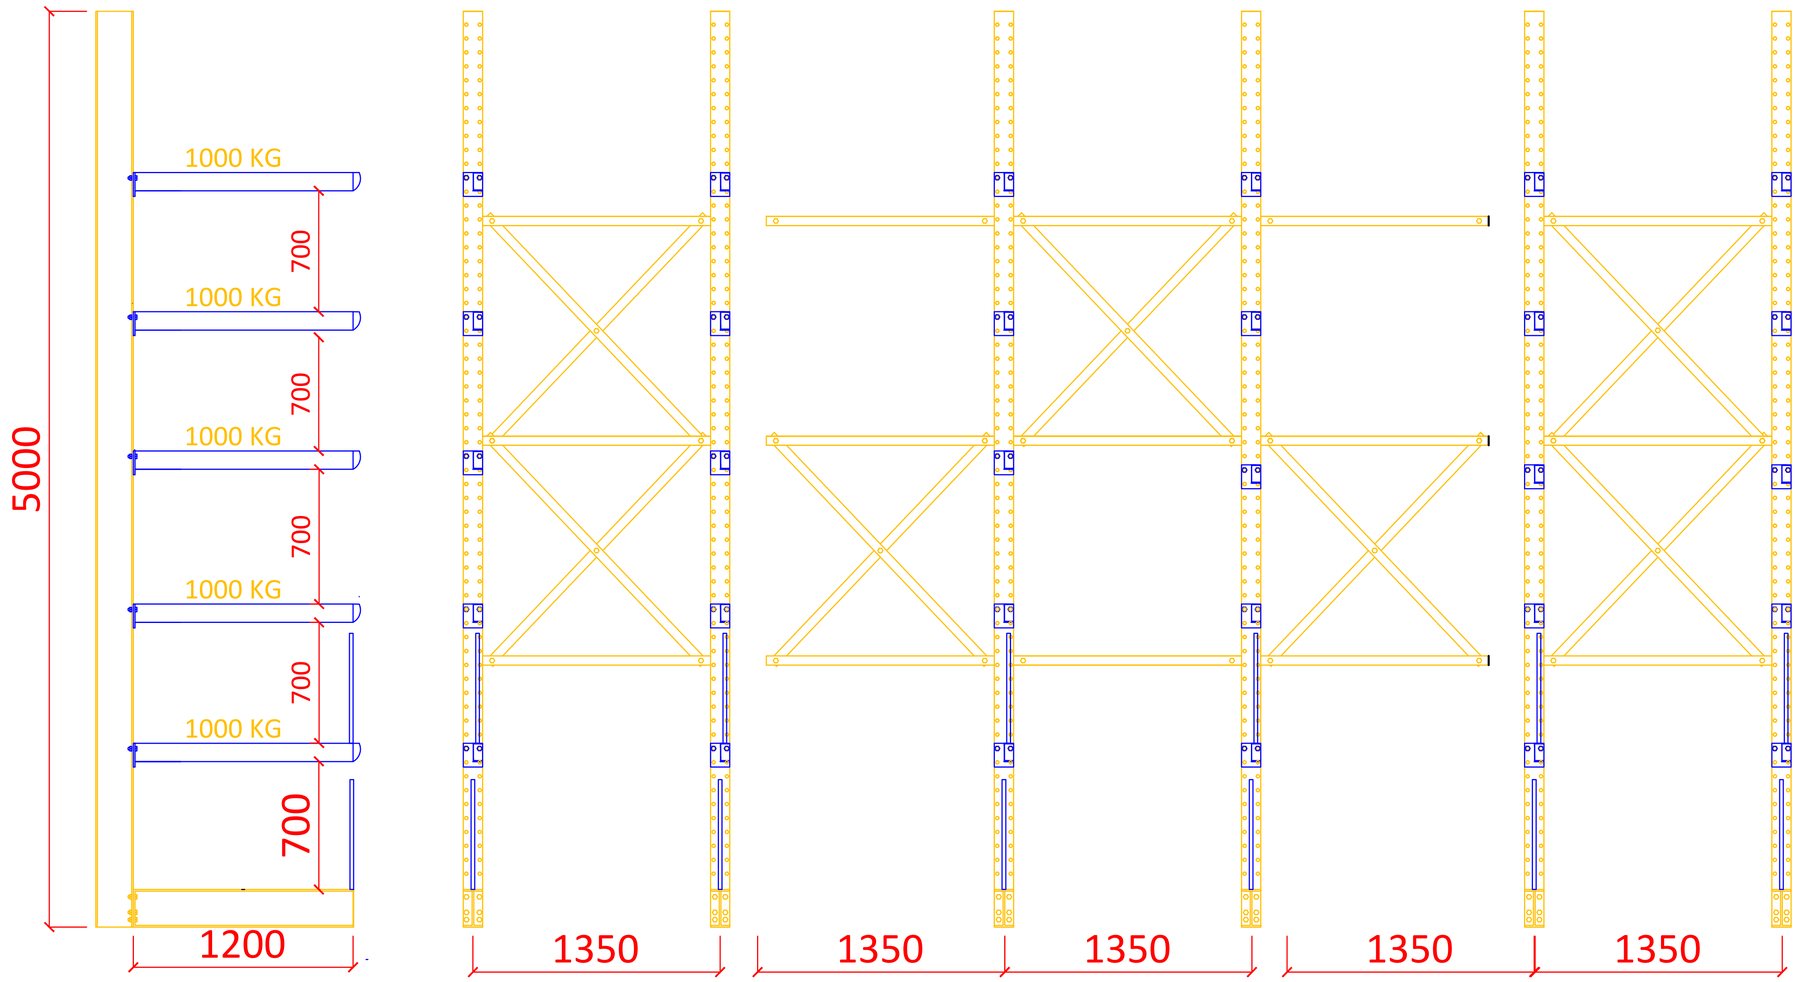

CHECK DRAWING FOR NUMBER OF UPRIGHTS
RACKING SUPPLIER TO QUOTE FOR STARTER BAY + ADD ON BAYS ACCORDING TO DRAWING

REISSUE

Component Parts(Single Bay):

5	1200mm 1000 kg arms
2	1200mm base leg
4	vertical spigot arms
2	5 m uprights

Travis Perkins

Travis Perkins plc

Travis Perkins
Group Property & Environment
Ryehill House, Ryehill Close,
Lodge Farm Industrial Estate,
Northampton.
NN5 7UA 01604 752424

General Information:

All external/exposed component parts to be hot dipped galvanized.

Coloration of all warehouse component parts to be manufacturer specific unless otherwise specified.

All 'D' arms, spigots, cage dividers and mesh guards to be Ral BS00A05 or equivalent.

Corner and frame protection posts to be included as specified

Singular runs of pallet racking to be fitted with rear mesh guards.

All external racking abutting boundary fences to be fitted with rear mesh guards above height of fence.

Singular runs of pallet racking abutting mezzanines to be fitted with rear mesh guards above level of mezzanine floor.

Weight loading notices to be positioned at the end of each racking run in most prominent location.

All newly installed beams to be rated at a minimum of 2000kg(except where identified).

Standard Timber decks to be 1350mm wide constructed from 100x50mm CLS softwood.

All costs to incorporate all fixings including locking pins and throughbolt floor fixings

Ammendment:		Date:
A.	Used for fence posts only	19.12.16
B	Changed to 5 arm levels/bay	16.5.17

Product Categories:

Concrete & Timber Fence Posts

Drawn by: TP Space(ref JM)

Profile reference: TP-CAN-A-50-13-12

Date: 16.5.17

Revision: B