
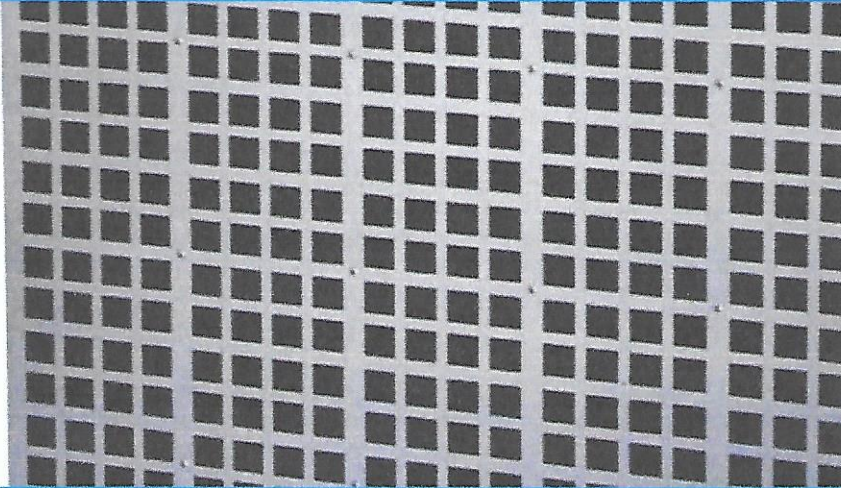


LONGAR® Type 8 Activated Carbon Filters

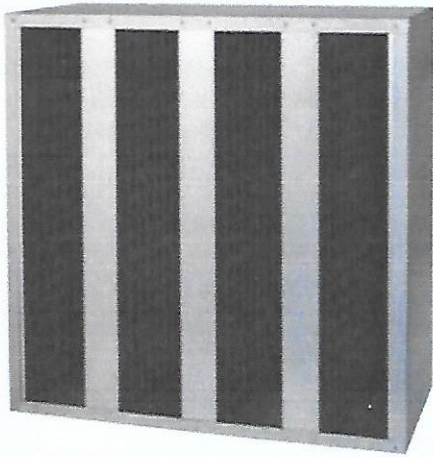

LONGAR® TYPE 8 FEATURES:

- High grade carbon / High carbon content / Low pressure loss
- Robust modular construction
- Carbon Unit or panel format / Standard and Custom sizes available
- CNC manufactured / Precision products every time

APPLICATIONS

- Reduction of Cooking Odours
- Removal of Kerosene Exhaust Fumes
- General Odour Reduction
- Neutralisation of Ammonia and its Derivatives
- Removal of Formaldehyde
- Removal of Airborne Pollutants and Contaminants
- Removal of Acid Gases (please enquire as to specific contaminant)

LONGAR® TYPE 8 ACTIVATED CARBON FILTERS

Activated carbon has for many years been used to remove airborne noxious fumes and gases. Its origins date back to the First World War, when gas masks were first filled with Activated carbon to remove chlorine gas. Today Longar produces a wide range of carbon filters to deal with a variety of air pollution scenarios.

There are many situations where carbon filtration is used to eliminate toxic or offensive odours, some of these are sewage works, hospitals, slaughterhouses, restaurant kitchens, airports, toilets, wash rooms, laboratories, and office blocks.

PRE FILTRATION

Carbon filters are designed to remove fumes and odours, they are not suitable for removing dust and fine particles. If left unprotected, the life of the carbon product is severely reduced. To protect the filters use the correct pre filtration. If you are unsure please enquire for further information.

LONGAR® TYPE 8 ACTIVATED CARBON PANELS

The Activated carbon panels are sealed into a galvanised steel frame; a screen is then added to protect the carbon surface from dust contamination. Sealing the carbon panel stops any air by-pass; our panels are manufactured using CNC technology to ensure precision manufacture with exact tolerances.

Our panels are the strongest on the market place with a wide range of standard sizes available, custom sizes are also available on request.

LONGAR® TYPE 8 ACTIVATED CARBON UNITS (ACU)

For a modular approach to fume removal the ACU is the ideal solution. The ACU unit is manufactured from a number of carbon panels held in place by a CNC made corrosion proof metal casing. The carbon panels inside the units are 25mm thick, sealed into the frames using polyurethane which eliminates the possibility of any air by-pass around the carbon.

LONGAR® TYPE 8 CYLINDRICAL FILTER

These are constructed from perforated galvanised steel then formed into cylindrical cartridges containing high grade or impregnated carbon. The cylinders have a bayonette fit into the filter mounting plate.

All cylinders have a unique feature of having the option to replace any spent carbon and then refill with new replenished carbon.

For technical specifications, part numbers and ordering information, please see overleaf.

LONGAR® Type 8

Activated Carbon Filters

FITTING INSTRUCTIONS

- Fit products in accordance with installation contractor's specifications.
- Observe direction of airflow.

HANDLING

- Handle with care when unpacking.
- Store in dry and frost protected place.

MAINTENANCE

- Carbon filters cannot be cleaned upon reaching the end of their service life. They must be replaced.
- All maintenance and replacement schedules will be set by the original equipment installer. Please refer to this for more information.
- When handling any components suitable PPE should be used – gloves, eye protection and access equipment.
- Carbon filters may be recycled.

PACKAGING

All units are packaged in double wall boxes, stapled closed for protection whilst in transit against contamination.

TECHNICAL SPECIFICATIONS

SIZE ORDERING GUIDE (TOLERANCES +/- 2mm)

Part Number	Actual Size HxWxD	Nominal Size HxWxD	Weight	Airflow M ³ /SEC @0.12 Contact	Pressure Loss - Pascals
CARBONCUBE242424	597 x 597 x 597mm	609 x 609 x 609mm	60.00kgs	1.00	97
	23.50 x 23.50 x 23.50"	24 x 24 x 24"	132.00lbs		
CARBONCUBE242418	597 x 597 x 450mm	609 x 609 x 457mm	44.00kgs	0.75	97
	23.50 x 23.50 x 17.72"	24 x 24 x 18"	96.80lbs		
CARBONCUBE241824	597 x 450 x 597mm	609 x 457 x 609mm	46kgs	0.75	97
	23.50 x 17.72 x 23.50"	24 x 18 x 24"	101.20lbs		
CARBONCUBE182424	450 x 597 x 597mm	457 x 609 x 609mm	46kgs	0.75	97
	17.72 x 23.50 x 23.50"	18 x 24 x 24"	101.20lbs		
CARBONCUBE242416	597 x 597 x 395mm	609 x 609 x 406mm	40.00kgs	0.67	97
	23.50 x 23.50 x 15.55"	24 x 24 x 16"	88.00lbs		
CARBONCUBE242412	597 x 597 x 292mm	609 x 609 x 305mm	33.00kgs	0.50	97
	23.50 x 23.50 x 11.50"	24 x 24 x 12"	72.60lbs		
CARBONCUBE241224	597 x 297 x 597mm	609 x 304 x 609mm	32.00kgs	0.50	97
	23.50 x 11.69 x 23.50"	24 x 12 x 24"	70.40lbs		
CARBONCUBE24824	597 x 197 x 597mm	609 x 203 x 609mm	19.00kgs	0.33	97
	23.50 x 7.76 x 23.50"	24 x 8 x 24"	41.80lbs		
CARBONCUBE202018	495 x 495 x 445mm	508 x 508 x 457mm	36kgs	0.52	97
	19.49 x 19.49 x 17.52"	20 x 20 x 18"	79.20lbs		
CARBONCUBE181818	450 x 450 x 450mm	457 x 457 x 457mm	28.00kgs	0.42	97
	17.72 x 17.72 x 17.72"	18 x 18 x 18"	61.60lbs		

FINAL RECOMMENDED PRESSURE DROP: 450 PASCALS

Pressure drop and airflow information available on request.



LONGAR INDUSTRIES

FILTERS AND FABRICATIONS FOR A CLEANER ENVIRONMENT

Longar Industries Limited, Unit 25, Glenmore Business Park, Colebrook Way Weyhill Road, Andover, Hampshire SP10 3GZ United Kingdom

T +44 (0)1264 332 993 F +44 (0)1264 332 994 E info@longarind.com W www.longarind.com

As part of our program for continuous improvement, Longar Ltd reserves the right to change specifications without notice. 15-01-2016.