


GENERAL NOTES

1. ALL CLADDING TO BE CE MARKED AND HOT-DIP GALVANISED TO BS EN 10346:2009.
2. ALL STEEL (INCLUDING PURLINS) TO BE CE MARKED AND TO EXECUTION CLASS 2 AS PER EN 1090 - 1:2009 AND HOT-DIP GALVANISED TO BS EN 10346:2009 Fe E390G-Z275.
3. DESIGN LOADS TO BS 6399-1:1997 AND BS 6399-3:1997. DEAD LOADS: SW CONSIDERED INTERNALLY WITHIN PROGRAMME
 -CEILINGS AND SERVICES = 0.049 kN/m²
 -RAFTER CLADDINGS AND PURLINS = 0.111 kN/m²
 -COLUMN CLADDINGS AND RAILS = 0.111 kN/m²
 -SNOW LOAD = 0.6 kN/m²
 -LIVE LOAD = 0.6 kN/m²
4. WIND LOAD ACCORDING TO BS 6399-2:1997 WITH THE FOLLOWING PARAMETERS:
 BASIC WIND SPEED = 26 m/s
 SITE ALTITUDE = 38 m
 SITE ALTITUDE FACTOR = 1.038
 SEASONAL FACTOR = 1.0
 DIRECTION FACTOR = 1.0
 SITE DISTANCE FROM SEA = Coastal
5. ALL STEEL TO HAVE YIELD STRENGTH Py = 450 MPa.

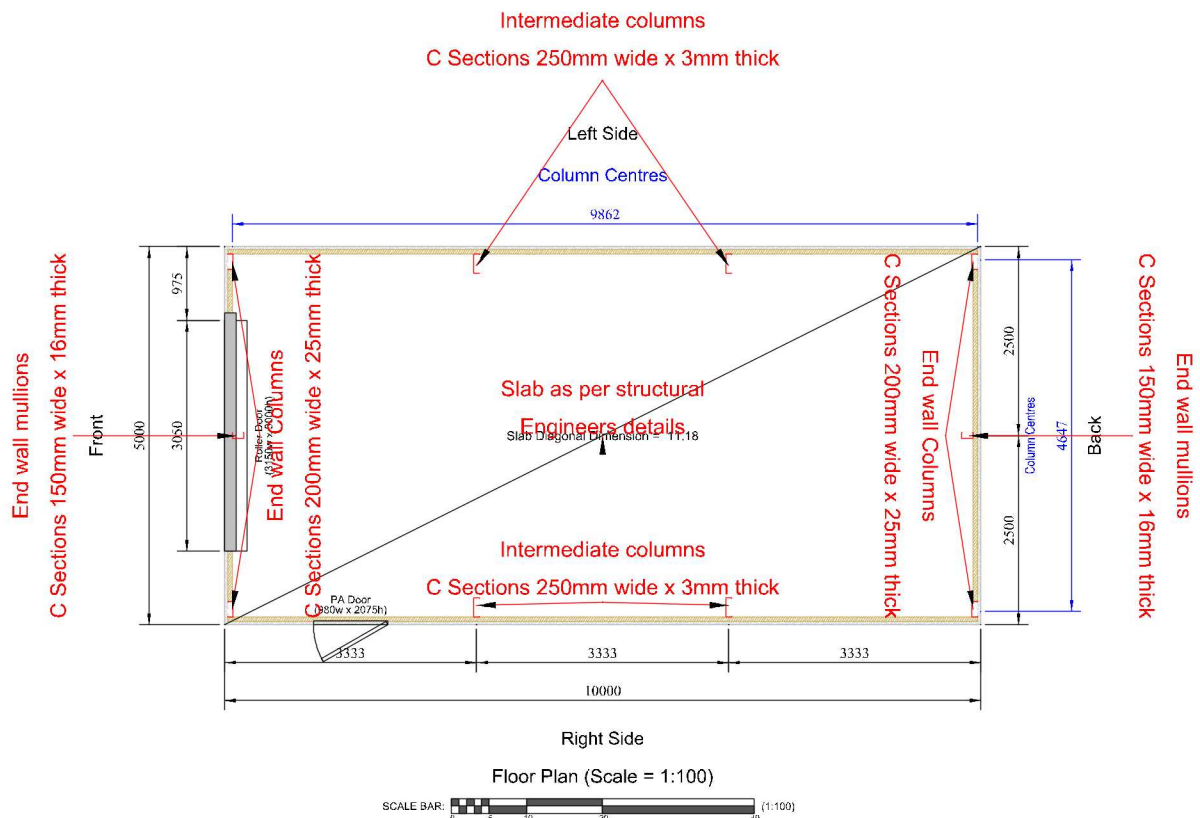

Capital Steel Limited

Web: www.capitalsteelbuildings.co.uk
 Email: info@capitalsteelbuildings.co.uk

Supplied By: Murray Steel Buildings

Phone 01383 668820
 Email louise@murraysteelbuildings.com,
peter@murraysteelbuildings.com

Customer: Russell Crockford

The Forge, Wood Enderby, BOSTON, PE22 7PG