


Leicester Multi Cream Stock



Ibstock
At the heart of building

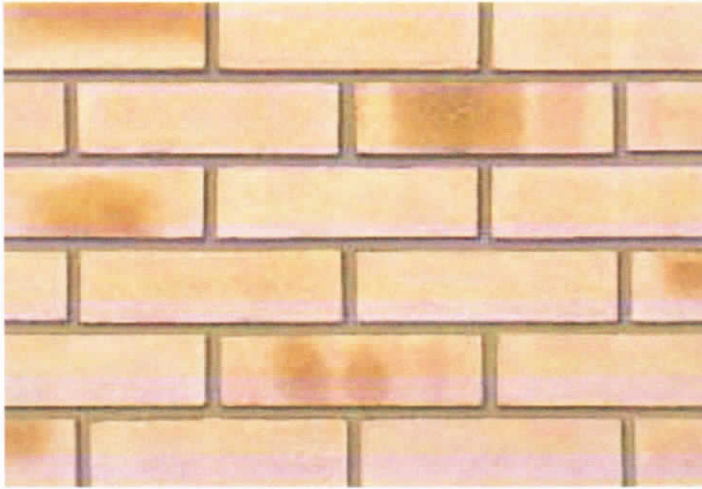


Product Information

| | |
|------------------------|------------------------------------|
| Ibstock Code: | 0189 |
| Type: | Stock |
| Facing Description: | Sandfaced |
| Dry Brick Weight (kg): | 2kg |
| Pack Quantity: | 430 |
| Packaging (standard): | Banded (plastic) & Shrinkwrap Caps |
| Factory: | Leicester |


Technical Specification (to BS EN 771-1)

| | |
|---|------------------|
| Brick Dimensions (L x W x H mm): | 215x102x65 |
| Size Tolerances Mean & Range: | T2 R1 |
| Configuration: | Single Frog |
| Voids (%): | 8-13 |
| Compressive Strength (N/mm ²): | 15 |
| Active Soluble Salts: | S2 |
| Water Absorption (% weight): | 25 |
| Durability: | F2 |
| Gross Dry Density (Sound Insulation) (Kg/m ³): | 1310 |
| Equivalent Thermal Conductivity "K" value 5% Exposed: | Refer to Ibstock |
| Initial Rate of Absorption (Suction Rate) (Kg/m ² /min): | Refer to Ibstock |
| EAN: | 5036335001738 |

Welsh Heather Blue Slate

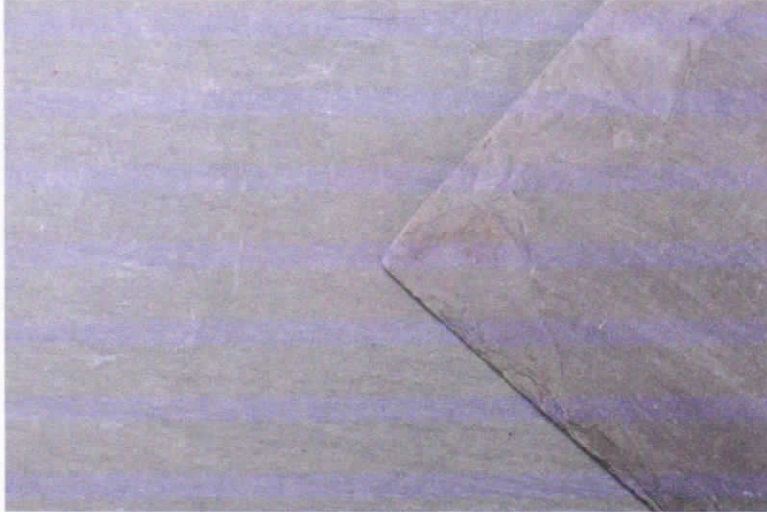

From its source near Bethesda in North Wales, Welsh slate has been used and crafted by many generations of people from all walks of life since early Roman times. Penrhyn Quarry has been at the centre and the focal point for UK natural stone and its heritage since the thirteenth-century and a major operation for over 400 years. Indeed Welsh Slate has been exporting to the known world since shipping began and its export markets continue to grow.

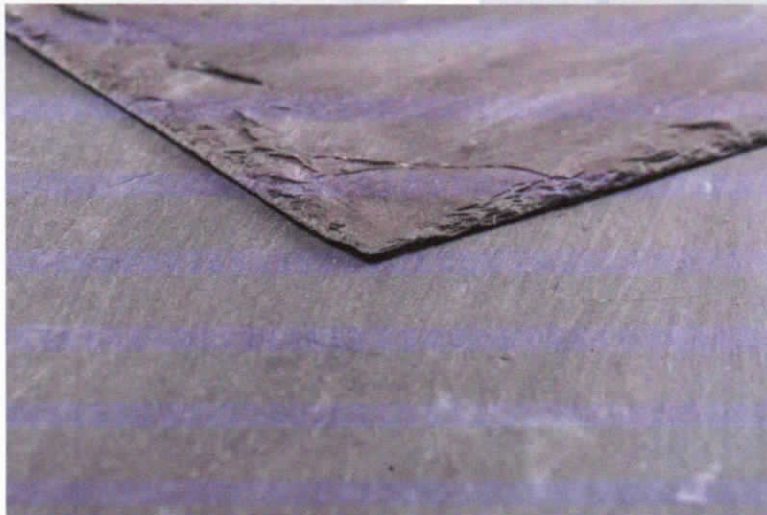

The inherent beauty and qualities of Welsh Heather Blue slate have resulted in its specification and use by architects, designers, developers and self builders around the world. The amazing heather blue, or purple colour of the slate is very rare in the industry.



The slate is available on many size and thickness specifications which can be tailored to the required aesthetics of each project. The Capital Grade, as the name suggests, are generally but not exclusively used in the South East of the country, where the very flat and thin 5.5mm nominal thickness is desirable to match what has been historically used on many of the prestigious buildings of London's skyline. The County grade at 7mm nominal thickness and the Celtic grade at 9mm are usually preferred further North where buildings are suited to a thicker more pronounced look on the roof.

Welsh Heather Blue is fully tested to BSEN12326-1:2004 and attains A1, T1 & S1 certification.

Welsh Heather Blue Slate

SLATE SPECIFICATIONS

Country of Origin:

Wales

Colours:

Heather Blue

Texture:


Medium Riven Texture

Thickness:

Capital - 5.5mm Nominal

County - 7mm Nominal

Celtic - 9mm Nominal

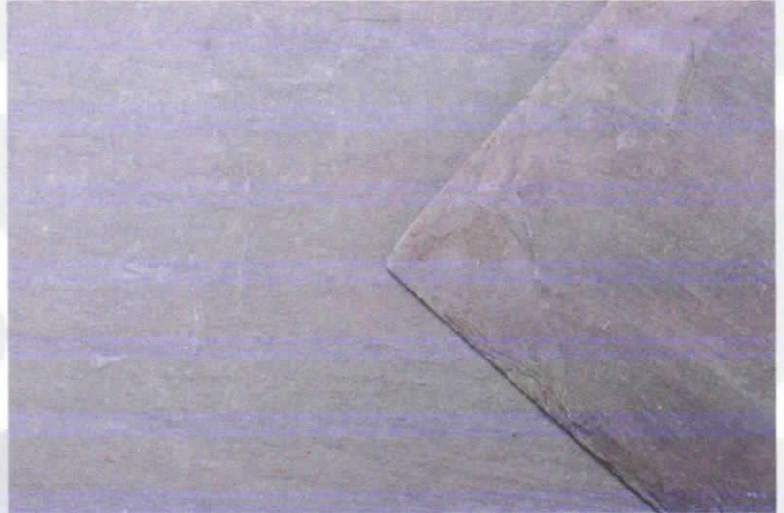

Sizes:

500x300mm 400x250mm

500x250mm 400x200mm

300x200mm

Other Size options are available.

Performance:

| | |
|-----------------------------|---|
| TESTING | BSEN12326-1:2004 |
| Water Absorption | A1 Result |
| Thermal Cycles Test | T1 Result |
| Sulphur Dioxide Test | S1 Result |
| Guarantee | 100 year quarry backed project specific guarantee. Available on request at time of order. |

Supply:

Extensive stocks are held at our distribution centres.

Nationwide and International delivery can be arranged for immediate despatch.

Unit 15 & 16, Airfield Approach Business Park
Flookburgh
Grange over Sands
Cumbria
LA11 7NG
England

Telephone: 015395 59289
Fax: 015395 58078
e-mail: Sales@slate.uk.com
Website: www.slate.uk.com

USEFUL INFORMATION CHOOSING A COLOUR

Haddonstone, TecLite and TecStone are available in the following colours:

| | Haddonstone | TecLite (TL prefix) | TecStone (G or H prefix) |
|--------------------|-------------|------------------------|-----------------------------|
| Portland 01 | ● | ● | ● |
| Bath 02 | ● | ● | ● |
| Terracotta 04 | ● | ● | ● |
| Coade 05 | □ | ● | ● |
| Slate 06 | □ | ● | ● |
| Wheat 09 | ○ | ○ | ○ |
| Ivory Limestone IL | □ | □ | □ |


□= non-standard at additional cost

○= USA only: non-standard at additional cost


●= **Standard colours are Portland 01 and Bath 02. All other colours are made on request for specific customer orders.**

Please note that throughout this catalogue the photographs show Haddonstone pieces of various ages and stages of maturity. The special qualities of Haddonstone ensure a rapid weathering of ornamental pieces, although the speed of weathering is dependent upon location and climate. The colours reproduced in this catalogue are as accurate as the printing process will permit.

Both colour samples and stone samples are available upon request - please contact your nearest Haddonstone office.

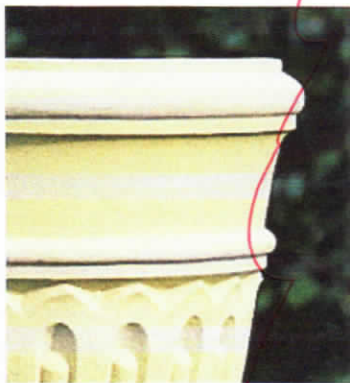

Bath 02

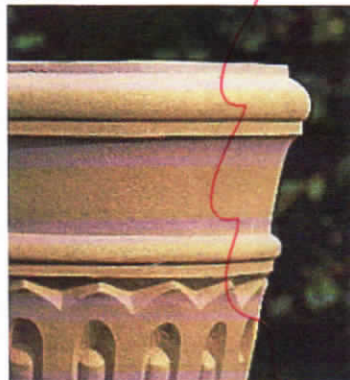

Terracotta 04



Portland 01



Coade 05



Slate 06



STONEAGE

If you want to achieve the instant aged look, so desired by many customers, then StoneAge is designed to give new stone the look of the weathered antique.


Available as an antique grey concentrate, StoneAge is a water-based formulation. It should be mixed with water before being applied by spray or brush. We recommend testing on a discreet area first.

Supplied in 237ml (8 fl oz) containers.

SEALANTS AND CLEANERS (UK only)

Haddonstone has sourced an extensive collection of stone cleaning and protection products - see www.haddonstone/sealants-cleaners

All have been rigorously tested by Haddonstone to ensure they are fit for purpose and so can be purchased with confidence. Where relevant, Health & Safety Data Sheets are available via the Haddonstone website. Please ask the UK office for a copy of the 'Additional Products' brochure containing full details.

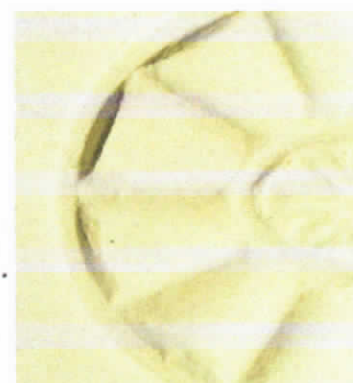

USA only: Wheat 09 (non-standard)



Ivory Limestone IL (non-standard)