

**AUTHENTIC, SUSTAINABLE, LIGHTWEIGHT SLATE**



- ✓ Educational buildings
- ✓ Commercial buildings
- ✓ Flat to pitch
- ✓ Community centres
- ✓ Vertical cladding
- ✓ Holiday homes
- ✓ Park homes
- ✓ Camping pods
- ✓ Stables
- ✓ Conservatories
- ✓ Lean to's
- ✓ Garages



**AUTHENTIC, SUSTAINABLE, LIGHTWEIGHT SLATE**


**ADVANTAGES**

- British made
- Designed to give a traditional slate appearance
- Lightweight
- Low pitch
- Does not break or crack
- Quick installation
- Cost effective
- Virtually maintenance free
- Extensive range of accessories and flashings available
- Fully dry-fixed
- Guaranteed for 40 years against weather penetration
- Full technical support available
- Recycled core material

**TECHNICAL DATA**

- Min. pitch: 14°
- Max. pitch: 90°
- Weight: 0.6kg
- Overall width: 297mm
- Overall height: 445mm
- Batten gauge: 152mm-191mm
- Roof cover per slate: 0.06m<sup>2</sup>
- Slate per m<sup>2</sup>: 18-22
- Weight as laid per m<sup>2</sup>: 12kg
- Ridge: 5.5 per linear metre
- Hip: 5.5 to 6.5 per linear metre
- Material: Recyclable blend of Polypropylene & Limestone
- Fire resistance: BS476 Part 3

**COLOURS AVAILABLE**

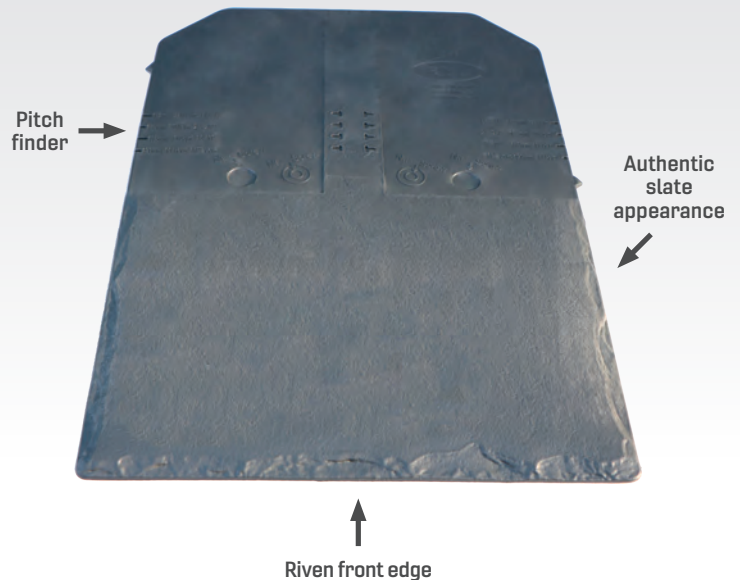

Kingfisher House, Unit 17, Overthorpe Road, Banbury OX16 4SX  
T +44 (0) 1295 250998 F +44 (0) 1295 271068 E sales@britmet.co.uk

[www.britmet.co.uk](http://www.britmet.co.uk)

**APPROVALS:**

- Manufactured using ISO 9001 approved materials
- ISO 14001