

Project: \_\_\_\_\_

Location \_\_\_\_\_

Date: \_\_\_\_\_




## LIGHTWAY 5 - OUTDOOR BEAM

### SHORT ROTATION ARM

The Lightway 5 Outdoor beam is developed for maximum performance in harsh environmental conditions. Made from extruded aluminum, this IP65 element benefits from a wide variety of outputs. The Beam compatible with a wide array of beam angles, generating a powerful overall lighting effect.

- Diverse options of beam angles: very narrow, narrow, medium, wide and elliptic.
- Delivers High levels of light.
- Integrates with any architecture.



Product Code: L5 O S1 S GT 05 PRP P6 D 65 BS 90 BI

#### Luminaire

Product Type:

Grazer

Application:

Beam

Body Material:

Extruded aluminium

Body finish:

Black Smooth

#### Installation

Environment:

Outdoor

Surface Type:


Concrete, Metal, Stone, Wood

Mounting:

Short rotation arm

Overall Dimensions with Accessories (mm):

902 \* 61 \* 131

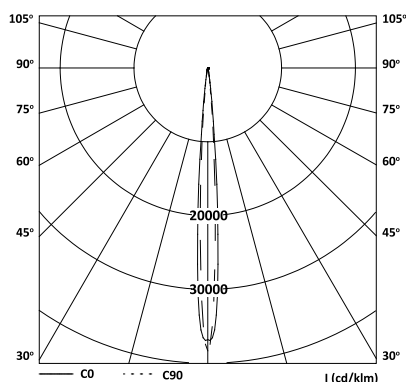

#### Light Source

Light Source:

High Power LED

Led Load:

57 W/m

Connected Load (typical):

67 W/m

Lifetime:

50000 Hrs

#### Optics

Beam Angle:

Narrow Beam, 5°

Optic Type:

UV stabilized TIR Lens

Surface diffuser:

Transparent Acrylic Filter-Purple

Shield:

Anti-Glare Shield Control

#### Electrical equipment

Control Gear:

Built-in constant current Driver

Mains Voltage:

220-240 VAC 50/60 Hz

Control Gear Efficacy:

> 85 %

Control:

Built-in driver, DALI