

Project: _____

Location: _____

Date: _____



LIGHTWAY 5 - OUTDOOR BEAM

SHORT ROTATION ARM

The Lightway 5 Outdoor beam is developed for maximum performance in harsh environmental conditions. Made from extruded aluminum, this IP65 element benefits from a wide variety of outputs. The Beam compatible with a wide array of beam angles, generating a powerful overall lighting effect.

- Diverse options of beam angles: very narrow, narrow, medium, wide and elliptic.
- Delivers High levels of light.
- Integrates with any architecture.



Product Code: L5 O S1 S GT 05 850 P3 D 65 BS 90 BI

Luminaire

Product Type:

Grazer

Application:

Beam

Body Material:

Extruded aluminium

Body finish:

Black Smooth

Installation

Environment:

Outdoor

Surface Type:



Concrete, Metal, Stone, Wood

Mounting:

Short rotation arm

Overall Dimensions with Accessories (mm):

902 * 61 * 131

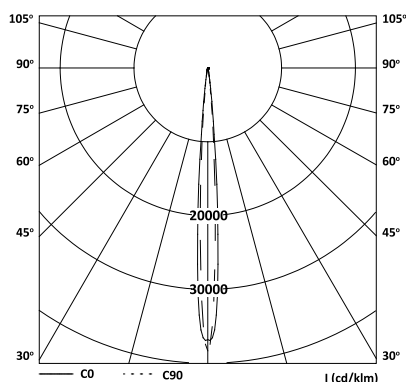

Light Source

Light Source:

High Power LED

Led Load:

42 W/m

Connected Load (typical):

49 W/m

LED Luminous Output:

4050 lm/m

Luminaire Luminous Output:

3200 lm/m

CRI & CCT:

CRI 80, 5000K

Color Deviation:

3 MacAdam ellipse

Lifetime:

50000 Hrs

Optics

Beam Angle:

Narrow Beam, 5°

Optic Type:

UV stabilized TIR Lens

Surface diffuser:

No Diffuser

Shield:

Anti-Glare Shield Control

Electrical equipment

Control Gear:

Built-in constant current Driver

Mains Voltage:

220-240 VAC 50/60 Hz

Control Gear Efficacy:

> 85 %

Control:

Built-in driver, DALI