


Project: _____

Location: _____


Date: _____

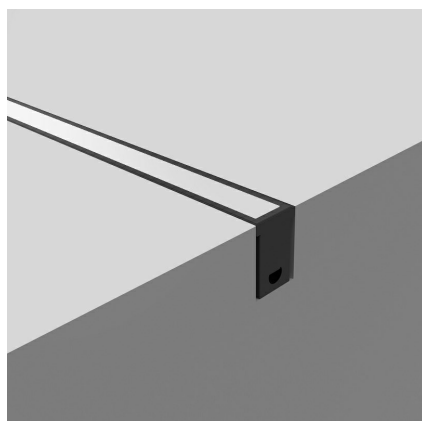

LIGHTWAY 6 – OUTDOOR OPAL INGROUND DEEP

The Lightway 6 Inground opal is developed for beautiful lighting in harsh environmental conditions. Made from extruded aluminum, this IP67 element benefits from a wide variety of outputs. This common diffuser offers powerful lighting and excellent light transmission with high diffusion and homogeneity.

- Superior optical transmission with no visible LED hotspots
- Wide, even levels of illumination
- High angle distribution to illuminate adjacent walls
- Great color mixing capability
- IK10



Product Code: L6 O ID AO XX 940 L4 C 67 BS N I 120 I

Luminaire

Product Type:	Ambient
Application:	Opal Diffuser
Body Material:	Extruded aluminium
Body finish:	Black Smooth
Glass Cover:	Black Serigraphy

Installation


Environment:	Outdoor
Surface Type:	Concrete
Mounting:	Inground Deep
Layout:	I Shape
Overall Dimensions with Accessories (mm):	1199 * 90 * 133
Cutout Dimensions (mm):	1202 * 93 * 134.5
Weight (Kg):	7.1

Light Source

Light Source:	Mid Power LED
Led Load:	30 W/m
Connected Load (typical):	35.29 W/m
LED Luminous Output:	4050 lm/m
Luminaire Luminous Output:	1850 lm/m
CRI & CCT:	CRI 90, 4000K
Color Deviation:	3 MacAdam ellipse
Lifetime:	50000 Hrs

Optics

Beam Angle:	N/A
Optic Type:	PMMA Opal Lens
Surface diffuser:	Acrylic Opal Diffusing Lens

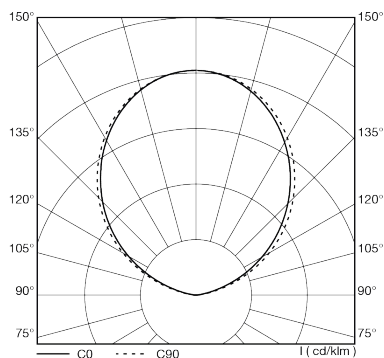

Electrical equipment

Control Gear:	Built-in constant current Driver
Mains Voltage:	220-240 VAC 50/60 Hz
Control Gear Efficacy:	> 85%
Control:	Built-in driver, non-dimmable
Emergency:	No Emergency