


sign E
Cornmarket st fascias
Right Fascia Size: 1,600mm x 765mm + 30mm upstand
3mm aluminium powder coated to match RAL 5013,
supplied with fixing rails, 100mm deep
projecting sign (Sign G) centred




Sign F
Welcome tray panels
Sizes as Shown
3mm aluminium powder
coated to match RAL 5013,
supplied with fixing rails,

Sign G
600 x 600mm projecting sign -
fit to Centre of Right Fascia
graphic cut in projecting sign, backed and pushed through opal acrylic,
green vinyl to face of cross, approx 2 / 3mm projecting*, back illuminated with LED,
lighting tray to rear of cross.
Logo height: 520mm

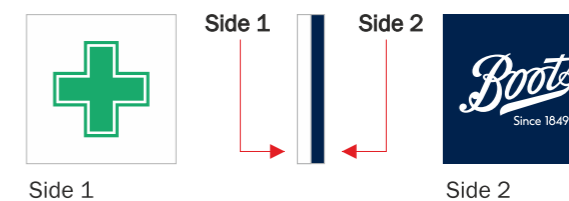


Sign A
Cornmarket st fascias
Fascia Size: 1,620mm x 765mm + 30mm upstand
3mm aluminium powder coated to match RAL 5013,
supplied with fixing rails, 100mm deep.
Cross cut from 8mm opal 050 acrylic, pushed through approx 3mm,
all acrylic being back lit with LED trays,
cross having an applied translucent green vinyl with white keyline.

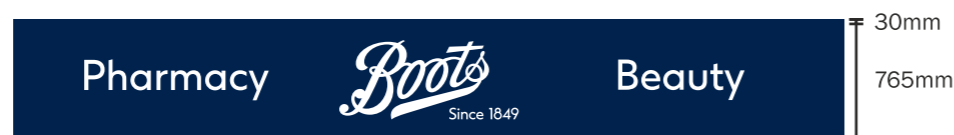

Sign B
Cornmarket st fascias
Fascia Size: 5,490mm x 765mm + 30mm upstand
3mm aluminium powder coated to match RAL 5013, supplied with fixing rails,
100mm deep. 'Boots since 1849' cut in 10mm 1T77 LED acrylic,
pushed through approx 5mm. Acrylic category text cut in 8mm opal 050 acrylic,
pushed through approx 3mm, all acrylic being back lit with LED trays.
Cap height of 'P' in Pharmacy = 203mm
Logo height: 520mm



Sign C
Cornmarket st fascias
Fascia Size: 3,055mm x 765mm + 30mm upstand
3mm aluminium powder coated to match RAL 5013, supplied with fixing rails,
100mm deep. 'Boots since 1849' cut in 10mm 1T77 LED acrylic,
Logo height: 520mm

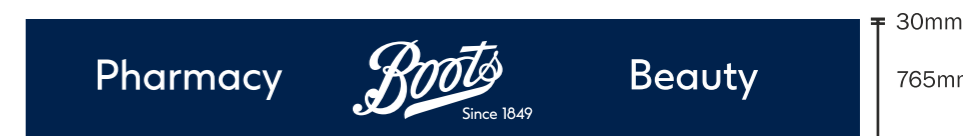

Sign D
Cornmarket st fascias
Fascia Size: 5,510mm x 765mm + 30mm upstand
3mm aluminium powder coated to match RAL 5013, supplied with fixing rails,
100mm deep. 'Boots since 1849' cut in 10mm 1T77 LED acrylic,
pushed through approx 5mm, Acrylic category text cut in 8mm opal 050 acrylic,
pushed through approx 3mm, all acrylic being back lit with LED trays.
Cap height of 'P' in Pharmacy = 203mm
Logo height: 520mm

BOOTS - OXFORD - CORNMARKE ST - 330 - 141285



Contact details

19 Oxleasow Road,
East Moons Moat,
Redditch,
B98 0RE
T: 01527 504 250
F: 01527 504 251
W: www.sign-specialists.co.uk
E: enquiries@sign-specialists.co.uk



ISO Approved

Rev dates

B) -
C) -
D) -
E) -
F) -
G) -
H) -
I) -
J) -
K) -

Customer - Boots
Location - 6-8 Cornmarket St, Oxford OX1 3HL
Date drawn - 5th January 2021
File Location - J:\The Boots Company PLC