
EXISTING TO NEW WALL

Cavities in new wall to be made continuous with existing where possible to ensure continuous weather break. If a continuous cavity cannot be achieved, where new walls abuts the existing walls provide a movement joint with vertical DPC. All tied into existing construction with suitable proprietary stainless steel profiles.

WALL TIES

All walls constructed using stainless steel vertical twist type retaining wall ties built in at 750mm ctrs horizontally, 450mm vertically and 225mm ctrs at reveals and corners in staggered rows. Wall ties to be suitable for cavity width and in accordance with BS EN 845.

foundations, beams, walls and lintels carrying new and altered loads are to be exposed and checked for adequacy prior to commencement of work and as

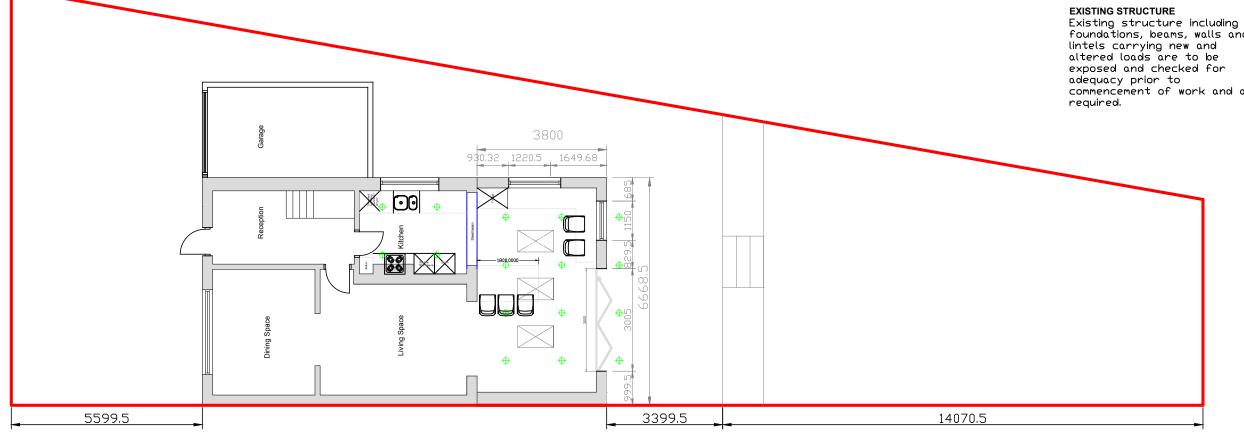

Proposed Ground Floor Plan

Single Storey Rear Extension

7 Paulden Avenue, Wythenshawe M23 1PH

Drawing:

Proposed Ground Floor plan

Drawing No:

270719-03

Drawn: Victor [].	Date: 13/07/21
Scale:	Paper Size.
1:100	A3