



ILLUM FLEX SIGNCASES



Section A-A Scale 1:10

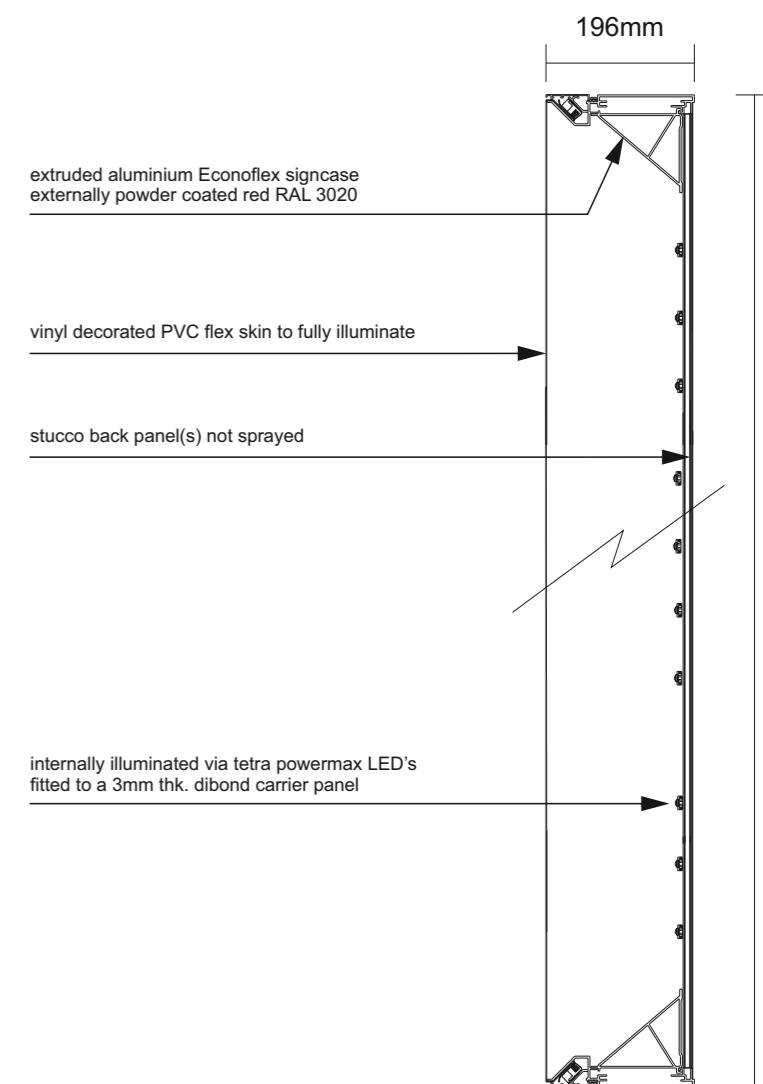

Specification

1-OFF Extruded Econoflex aluminium box, powder coated red RAL 3020 30-40% matt finish.
 Back panel manufactured from stucco (not sprayed) as not visible from behind.
 Vinyl decorated PVC flex skin stretched over face having red background face applied in 3M 3630-33 vinyl with text weeded out to show thru white skin.
 Signcase fully illuminated via GE tetra powermax 4100 colour temperature LED's (5 mods per metre) mounted onto a 3mm thk. white dibond carrier panel.

NOTE

All dimensions are approx and subject to survey

**LED layout is visual only
 LED's required = 37 wide x 9 high
 = 333 modules total**

Office:

Copyright:

Client:

Job Number & Site: Date:

Scale:

Notes:



Unit 3-4 Arden Park, Arden Road,
 Frankley, Birmingham, B45 0JA.
 T +44 (0) 121 4577715
 F +44 (0) 121 4539355
 www.blazesigns.co.uk

DRAWING SHOWN FOR VISUAL PURPOSES ONLY. ACTUAL SIGNAGE CONSTRUCTION (MANUFACTURE, MATERIALS & TECHNIQUES) MAY DIFFER TO THOSE SHOWN & ARE SUBJECT TO FINAL SITE CONDITIONS
 BLAZE STANDARD PAINT FINISH IS 60% SEMI GLOSS.
 CLIENT TO ADVISE PRIOR TO APPROVAL IF ANY SPECIAL FINISHES ARE REQUIRED

© THE COPYRIGHT OF THIS DRAWING IS OWNED BY BLAZE SIGNS LIMITED AND IS NOT TO BE DISCLOSED TO OTHER PERSONS OR TO BE USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION.



132198
OXFORD

08/02/21

1:40 @ A3

COLOUR REF:	RAL	COLOUR REF:	PANTONE
	3020		<input type="checkbox"/>
	7015		<input type="checkbox"/>
			<input type="checkbox"/>