



# ILLUM FLEX SIGNCASES



## Section A-A Scale 1:10

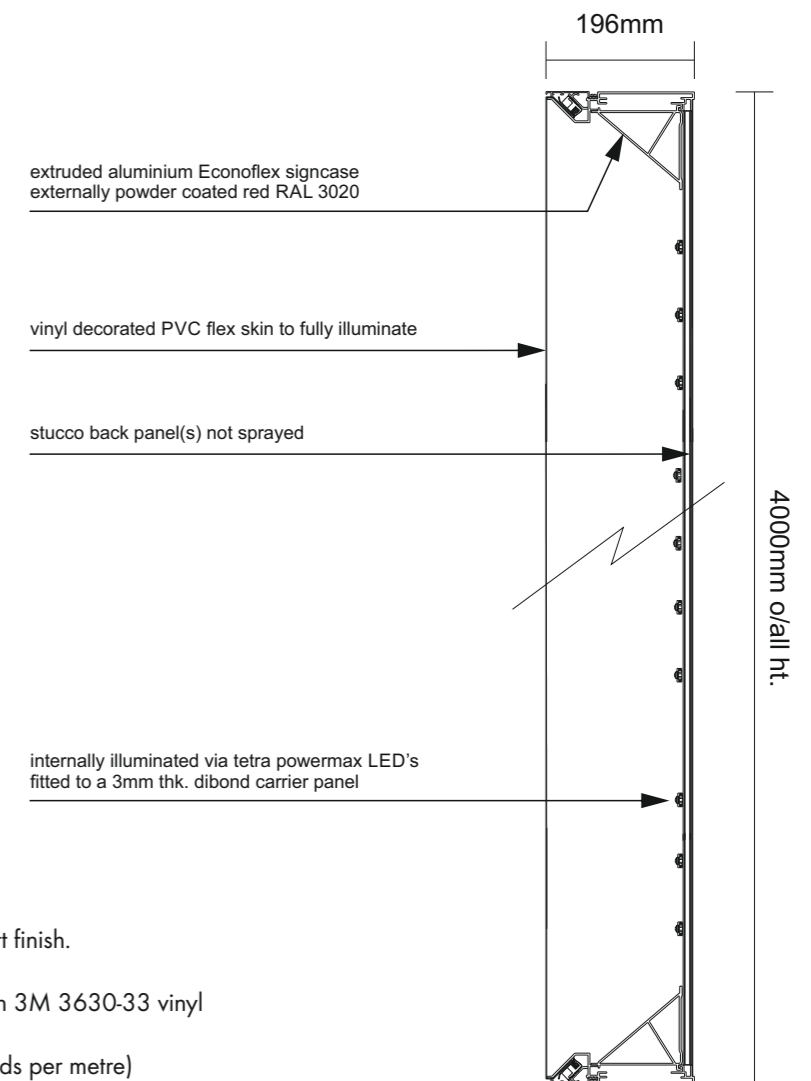

### Specification

**1-OFF** Extruded Econoflex aluminium box, powder coated red RAL 3020 30-40% matt finish.  
 Back panel manufactured from stucco (not sprayed) as not visible from behind.  
 Vinyl decorated PVC flex skin stretched over face having red background face applied in 3M 3630-33 vinyl with text weeded out to show thru white skin.  
 Signcase fully illuminated via GE tetra powermax 4100 colour temperature LED's (5 mods per metre) mounted onto a 3mm thk. white dibond carrier panel.

### NOTE

**Fixing grounds behind flex sign & cladding to be provided by landlord**  
**All dimensions are approx and subject to survey**

**LED layout is visual only**  
**LED's required = 29 wide x 19 high**  
**= 551 modules total**

Office:

Copyright:

Client:

Job Number & Site: Date:

Scale:

Notes:



Unit 3-4 Arden Park, Arden Road,  
 Frankley, Birmingham, B45 0JA.  
 T +44 (0) 121 4577715  
 F +44 (0) 121 4539355  
 www.blazesigns.co.uk

DRAWING SHOWN FOR VISUAL PURPOSES ONLY. ACTUAL SIGNAGE CONSTRUCTION (MANUFACTURE, MATERIALS & TECHNIQUES) MAY DIFFER TO THOSE SHOWN & ARE SUBJECT TO FINAL SITE CONDITIONS  
 BLAZE STANDARD PAINT FINISH IS 60% SEMI GLOSS.  
 CLIENT TO ADVISE PRIOR TO APPROVAL IF ANY SPECIAL FINISHES ARE REQUIRED

© THE COPYRIGHT OF THIS DRAWING IS OWNED BY BLAZE SIGNS LIMITED AND IS NOT TO BE DISCLOSED TO OTHER PERSONS OR TO BE USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION.



**132198**  
**OXFORD**

08/02/21

1:50 @ A3

COLOUR REF:	RAL	COLOUR REF:	PANTONE
	3020		<input type="checkbox"/>
	7015		<input type="checkbox"/>
			<input type="checkbox"/>