

÷	140 m	→ ∕
Finish Area		Start Platform


Zipwire Profile (NTS)

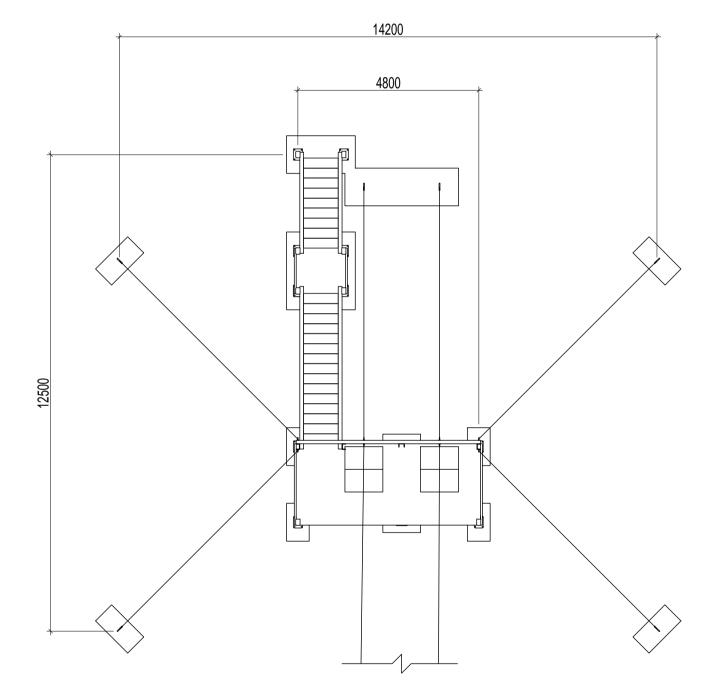


Plan of Zipwire Start Platform

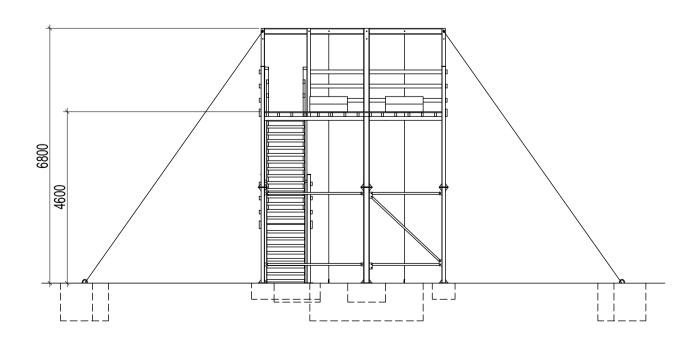

Elevation A Zipwire Start Platform

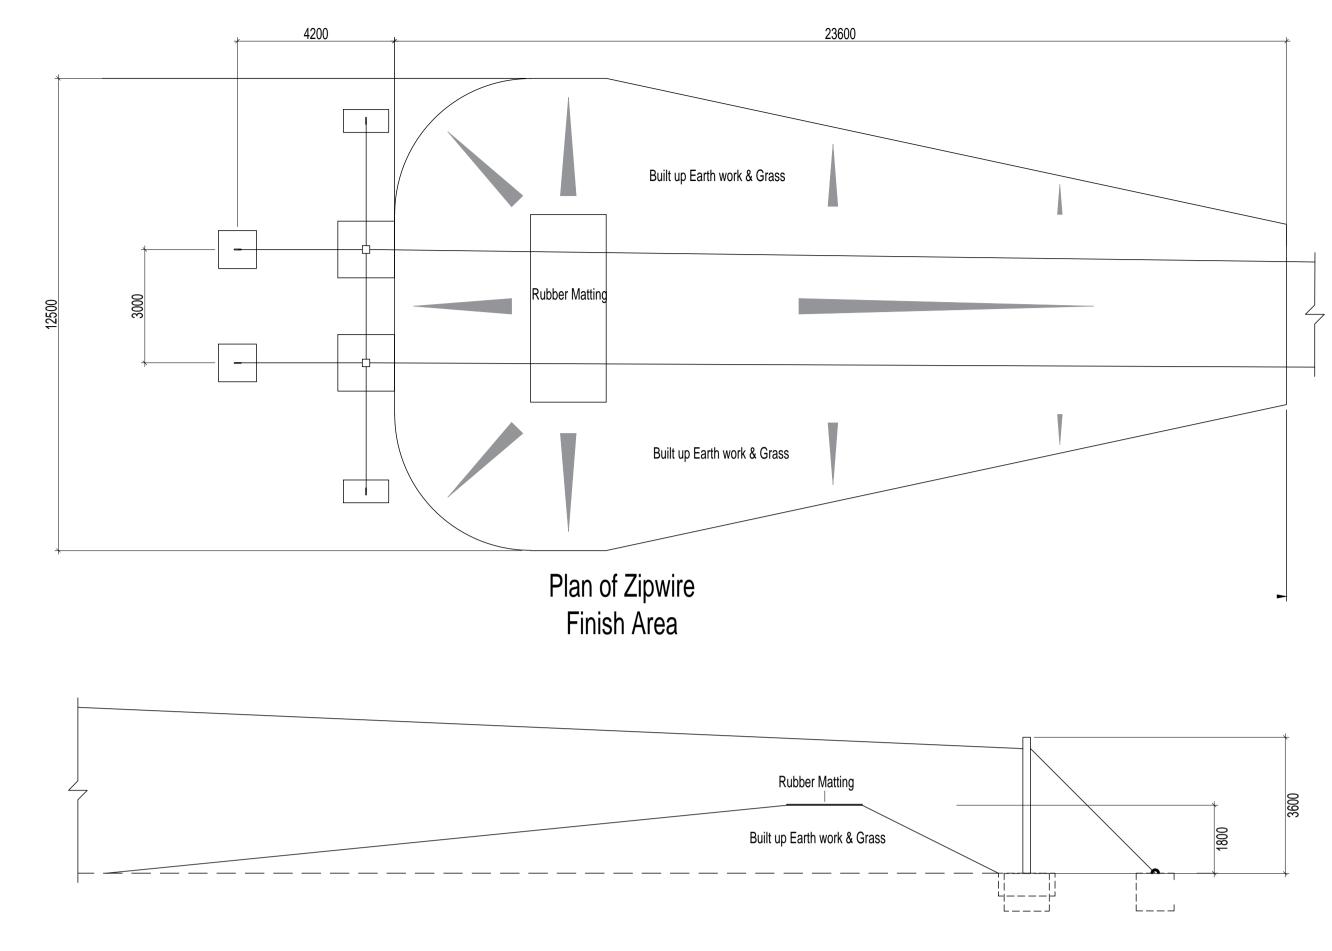

Elevation of Zipwire Finish Area

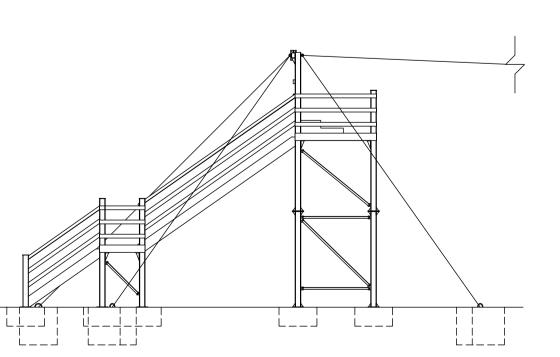

NOTES:

1) ALL DIMENSIONS ARE IN MILLIMETERS UNLESS STATED OTHERWISE

2) DETAILS INDICATIVE ONLY

3) ALL EXCAVATED MATERIAL TO BE RETAINED ON SITE

4) ZIPWIRE START PLATFORM AND FINISH COLUMNS TO BE STEEL CONSTRUCTION

5) ALL STEELWORK TO BE GRADE S355 J2 FOR HOT ROLLED SECTIONS PLATES & FLATS IN ACCORDANCE WITH BS EN 10025 OR GRADE S355 J2H FOR HOT FORMED HOLLOW SECTIONS IN ACCORDANCE WITH BS EN 10210

6) ALL STEELWORK TO BE HOT DIP GALVANIZED IN ACCORDANCE WITH BS EN ISO 1461 ON COMPLETION OF FABRICATION TO A MINIMUM THICKNESS OF 85 MICRONS

7) ALL STEELWORK TO BE POLYESTER POWDER COATED IN ACCORDANCE WITH BS EN 13438 APPLICATION - CORROSIVITY CLASS C3 COLOUR - RAL 6005, MOSS GREEN

8) ZIPWIRE FINISH AREA TO BE RUBBER MATTING ON EARTHWORK MOUND

Refer to drawing no. AF- 003 for Zipline location

