





The Match is one in a range of HiLux high performance luminaires designed for use in sports lighting

Match 107/WB 17B

| | |
|------------------------|------------------------|
| Box quantity | 1 |
| Net Weight | 25 kg |
| Body colour (standard) | RAL6005 |
| Optic | Wide beam |
| IP rating | IP65 |
| Windage | 0.21m ² |
| Mounting method | 4 x M10 factory fitted |

| | |
|-----------------|-----------------|
| Number of lamps | 1 |
| Lamp type | MV / E40 |
| Lamp power | 1000 W |
| Lamp colour | 4200 K |
| Lamp Access | Via front glass |
| Supply voltage | 400v |

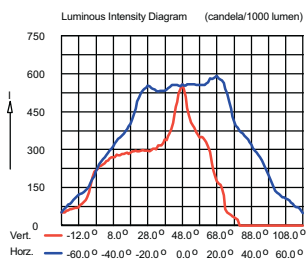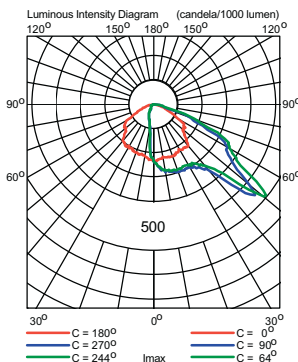

HiLux™

Match®


- ✓ Exceptional light control
- ✓ Flat glass asymmetric technology
- ✓ Fully shielded
- ✓ Designed for outdoor sports lighting
- ✓ Stainless steel components
- ✓ 6mm hinged safety glass
- ✓ Computer designed reflector
- ✓ Non-tarnish reflector
- ✓ Super high reflectance material
- ✓ Super low glare reflectance material
- ✓ Heavy duty mounting
- ✓ IP65 ingress protection
- ✓ Easy, one tool lamp change
- ✓ Pre flexed and tested (option)
- ✓ Powder coat finish (RAL 6005)
- ✓ UK manufactured
- ✓ 5 year limited warranty via direct install *
- ✓ 3 year limited warranty via distributor *
- ✓ 10 year limited extended warranty *

Ordering codes:

MATCH/107/WB/17B Luminaire

Options

- /C Alternative colour finish
- / Deflector (front/FD, rear/RD, side/SD)
- /LL Lamp (supplied loose)
- /LFT Lamp & flex installed and tested
- /G Lamp gear (supplied loose)

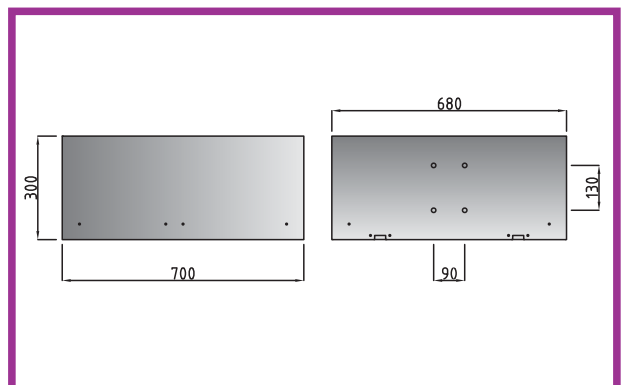

* Conditions apply

luminance pro
lighting systems

Tel: +44 (0)1276 855 666
Fax: +44 (0)1276 855 999

info@luminancepro.co.uk
www.luminancepro.co.uk