

Product Datasheet

Aluminium Gutter Systems

Ref: PD001RW

Heritage Cast Aluminium Gutters


A full range of traditional gutter profiles with simple spigot joints, wet sealed and bolted with an extensive range of fixing options. Heritage gutters are manufactured using modern aluminium casting techniques and are factory finished. The range comprises two standard gutter lengths - 610mm (3ft), 1830mm (6ft).



Half Round
100mm (4"), 113mm (4.5"), 125mm (5")




Beaded Half Round
113mm (4.5"), 125mm (5")

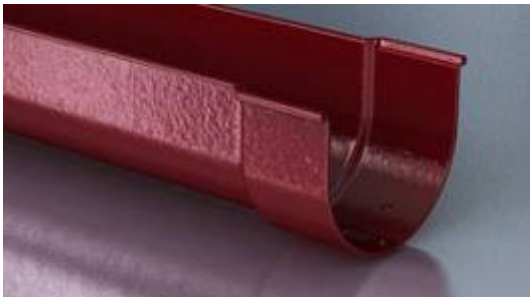

Beaded Deep Run
113x75mm (4.5x3")



Victorian Ogee
100mm (4"), 113mm (4.5"), 125mm (5")

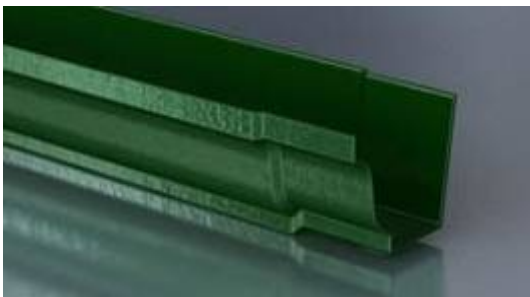

Moulded
100x75mm (4x3"), 125x100mm (5x4"), 150x100mm (6x4")


Product Datasheet

Aluminium Gutter Systems


Ref: PD001RW

Aqualine Extruded Aluminium Gutters


A range of aluminium gutter profiles with secret fix bracketry and all weather 'dry' jointing, with full provision for thermal movement. Aqualine provides a smooth, clean external appearance, with a uniform cross section along the whole length of the gutter.

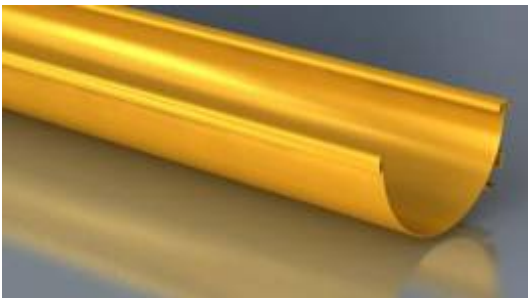

Half Round
100x50mm, 120x60mm, 150x75mm

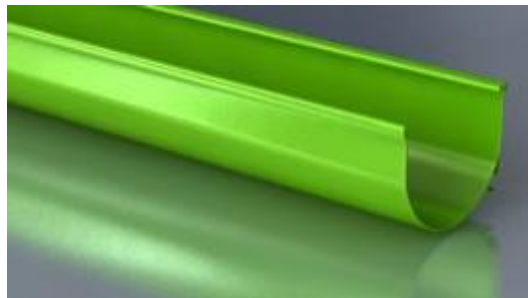


Deep Run
110x85mm

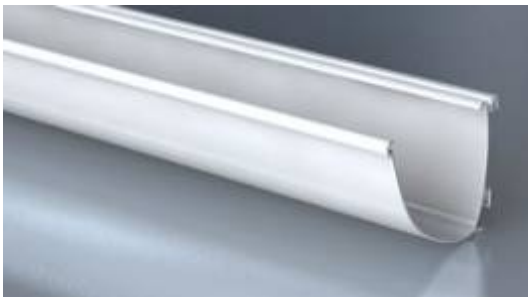

Modern
110x85, 150x120mm



Box
120x80, 140x100, 160x100mm

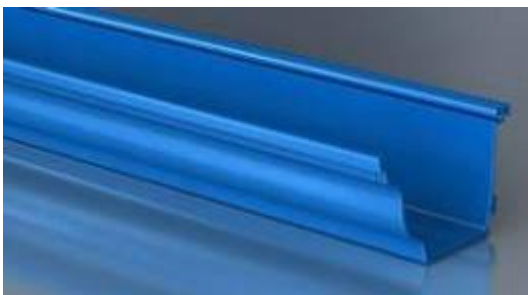

Moulded
140x100, 160x100mm


Product Datasheet

Aluminium Gutter Systems

Ref: PD001RW

GX Pressed Aluminium Gutters

A robust and fully engineered box section gutter range designed for traditional wet jointing on site. GX is offered in three profiles in a choice of sizes and is especially suited to applications where maximum capacity gutters are required.

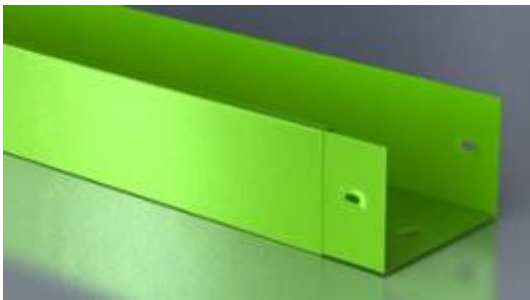

GX Joggle
102x76, 127x102, 152x102, 152x152, 204x152mm



GX Smooth
121x75, 140x98, 170x125, 176x150, 224x150mm



GX Moulded
113x76, 139x102, 162x102, 175x152, 207x152mm

General

Colour Options

Alumasc aluminium rainwater products are supplied in plain (mill) finish or in a range of factory applied polyester powder coatings. The standard range comprises the 16 colours.

Other colours with a BS or RAL number can be supplied to special order.

Polyester powder coating is in accordance with BS 6496:1984 and is approved by British Board of Agrément Certificate No. 86/1671.



Product Datasheet

Aluminium Gutter Systems

Ref: PD001RW

General

Quality

Alumasc operates a quality assurance management system which is independently audited to BS EN ISO 9001:2000.

Environmental

Alumasc's manufacturing site at St Helens is audited by Underwriters Laboratories to the ISO 14001:2004 Environmental Management Standard. Similar accreditation is currently being completed for the entire business at Alumasc's Burton Latimer site.

Approvals

Standard products are approved by British Board of Agrément Certificate No. 86/1671

Manufacture

Alumasc aluminium gutter systems are produced at the Alumasc works at Burton Latimer, Northamptonshire, UK.

Heritage Cast Aluminium	Made from commercial LM2 and LM6 grades of aluminium alloy to BS EN 1559:1997, BS EN 1676: 1997 and BS EN 1706: 1998, nominal thickness 4mm.
Aqualine Extruded Aluminium	Based on aluminium extrusions to BS 1474: 1972, material 6063, T6. The various elements interlock, snap or slide in juxtaposition with each other, together with EPDM seals at the joints.
GX Pressed Aluminium	Gutter lengths, fittings and unions are pressed from various thicknesses of sheet aluminium (as based on BS EN 1462:1997, BS EN 612:1996 to BS EN 515:1993, BS EN 573:1995 and BS EN 485).

Durability

Aluminium gutter systems have a low maintenance life in excess of 40 years in rural and suburban conditions, and in excess of 25 years in industrial and marine conditions.

Compatibility

Direct aluminium contact with dissimilar metals or with materials containing lime or cement should be avoided. The polyester coating is an insulation but a liberal coating of bitumen will be an additional safety factor. The use of aluminium in conjunction with copper roofs, cladding or flashings should be avoided. Contact Alumasc Technical Services for advice where heavily polluted atmospheres or marine conditions are involved for advice on material choice.

Fire Rating

Non-combustible to BS 476, Part 4: 1970 (1984). Melting temperature for aluminium is approximately 660°C.

Product Datasheet

Aluminium Gutter Systems

Ref: PD001RW

General

Lightning Conductivity

The need for a lightning protection system is a decision to be made between the architect, the builder and the lightning protection engineer. This should be based on the risk factor as calculated in BS 6651:1999. When such a system is chosen for a building all metal gutters should be cross bonded into it. Both economy and practicality indicate that the eaves gutter can be used in place of an eaves conductor tape by use of the Alumasc Lightning Link.

Health, Safety & Environmental

Material Safety (COSHH) and Environmental Data Sheets can be downloaded from www.alumascrainwater.co.uk

Maintenance - Routine Inspection

- Regularly clean out rainwater heads and gutters and ensure that downpipes are clear at all times.
- Check that joints and fixings are secure by periodic inspection, not less than twice a year, and preferably at the beginning of Autumn and again at the end of Winter.
- Brush down unpainted surfaces lightly to inspect if required.
- Plain finish goods will develop a natural grey aluminium oxide coating which forms a hard protective layer, preventing additional oxidization.
- Even with a well fixed installation, ladders should not be rested against the gutters.
- Clean polyester coated surfaces by regularly washing down with a warm detergent solution, and maintain paintwork in good condition. Do not clean with caustic or abrasive materials. In aggressive atmospheres such as marine environments and industrial areas BS 6496:1984 requires this cleaning to be carried out at up to three month intervals to maintain optimum appearance and durability.
- Lightning linkage fixings should be tested regularly in accordance with the specialist electrical maintenance instructions.

Technical Support

Technical advice is available from Alumasc Technical Services via:

Telephone	+44 (0)1744 648400
Facsimile	+44 (0)1744 648401
Email	technical@alumasc-exteriors.co.uk

Alumasc Exterior Building Products Ltd pursues a policy of constant product development and information contained within this datasheet is therefore subject to change without notice. The customer is responsible for ensuring that each product is fit for its intended purpose and that the conditions for use are suitable. All quoted data is nominal and subject to production tolerances.