**Document:** Remediation Verification Report

Project: Needham Market Quarry

Reference No.: GN17820\_RV20

Date: November 2020

Prepared for: Hopkins Homes Limited



# harrisongeotechnical ENGINEERING



# HARRISON GROUP ENVIRONMENTAL LIMITED

- Document: Remediation Verification Report
- Project: Needham Market Quarry
- Reference No.: GN17820\_RV20
- Date: November 2020
- Prepared For: Hopkins Homes Limited

#### **REPORT STATUS:**

Revision	Comments	Prepared By	Approved By	Issued By	Audited By
0	first issue	INIT DM Sign D.Moody	Init MR Sign	Init MR Sign	INIT JA Sign
		Comments Date 28/10/20	Comments Date 03/11/20	Comments Date 09/11/20	Comments Date 09/11/20
		Init Sign	Init Sign	Init Sign	Init Sign
		Comments Date	COMMENTS DATE	COMMENTS DATE	Comments Date
		Init Sign	Init Sign	Init Sign	Init Sign
		COMMENTS DATE	Comments Date	COMMENTS DATE	Comments Date
		INIT SIGN	Init Sign	Init Sign	Init Sign
		Comments Date	Comments Date	Comments Date	Comments Date

## CONTENTS

FOREWORD
----------

Photo sheet

1 TERMS OF REFERENCE & INTRODUCTION	1
2 BACKGROUND INFORMATION	1
2.1 Verification Report Structure	1
2.2 Site Setting, History and Investigation	1
3 SOIL REMEDIATION	2
3.1 Cover System Material	3
3.1.1 Site Won Subsoil	3
3.1.2 Imported Topsoil	3
4 CONCLUSIONS	3
APPENDICES – Supporting Documentation	
Remediation Plans and Drawings	
Trial Pit Logs	
Soil Chemical Analysis Reports	

## FOREWORD

#### General Conditions Relating To a Verification Report

This investigation has been devised to generally comply with the relevant principles and requirements of B.S.10175:2011+A2:2017 'Investigation of potentially contaminated sites - Code of practice', science report SC050021/SR3 'Updated Technical Background to the CLEA Model' (Environment Agency, 2008), and DEFRA/Environment Agency (EA), 2019 'land contamination: risk management'. The recommendations made and opinions expressed in this report are based on the information obtained from the sources described using a methodology intended to provide reasonable consistency and robustness.

The opinions expressed in this report are based on the ground conditions revealed by the site works, together with an assessment of the site and of laboratory test results. Whilst opinions may be expressed relating to sub-soil conditions in parts of the site not investigated, for example between exploratory positions, these are only for guidance and no liability can be accepted for their accuracy.

Boring and sampling procedures are undertaken in accordance with B.S.5930:2015+A1:2020 'Code of Practice for Ground Investigations'. Likewise, in-situ and laboratory testing complies with B.S.1377:1990 'Methods of Tests for Soils for Civil Engineering Purposes' and B.S.22475:2011, unless stated otherwise in the text. Chemical testing has been undertaken by a UKAS accredited laboratory.

Some items of the investigation have been provided by third parties and whilst Harrison Group have no reason to doubt the accuracy, the items relied on have not been verified. No responsibility can be accepted for errors within third party items presented in this report.

This report is produced in accordance with the scope of Harrison Group's appointment and is subject to the terms of appointment. Harrison Group accepts no liability for any use of this document other than by its client and only for the purposes, for which it was designed and produced. No responsibility can be accepted for any consequences of this information being passed to a third party who may act upon its contents/recommendations.

Any advice, opinions, or recommendations within this document should be read and relied upon only in the context of the document as a whole. The contents of this document are not to be construed as providing legal, business or tax advice or opinion.

## **VERIFICATION REPORT**

#### FOR REMEDIAL ACTIVITY

## AT

## NEEDHAM MARKET QUARRY

#### 1 TERMS OF REFERENCE & INTRODUCTION

The work covered by this document was undertaken on behalf of Hopkins Homes Ltd, in accordance with an emailed instruction to proceed from Hopkins Homes Ltd dated 3<sup>th</sup> October 2018.

The work described in this report represents validation and verification of remediation comprising a suitable soil cover system (600mm of combined subsoil and topsoil, with a minimum thickness of topsoil to be 150mm) to the back and front garden of plot 25 and a fenced side garden and an area of soft landscaping around plot 26. A remediation method statement (RMS) for the site was compiled and provided for the client to submit to the regulatory authorities in December 2017. The RMS (reference GN17820\_RMS1) detailed the method of remediation to be undertaken, based on the ground investigations and assessment previously completed. We believe that the RMS was issued to Mid Suffolk District Council and the NHBC for their review and comment on the planned remediation.

The plots which require validation of the suitability of the soils in gardens and soft landscaping can be identified in drawing GN17820\_DR402 (appended to this VR), which highlights the development phasing plan (phases 1A, 1B, 2 and 3). Specifically, plots which require confirmation of the suitability of the near-surface soils, and the need for a soil cover, includes plot numbers 1-136, 161-170, 184-193, 197-211, 218-266 and soft landscaping areas in these development phases.

Subsequent remediation verification reports are in production for additional affected plots/areas, as each area is remediated.

#### 2 BACKGROUND INFORMATION

#### 2.1 Verification Report Structure

This document has been set out as follows:

- A brief background of the site, the findings of previous investigations and nature of the remediation planned.
- A description of the activities undertaken.
- Details of soil sampling undertaken to date.
- Concluding with an assessment of the suitability for reuse.

Appended to this document is supporting evidence as follows:

• Chemical analysis of the material used within the cover system (topsoil and subsoil).

#### 2.2 Site Setting, History and Investigation

Harrison Group Environmental Limited (HGE) provided ground investigation for Hopkins Homes (HH) under the direction of Coffey Geotechnics Limited (CG) as part of their interpretative report on contamination and geotechnical aspects of the former chalk quarry, which was completed to provide HH with information for their development prior to acquiring the site. Reference should be made to CG report (reference 02095AA\_R\_003A-InterpReport v6, dated 23<sup>rd</sup> May 2014). Part of CG recommendations were for ground improvement in parts of the site, where deep fill material was placed as part of quarrying activity, and for two zones to require ground gas protection measures.

HGE were contacted by HH in 2017 to assess the ground gas regime during and after earthworks, and to assess the exposure of made ground soils by their earthworks contractor (Breheny Civil Engineering) when

they removed approximately 2m thickness of surcharge toward the conclusion of ground improvement. We were also asked to consider the suitability of topsoil and subsoil stockpiled by Breheny Civil Engineering (BCE) as part of earthworks for reuse within the development.

The HGE report on the ground gas regime (reference GN17820\_SI\_GGrev1, dated November 2017) should be referred to for the details. In summary, the concentrations of ground gases were not found to significantly differ during or after earthworks. The two zones requiring protection measures to CS2 in accordance with BS8485 were refined to specifically include plots 109-111, 116 and 121-126 in zone 1 and plots 1, 230, 234-239, 240-249, 251-256, 265 and 266 in zone 2. Drawing GN17820\_DR104 (appended to the RMS document) identifies the two zones referred to and the plots affected.

HGE report on the suitability of identified soil for use within the residential development (GN17820\_SI\_Soilrev1, also dated November 2017) should be referred to for details. Based on the available ground investigation information the quarry backfill material was generally found to comprise reworked glacial drift and structureless chalk but was also noted to include some organic soils with low levels of PAH compounds in some soil samples analysed. It was considered likely that where the darker organic/ashy material was encountered it may potentially be unsuitable to remain where exposed in the near surface of domestic gardens. These areas approximately correspond to development phases 1B and 2, but may extend to areas within phase 3. It was recommended that where unsuitable material is exposed or is present within the near surface of domestic gardens and soft landscaping areas, that a suitable soil cover system is implemented. In order to determine the affected gardens and soft landscaping areas, it was proposed that HGE undertake shallow trial pit excavations.

A stockpile of topsoil (S02) was imported from Hopkins Homes' Bramford site during the summer of 2018. The topsoil was considered physically suitable for reuse in gardens with chemical analysis of this material confirming its chemical suitability. There was a minimal amount of anthropogenic content to the stockpiled topsoil, which was inert and does not present a significant risk to end users, but may be physically undesirable. It was recommended that this undesirable content is removed from topsoil planned for use in gardens and areas of public open space, where observed during moving and placing the topsoil.

A remediation method statement (RMS) for the site was compiled following completion of the site investigation works and submitted to the regulatory authorities in December 2017 (reference GN17820\_RMS1). The method for ensuring soil suitability is detailed in sections 4, 5 and 6 of the RMS. Section 3 within the RMS document details the need for gas protection measures. HH have confirmed that gas protection measures are being installed where required and verification of these works is being undertaken by others.

The plots which require validation of the suitability of the soils in gardens and soft landscaping can be identified in drawing GN17820\_DR402 (appended to this VR), which highlights the development phasing plan (phases 1A, 1B, 2 and 3). Specifically, plots which require investigation before the suitability of the near-surface soils (and the need for a soil cover) can be confirmed includes plot numbers 1-136, 161-170, 184-193, 197-211, 218-266 and soft landscaping areas in these development phases.

## 3 SOIL REMEDIATION

As described above, the verification process was to comprise confirmation that there is sufficient thickness of suitable cover soil within the garden areas of plots 1-136, 161-170, 184-193, 197-211, 218-266 and soft landscaping areas in these development phases, as indicated on drawing GN17820\_DR402 within the appendix. The work described in this report represents validation and verification of remediation comprising a suitable soil cover system (subsoil and topsoil) to the back and front garden of plots 25 and a fenced side garden and an area of soft landscaping around plot 26.

An engineer from HGE visited site on 15/10/20 to undertake hand dug trial pits to confirm that suitable topsoil and subsoil was present.

During the visits, a number of observations were made:

- A partial brick was present at 0.45m within HDTP26-01. This was removed prior to backfilling.
- Concrete gravel was encountered within the subsoil in HDTP26-02, effort was made to remove this material before backfilling.

The following sections of this report outline the remediation completed for plots 25 and 26.

## 3.1 Cover System Material

The material used for the cover system included site won subsoil and imported topsoil (from previously verified stockpile S02 as mentioned in section 2.2 of this report).

The fieldwork locations are shown on drawing GN17820-DR502aa included within the appendix. The trial pits were undertaken to record the thickness and physical descriptions of the materials present and to confirm material suitability.

#### 3.1.1 Site Won Subsoil

The material was generally described as a combination of:

- Made Ground (reworked chalk) light brown gravelly sandy silt. Gravel is sub-angular to sub-rounded fine to coarse chalk and flint with rare brick in places.
- Made Ground Soft to firm light brown gravelly sandy clay. Gravel is sub-angular to sub-rounded fine to coarse flint, chalk, with brick and concrete in places.
- Orangish brown gravelly silty fine to coarse sand. Gravel is subangular to sub-rounded fine to coarse flint and chalk.

The materials encountered were considered satisfactory for use as subsoil from visual inspection. The dark material identified elsewhere on site that contained low levels of contaminants was not encountered in plots 25 and 26.

#### 3.1.2 Imported Topsoil

Topsoil from stockpile S02 (imported from Hopkins Homes' Bramford Site) was previously considered suitable for reuse in gardens and chemical analysis of this material has confirmed its chemical suitability. The results of the chemical analysis are appended to this report. The material was previously deemed physically suitable for use as a topsoil, as the soil appeared to be an appropriate consistency for use in garden areas. The material within S02 was described as dark brown slightly gravelly slightly silty sand with fine to medium subangular to subrounded flint. A total of ten samples were submitted to a laboratory in May 2019 for testing of a general suite of contaminants and an asbestos screen. No asbestos was detected, and the levels of all other contaminants were below the screening criteria adopted at the time.

During the verification works, the material was described as dark brown slightly gravelly slightly silty fine to medium sand. Gravel is sub-angular to subrounded fine to medium flint with rare brick in places. This recent description is consistent with the previous description, allowing for some variability, and therefore has been confirmed as the same material.

This material was used for the topsoil (ground level up to 330mm depth) within all of the pits excavated in plots 25 and 26. The minimum thickness of 150mm of topsoil was encountered in all of the trial pits during the verification exercise.

#### 4 CONCLUSIONS

Harrison Group Environmental Limited considers that a suitable cover system of suitable thickness, comprising chemically and physically suitable material, has been implemented. We are satisfied that there will be no significant risk to human health from residual contamination in plots 25 and 26 at the development known as Needham Market Quarry.

This report should be submitted to the regulators in order to conclude the remediation process.

Plots 161-170, 218-266 have previously been validated. The requirement for remediation in other plots is currently being assessed and the remediation undertaken as appropriate. Further remediation verification reports are in production for additional affected plots/areas on the whole development, as each area is built and remediated. These include plots 1-136, 184-193 and 197-211 and soft landscaping areas in these development phases.

Report by:

17


Daniel Moody BSc (Hons.) MSc FGS Graduate Geotechnical Engineer Checked and approved by:


While

Mark Rivett BSc (Hons.) FGS Senior Geoenvironmental Engineer

## **APPENDICES – Supporting Documentation**

Drawings:	GN17820-DR402
	GN17820-DR502aa
Hand Dug Trial Pit Logs	HDTP25-1 to HDTP25-4
	HDTP26-1 to HDTP26-2
Chemical Analysis Reports:	19-41738-1
Photo Sheet:	GN17820_RV20 Photo Sheet 1

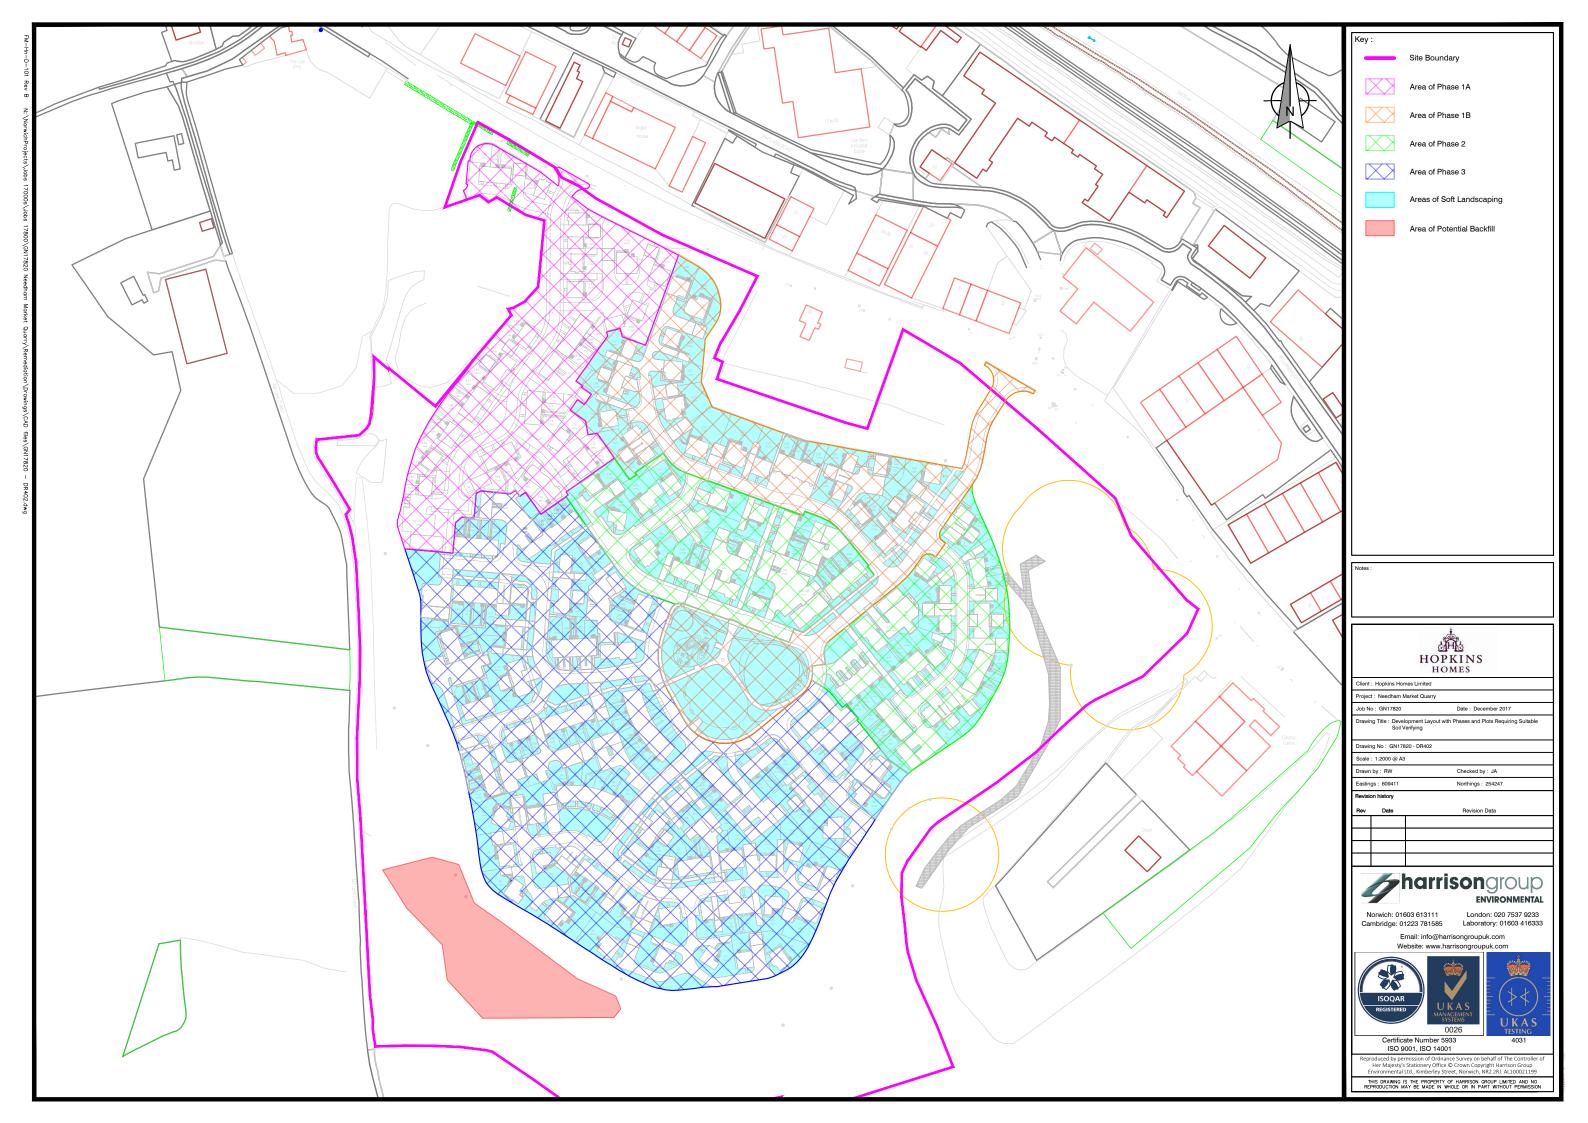

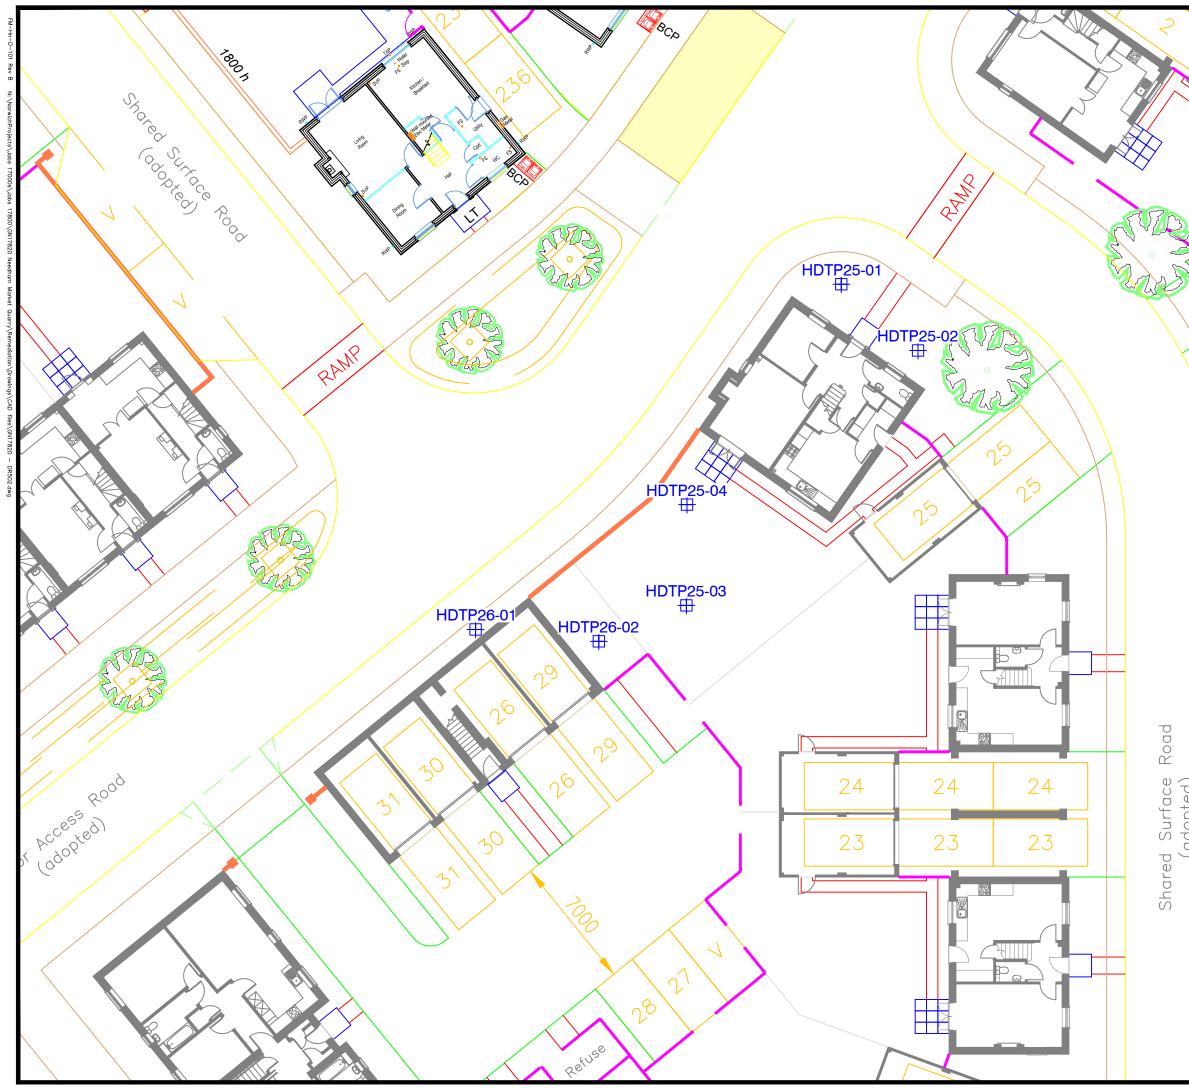

		Key :
		HDTP25-01 Hand Dug Trial Pit
		Trand Dug Indi Fit
	V N V	
	×	
$\wedge$		
2		
$\mathbf{N}$	5	
S.		
\ .		
< .		
$\backslash \Lambda$		
XL		
/   [		
$\setminus \setminus  $		
$\langle \rangle$		
$\langle \rangle$		
\ \	88	
· \ '		
\		
-		
	88	
	00	
		Notes :
	L T m	
	Li Li	
		\$
		. C.S.P.
		國門检
		HOPKINS
		HOMES
		Client : Hopkins Homes Ltd
		Project : Needham Market Quarry
	Λ	Job No : GN17820 Date : October 2020
	4	Drawing Title : Fieldwork Location Plan - Plots 25 - 26
		Device Net ON/2000 DDCC
		Drawing No : GN17820 - DR502aa
	1	Scale : 1:200 @ A3
		Drawn by : RW Checked by : MR
		Eastings : 609580 Northings : 254120
		Revision history
o`		
Ũ		Rev Date Revision Data
ٽ م		
0		
0	Q	
(adopted		
σ		
_		
		harrisongroup
		ENVIRONMENTAL
		Norwich: 01603 613111 London: 020 7537 9233
		Cambridge: 01223 781585 Laboratory: 01603 416333
		Email: info@harrisongroupuk.com
		Website: www.harrisongroupuk.com
	-	
		MANAGEMENT SYSTEMS UKAS
		0026 TESTING
		Certificate Number 5933 4031
		ISO 9001, ISO 14001
		Reproduced by permission of Ordnance Survey on behalf of The Controller of Her Majesty's Stationery Office © Crown Copyright Harrison Group Environmental Ltd., Kimberley Street, Norwich, NR2 2RJ. AL100021199
		Environmental Ltd., Kimberley Street, Norwich, NR2 2RJ. AL100021199
		THIS DRAWING IS THE PROPERTY OF HARRISON GROUP LIMITED AND NO REPRODUCTION MAY BE MADE IN WHOLE OR IN PART WITHOUT PERMISSION
		CONTRACTOR AND A MORE ON IN PART MINUT PERMISSION

harrisongrou		Tria	Pit l	Reco		HDTP25	-1	Sheet 1 of 2	1	
Project ID: GN17820	Client:	Hopk	ins Homes	E: 609592.11	N:	254137.65				
Location: Needham Market Quarry	Consul	tant:								
	Plant u	sed: Hand	Excavated				Date: 15/10	/2020		
			Enderacea	Elevation			ble / In-Situ Test Informat		Installati	on &
Geology Description		Legend	Depth	(maOD)	Туре	Depth	Results / Re		Backf	ill
TOPSOIL. Dark brown slightly gravelly slightly silty medium SAND. Gravel is sub-angular to sub-round medium flint.			 - - -	-	-	Deptin				
At 0.20m: Gravel of sub-angular fine brick present	:			t	-					X
Light orangish brown sandy gravelly SILT. Gravel is soub-rounded fine to coarse flint and chalk.	sub-angular to		0.25	+ + + + + +	-					
Trial pit terminated at 0.60m.		××××	0.60	ł	-					
Weather: Dry and cloudy	D-1		e Chuilter ( )		Water Stri		Standing Law 1( )		Downey	
Pit Stability: Stable	Date	Wate	r Strike (m)	Time	Elapsed (m	nins)	Standing Level (m)	No g	Remarks roundwater encounte	red
Shoring Used:										
	Om arisings. rdinates.			ecked bv:				m-Hn-R-3069-Rev		

harrisongro		٦	<b>Fria</b> l	Pit l	Reco	rd		HDTP25-	• <b>2</b> s	heet 1 of 1
Project ID: GN17820	Clie	ent:	Hopki	ins Homes	Limited			E: 609596.17	N:	254134.14
Location: Needham Market Quarry	Cor	nsultant:								
	Plant used: Hand Excavated Date: 15/10/2020									
					Elevation		Sam	nple / In-Situ Test Informatio		Installation &
Geology Description		Le	egend	Depth	(maOD)	Туре	Depth			Backfill
TOPSOIL. Dark brown slightly gravelly slightly silt medium SAND. Gravel is sub-angular to sub-rour medium flint.					+		-			
Light orangish brown sandy gravelly SILT. Gravel i sub-rounded fine to coarse flint and chalk.	is sub-angular	to * *	(	0.20	+ + +		-			
At 0.40m: Gravel of angular medium brick prese Orangish brown gravelly silty fine to coarse SANI	D. Gravel is sub	)- X X X X X X X	× × × ( <u>× ×</u> × ×	0.45	+		-			
angular to sub-rounded fine to coarse flint and c	halk.	、	<,		-		-			
Trial pit terminated at 0.60m.				0.60	I		[			
Weather: Dry and cloudy						Water	Strike	I		
Pit Stability: Stable	Date		Wate	r Strike (m)	Tim	e Elapseo	d (mins)	Standing Level (m)		Remarks water encountered
Shoring Used:									<u> </u>	
Norwich Office: 01603 613111 London Office: 020 7537 9233 Cambridge Office: 01223 781585 Colchester Office: 01206 986675 Testing Services: 01603 416333 E-mail: info@harrisongroupuk.com	Remarks 1. Backfill: GL to 2. Approximate	coordinate					av: MP	·	Ena 11-	a P 2060 Perry F
Website: www.harrisongroupuk.com	Logged by:	: DM			Cł	necked l	by: MR		Fm-Hr	n-R-3069-Rev E

harrisongro			Tria	Pit I	Reco	rd		HDTP25-	.3	Sheet 1 of 1	
Project ID: GN17820		Client: Hopkins Homes Limited E: 60958							N:	254120.66	
Location: Needham Market Quarry		Consultant:								_	
	F	Plant use	d: Hand	Excavated				Date: 15/10	/2020		_
					Elevation		Sam	ple / In-Situ Test Informati		Installation	&
Geology Description			Legend	Depth	(maOD)	Туре	Depth			Backfill	
TOPSOIL. Dark brown slightly gravelly slightly silt medium SAND. Gravel is sub-angular to sub-roun medium flint. MADE GROUND. Soft to firm light brown sandy g Gravel is sub-angular to sub-rounded fine to coar chalk with rare angular to sub-angular fine to me	ravelly CLA	Y. d		0.25	-		-				
Trial pit terminated at 0.60m.				0.60	-		-				Ľ
Weather:     Dry and cloudy       Pit Stability:     Stable	Da	ate	Wate	r Strike (m)	Time	Water S Elapsed		Standing Level (m)		Remarks	_
	50		- Wate						No grou	ndwater encountered	Ŀ
Shoring Used:	Romarka										
Norwich Office: 01603 613111	Remarks 1. Backfill: G 2. Approxim	iL to 0.60m					ov: MR			-Hn-R-3069-Rev E	

harrisongrou		Trial	Pit F	Recoi	HDTP25-	- <b>4</b> sh	eet 1 of 1	
Project ID: GN17820	Clie	ent: Hopki	ns Homes I	Limited		E: 609583.95	N:	254125.99
Location: Needham Market Quarry	Сог	nsultant:						
	Pla	nt used: Hand	Excavated			Date: 15/10	/2020	
				Elevation	Sar	nple / In-Situ Test Informati		Installation &
Geology Description		Legend	Depth	(maOD)	Type Dept	-		Backfill
TOPSOIL. Dark brown slightly gravelly slightly silty fi medium SAND. Gravel is sub-angular to sub-rounde medium flint.	ed fine to		0.30					
Orangish brown gravelly silty fine to coarse SAND. G angular to sub-rounded fine to coarse flint and chal			-	-	-			
Trial pit terminated at 0.60m.			0.60		-			
Weather: Dry and cloudy		I			Water Strike			
Pit Stability: Stable	Date	Water	Strike (m)	Time	Elapsed (mins)	Standing Level (m)		marks ater encountered
Shoring Used:								
Norwich Office: 01603 613111 London Office: 020 7537 9233 Cambridge Office: 01223 781585 Colchester Office: 01206 986675 Testing Services: 01603 416333 E-mail: info@harrisongroupuk.com	emarks Backfill: GL to Approximate				ecked by: MR			R-3069-Rev E

Geology Description         Learner         Capital (match)         East (match)         Capital (match)         East	harrisongro			Trial	Pit I	Reco	ord		HDTP2	6-1	Sheet	t 1 of 1
Induce         Induce<	Project ID: GN17820		Client:	Hopki	ns Homes	Limited			E: 609572.7	6 N:	: 254	119.39
Geology Description         Lagred         Depth         Tennity         Lagred         Depth         Tennity         Lagred         Lagred <thlagred< th=""> <thlagred< th=""> <thlagred< th="">         &lt;</thlagred<></thlagred<></thlagred<>	Location: Needham Market Quarry		Consultant:									
Geology Description         Learner         Capital (match)         East (match)         Capital (match)         East		F	Plant used:	Hand	Excavated				Date: 15	/10/2020	)	
Description       Date       Control Control Type       Description       Type       Description		I						Sam	I Iple / In-Situ Test Inforr	nation	1	nstallation & Backfill
medium SAND. Gravel is sub-angular to sub-rounded fine to medium fine.       0.40       0.40         MADE GROUND. Soft to firm light brown sandy gravely CLAX. Gravel is sub-angular to sub-rounded fine to many firm regular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases of the sub-rounded in the cases firm and data with mergular to sub-rounded in the cases of the sub-rounded in the cases firm and data with mergular to sub-rounded in the cases of the sub-rounded in the cases firm and data with mergular to sub-rounded in the cases of the sub-rounded in the cases firm and data with mergular to sub-rounded in the cases of the sub-rounded in the cases firm and data with mergular to sub-rounded in the cases of the sub-rounded in the cases firm and data with mergular to sub-rounded in the cases of the sub-rounded in the cases firm and data with mergular to sub-rounded in the cases of the sub-rounded in the cases firm and data with mergular to sub-rounded in the cases of the sub-rounded in the cases firm and data with mergular to sub-rounded in the cases of the sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases firm and data with mergular to sub-rounded in the cases f	Geology Description		l	_egend	Depth	(maOD)		Depth	n Results	/ Remarks		васкпії
MADE GROUND. Soft to might brown sandy gravely CLA. Gravel is ub-angular to sub-angular fue to medium brick. At D.45m: Gravel d graguicr cost-angular fue to medium brick. At D.45m: Gravel d graguicr cost-angular fue to medium brick. At D.45m: Gravel d graguicr cost-angular fue to medium brick. At D.45m: Gravel d graguicr cost-angular fue to medium brick. Trial pit terminated at 0.60m. Under the sub-angular fue to medium brick. Weather: Dry and cloudy Weather: Dry and cloudy Weather: Stable I Stability: Stable I Stability: Stable I Stability: Stable I Machile Cto Grave angular fue to Grave angular	medium SAND. Gravel is sub-angular to sub-rour medium flint.	nded fine to			0.40	- - - - - - - -		-				
Weather:       Dy and cloudy       Image: spaning biogram biogrambiogram biogram biogrambiogram biogram biogr	Gravel is sub-angular to sub-rounded fine to coa chalk with rare angular to sub-angular fine to me At 0.45m: Gravel of angular coarse brick present	rse flint and edium brick	d 🛞		-	+		-				
Pit Stability:     Stable     Date     Water Strike (m)     Time Elapsed (mins)     Standing Level (m)     Remarks       Shoring Used:     No groundwater encourd       Pit Dimensions:     L: 0.40m x W: 0.40m     Remarks       Norwich Office:     01603 613111 London Office:     1. Backfill: GL to 0.60m arisings. 2. Approximate coordinates.     2. Approximate coordinates.	Trial pit terminated at 0.60m.											
Shoring Used:     No groundwater encour       Pit Dimensions:     L: 0.40m x W: 0.40m       Remarks       Norwich Office:     01603 613111       London Office:     020 7537 9233       2. Approximate coordinates.				\A/ata	Strike (m)				Standing Loval /~		Domor	
Pit Dimensions:     L: 0.40m x W: 0.40m     Remarks       Norwich Office:     01603 613111     1. Backfill: GL to 0.60m arisings.       London Office:     020 7537 9233     2. Approximate coordinates.	rit stability: Stable	Da	are	vvate	Suike (M)		пе старзес	a (minis)	Stanung Level (m)			
Norwich Office: 01603 6131111. Backfill: GL to 0.60m arisings.London Office: 020 7537 92332. Approximate coordinates.												
Colchester Office: 01206 986675         Testing Services: 01603 416333         E-mail: info@harrisongroupuk.com         Website: www.harrisongroupuk.com         Logged by: DM       Checked by: MR         Fm-Hn-R-3069-R	Norwich Office: 01603 613111 London Office: 020 7537 9233 Cambridge Office: 01223 781585 Colchester Office: 01206 986675 Testing Services: 01603 416333 E-mail: info@harrisongroupuk.com	1. Backfill: G 2. Approxim	GL to 0.60m ar nate coordinat									

harrisongrou		Trial	Pit R	leco	rd		HDTP26-	<b>2</b> s	heet 1 of 1
Project ID: GN17820	Clie	ent: Hopki	ins Homes L	imited			E: 609579.28	N:	254118.76
Location: Needham Market Quarry	Con	sultant:							
	Plar	nt used: Hand	Excavated			C	Date: 15/10	/2020	
				Elevation			e / In-Situ Test Informati		Installation &
Geology Description		Legend	Depth	(maOD)	Туре	Depth	Results / Re		Backfill
TOPSOIL. Dark brown slightly gravelly slightly silty fir medium SAND. Gravel is sub-angular to sub-rounder medium flint.	ed fine to		0.25		-				
MADE GROUND. Soft to firm light brown sandy grav Gravel is sub-angular to sub-rounded fine to coarse chalk with occasional sub-angular medium to coarse	flint and		+						
Trial pit terminated at 0.60m.			0.60 -		-				
Weather: Dry and cloudy	D-+-		r Strike /)	т:	Water Strik		Standing Love ()		
Pit Stability: Stable	Date	Wate	r Strike (m)	Time	Elapsed (mi	(15)	Standing Level (m)		Remarks water encountered
Shoring Used:									
Norwich Office: 01603 613111 London Office: 020 7537 9233 Cambridge Office: 01223 781585 Colchester Office: 01206 986675 Testing Services: 01603 416333 E-mail: info@harrisongroupuk.com	emarks Backfill: GL to Approximate o			CL	ecked by:	MP		Par. 11	n-R-3069-Rev E



Jamie Cushing Harrison Group Kimbeley Street Norwich NR2 2RJ



i2 Analytical Ltd. 7 Woodshots Meadow, Croxley Green Business Park, Watford, Herts, WD18 8YS

t: 01923 225404 f: 01923 237404 e: reception@i2analytical.com

t: 01603 613111 f: 01603 618120 e: jamiec@harrisongroupuk.com

## Analytical Report Number : 19-41738

Project / Site name:	Needham Market Quarry	Samples received on:	17/05/2019
Your job number:	GN17820	Samples instructed on:	17/05/2019
Your order number:	GN17820-33605-JC	Analysis completed by:	24/05/2019
Report Issue Number:	1	Report issued on:	24/05/2019
Samples Analysed:	10 soil samples		

Signed:

Zina Abdul Razzak Senior Quality Specialist **For & on behalf of i2 Analytical Ltd.** 

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils leachates waters asbestos	<ul> <li>4 weeks from reporting</li> <li>2 weeks from reporting</li> <li>2 weeks from reporting</li> <li>6 months from reporting</li> </ul>
Excel copies of reports are only valid when accompanied by this PDF certificate.		

Any assessments of compliance with specifications are based on actual analytical results with no contribution from uncertainty of measurement. Application of uncertainty of measurement would provide a range within which the true result lies. An estimate of measurement uncertainty can be provided on request.





Project / Site name: Needham Market Quarry Your Order No: GN17820-33605-JC

Lab Sample Number				1224213	1224214	1224215	1224216	1224217
Sample Reference		SO2-01	SO2-02	SO2-03	SO2-04	SO2-05		
Sample Number		1	1	1	1	1		
Depth (m)		0.00-0.50	0.00-0.50	0.00-0.50	0.00-0.50	0.00-0.50		
Date Sampled				15/05/2019	15/05/2019	15/05/2019	15/05/2019	15/05/2019
Time Taken				None Supplied				
			2					
		a –	Accreditation Status					
Analytical Parameter	Units	Limit of detection	tat ed					
(Soil Analysis)	ស	tion	us tati					
		-	9 N					
Stone Content	%	0.1	NONE	< 0.1	25	< 0.1	< 0.1	< 0.1
Moisture Content	%	N/A	NONE	8.8	7.6	8.8	8.7	9.4
Total mass of sample received	kg	0.001	NONE	0.47	0.50	0.48	0.49	0.49
	ky	0.001	NONE	0.17	0.50	0.10	0.15	0.15
Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	Not-detected	Not-detected	Not-detected	Not-detected
	1/15-							
General Inorganics								
pH - Automated	pH Units	N/A	MCERTS	8.1	8.1	9.0	7.9	7.8
Total Organic Carbon (TOC)	%	0.1	MCERTS	0.8	0.8	0.8	0.8	0.8
	•				•		•	•
Speciated PAHs								
Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluorene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Phenanthrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.64	< 0.05	< 0.05
Anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.87	< 0.05	< 0.05
Pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.83	< 0.05	< 0.05
Benzo(a)anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.46	< 0.05	< 0.05
Chrysene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.26	< 0.05	< 0.05
Benzo(b)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.26	< 0.05	< 0.05
Benzo(k)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.19	< 0.05	< 0.05
Benzo(a)pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.18	< 0.05	< 0.05
Indeno(1,2,3-cd)pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dibenz(a,h)anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Total PAH							1	1
Speciated Total EPA-16 PAHs	mg/kg	0.8	MCERTS	< 0.80	< 0.80	3.69	< 0.80	< 0.80
Heavy Metals / Metalloids			,					1
Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	5.2	10	14	7.2	6.5
Boron (water soluble)	mg/kg	0.2	MCERTS	1.2	1.3	1.0	1.2	1.1
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Chromium (hexavalent)	mg/kg	4	MCERTS	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	11	11	8.7	12	13
Copper (aqua regia extractable)	mg/kg	1	MCERTS	15	16	18	13	14
Lead (aqua regia extractable)	mg/kg	1	MCERTS	28	25	25	25	24
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	10	11	11	11	11
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	1.2
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	40	39	55	37	38





Project / Site name: Needham Market Quarry Your Order No: GN17820-33605-JC

Lab Sample Number			1224213	1224214	1224215	1224216	1224217	
Sample Reference	SO2-01	SO2-02	SO2-03	SO2-04	SO2-05			
Sample Number				1	1	1	1	1
Depth (m)				0.00-0.50	0.00-0.50	0.00-0.50	0.00-0.50	0.00-0.50
Date Sampled				15/05/2019	15/05/2019	15/05/2019	15/05/2019	15/05/2019
Time Taken				None Supplied				
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Monoaromatics & Oxygenates	•		•		•			
Benzene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

#### Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.001	MCERTS	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.001	MCERTS	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.001	MCERTS	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	< 8.0
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	< 8.0
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.001	MCERTS	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.001	MCERTS	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.001	MCERTS	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	15	14	13	< 10	< 10
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	19	18	19	< 10	< 10





Project / Site name: Needham Market Quarry Your Order No: GN17820-33605-JC

Lab Sample Number				1224218	1224219	1224220	1224221	1224222
Sample Reference	SO2-06	SO2-07	SO2-08	SO2-09	SO2-10			
Sample Number	1	1	1	1	1			
Depth (m)	0.00-0.50	0.00-0.50	0.00-0.50	0.00-0.50	0.00-0.50			
Date Sampled		15/05/2019	15/05/2019	15/05/2019	15/05/2019	15/05/2019		
Time Taken				None Supplied				
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Moisture Content	%	N/A	NONE	8.9	9.0	8.5	9.4	11
Total mass of sample received	kg	0.001	NONE	0.51	0.51	0.50	0.58	0.59
Asbestos in Soil	Туре	N/A	ISO 17025	Not-detected	Not-detected	Not-detected	Not-detected	Not-detected
General Inorganics DH - Automated Total Organic Carbon (TOC)	pH Units %	N/A 0.1	MCERTS MCERTS	7.7 0.9	7.8 0.7	8.0 0.7	7.5 0.9	7.8 0.8
Speciated PAHs				-				-
Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluorene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Phenanthrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(a)anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Chrysene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(b)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(k)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(a)pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Indeno(1,2,3-cd)pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dibenz(a,h)anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Total PAH Speciated Total EPA-16 PAHs	mg/kg	0.8	MCERTS	< 0.80	< 0.80	< 0.80	< 0.80	< 0.80
Heavy Metals / Metalloids Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	7.5	11	12	9.1	8.7
Boron (water soluble)	mg/kg	0.2	MCERTS	1.1	1.1	1.1	0.9	1.3
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Chromium (hexavalent)	mg/kg	4	MCERTS	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	11	14	9.2	11	13
Copper (aqua regia extractable)	mg/kg	1	MCERTS	13	14	15	11	12
Lead (aqua regia extractable)	mg/kg	1	MCERTS	24	23	22	24	23
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	0.6	0.5	< 0.3
Nickel (agua regia extractable)	mg/kg	1	MCERTS	10	11	11	10	11
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	37	35	31	35	37





Project / Site name: Needham Market Quarry Your Order No: GN17820-33605-JC

Lab Sample Number				1224218	1224219	1224220	1224221	1224222
Sample Reference		SO2-06	SO2-07	SO2-08	SO2-09	SO2-10		
Sample Number				1	1	1	1	1
Depth (m)				0.00-0.50	0.00-0.50	0.00-0.50	0.00-0.50	0.00-0.50
Date Sampled				15/05/2019	15/05/2019	15/05/2019	15/05/2019	15/05/2019
Time Taken				None Supplied				
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Monoaromatics & Oxygenates								
Benzene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

#### Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.001	MCERTS	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.001	MCERTS	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.001	MCERTS	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	< 8.0
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	< 8.0
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.001	MCERTS	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.001	MCERTS	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.001	MCERTS	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10	12	< 10	< 10





#### Project / Site name: Needham Market Quarry

\* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
1224213	SO2-01	1	0.00-0.50	Brown loam and sand with vegetation and gravel.
1224214	SO2-02	1	0.00-0.50	Brown loam and sand with gravel and stones.
1224215	SO2-03	1	0.00-0.50	Brown loam and sand with gravel.
1224216	SO2-04	1	0.00-0.50	Brown loam and sand with vegetation and gravel.
1224217	SO2-05	1	0.00-0.50	Brown loam and sand with vegetation and gravel.
1224218	SO2-06	1	0.00-0.50	Brown loam and sand with vegetation and gravel.
1224219	SO2-07	1	0.00-0.50	Brown loam and sand with vegetation and gravel.
1224220	SO2-08	1	0.00-0.50	Brown loam and sand with gravel.
1224221	SO2-09	1	0.00-0.50	Brown loam and sand with vegetation and gravel.
1224222	SO2-10	1	0.00-0.50	Brown loam and sand with gravel.





Project / Site name: Needham Market Quarry

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW) Process Water (PrW)


Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Boron, water soluble, in soil	Determination of water soluble boron in soil by hot water extract followed by ICP-OES.	In-house method based on Second Site Properties version 3	L038-PL	D	MCERTS
BTEX and MTBE in soil (Monoaromatics)	Determination of BTEX in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS
Hexavalent chromium in soil	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Moisture Content	Moisture content, determined gravimetrically.	In-house method based on BS1377 Part 2, 1990, Chemical and Electrochemical Tests	L019-UK/PL	W	NONE
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	D	MCERTS
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Total organic carbon (Automated) in soil	Determination of organic matter in soil by oxidising with potassium dichromate followed by titration with iron (II) sulphate.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests""	L009-PL	D	MCERTS
TPHCWG (Soil)	Determination of hexane extractable hydrocarbons in soil by GC-MS/GC-FID.	In-house method with silica gel split/clean up.	L088/76-PL	W	MCERTS

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom. For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland. Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

## <u>GN17820 – Needham Market Quarry</u> Verification Report 20 - Photo Sheet 1



**Photographs 1-4**, taken on the 15<sup>th</sup> October 2020 showing the general area of plot 25, along with the range of topsoil and subsoil encountered.

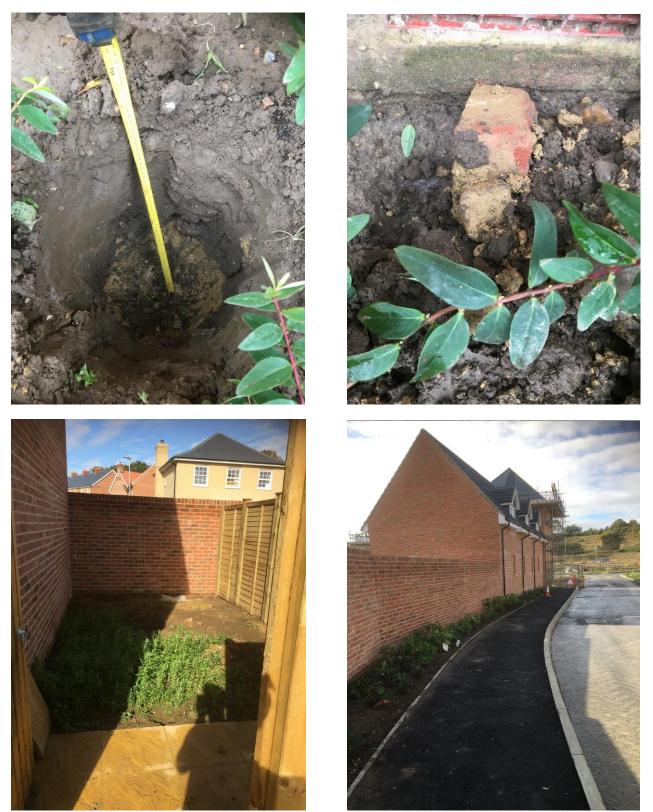

**Photographs 5 - 8**, taken on the 15<sup>th</sup> October 2020 showing the general area of plot 26, along with the range of topsoil and subsoil encountered.



Norwich (Registered Office)

Kimberley Street Norwich Norfolk NR2 2RJ

Tel: 01603 613111

London

12 Waterways Business Centre Navigation Drive South Ordnance Road Enfield, EN3 6JJ

Tel: 020 7537 9233

#### Cambridge

Future Business Centre Kings Hedges Road Cambridge CB4 2HY

Tel: 01223 781585

#### Colchester

Colchester Business Centre 1 George Williams Way Colchester CO1 2JS

Tel: 01206 986675