

BLOCK PLAN AS PROPOSED 1/500 @ A0

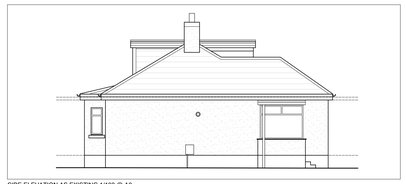

SIDE ELEVATION AS EXISTING 1/100 @ A0

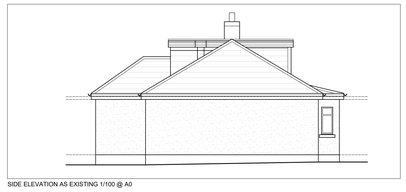

SIDE ELEVATION AS EXISTING 1/100 @ A0

REAR ELEVATION AS EXISTING 1/100 @ A0

FRONT ELEVATION AS EXISTING 1/100 @ A0

LOCATION PLAN AS EXISTING 1/1250 @ A0

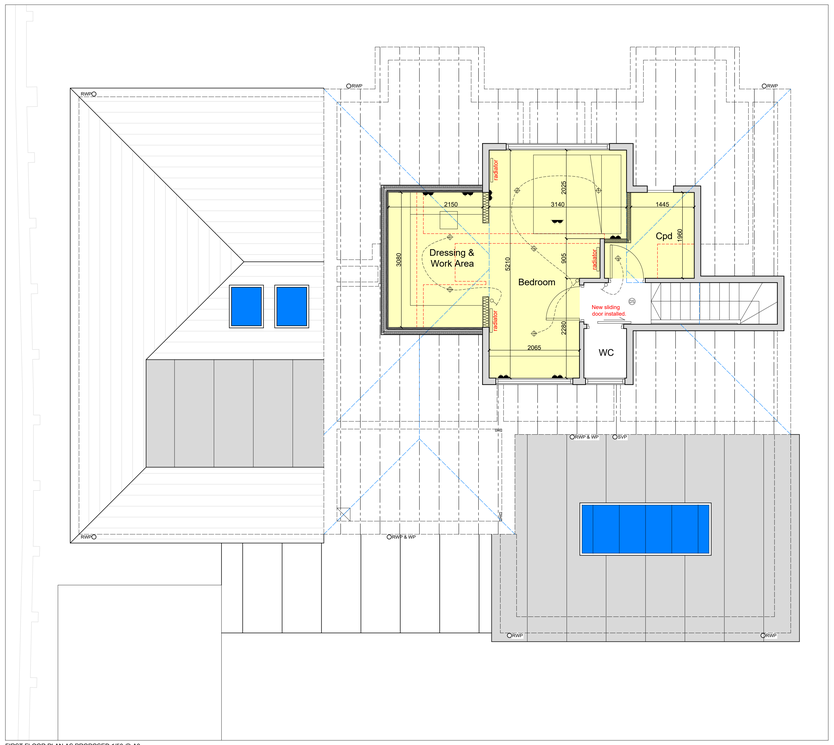

FIRST FLOOR PLAN AS PROPOSED 1/50 @ A0

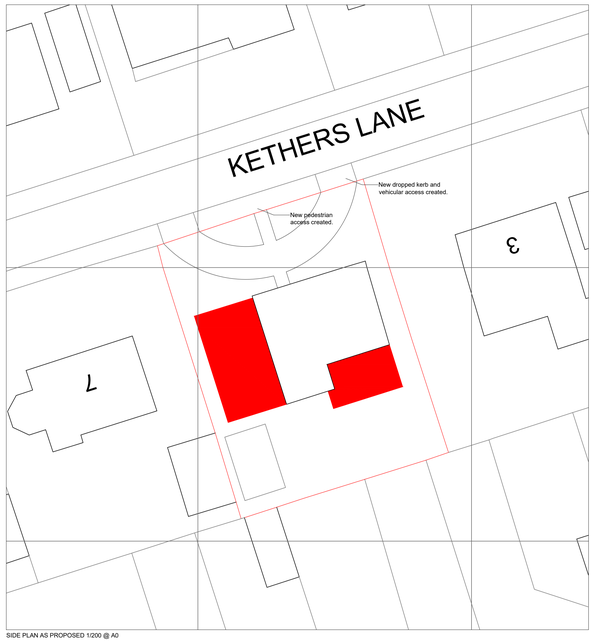

SIDE PLAN AS PROPOSED 1/200 @ A0

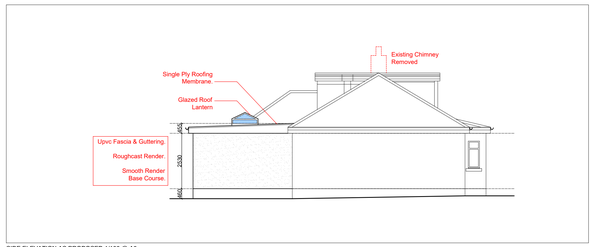

SIDE ELEVATION AS PROPOSED 1/100 @ A0

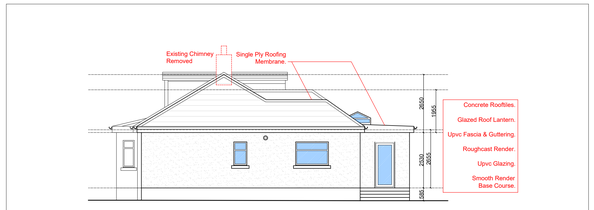

SIDE ELEVATION AS PROPOSED 1/100 @ A0

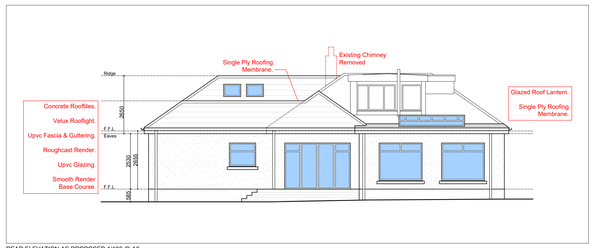

REAR ELEVATION AS PROPOSED 1/100 @ A0

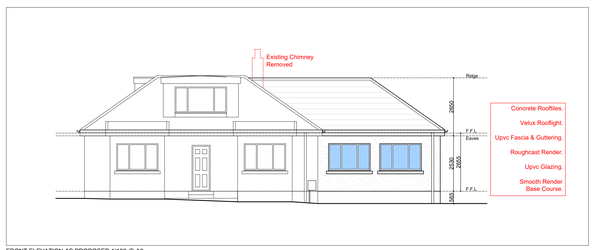

FRONT ELEVATION AS PROPOSED 1/100 @ A0



BLOCK PLAN AS EXISTING 1/500 @ A0

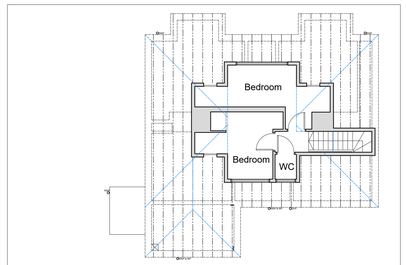

FIRST FLOOR PLAN AS EXISTING 1/100 @ A0

LOCATION PLAN AS EXISTING 1/1250 @ A0

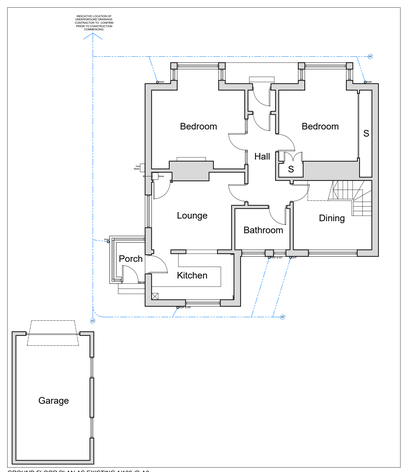

GROUND FLOOR PLAN AS EXISTING 1/100 @ A0

GROUND FLOOR PLAN AS PROPOSED 1:50 @ A0

Copyright of Bare Architecture. © All Rights Reserved.

Do not scale dimensions from this drawing all dimensions to be verified on site.

Any discrepancies in printed drawings to be brought to Bare Architecture's attention for clarification.

All variations to construction works carried out on site to be brought to our attention prior to carrying out work.

THIS DRAWING IS SOLELY FOR THE PURPOSES OF OBTAINING PLANNING PERMISSION AND BUILDING WARRANT APPROVAL. ADDITIONAL INFORMATION MAY BE REQUIRED FOR CONSTRUCTION PURPOSES. BARE ARCHITECTURE LTD ARE EXCEPTED FOR ANY OMISSION FROM THIS DRAWING SHOULD IT BE THE DRAWING BE USED FOR CONSTRUCTION PURPOSES.

The contractor will be held to have examined the site and checked all dimensions and levels before commencing construction work, and no claim will be entertained for errors that should have been detected. No dimensions should be scaled from this drawing.

ELECTRICAL LEGEND –

- PLATE SWITCH
- TWO-WAY PLATESWITCH
- FAN SWITCH
- UNSWITCHED POWER POINT
- TWIN SWITCHED POWER POINT
- CONNECTION UNIT
- BOILER POWER POINT
- PENDANT LIGHT
- SPLASHPROOF LUMINAIRE
- COOKER CONTROL UNIT
- EXTRACT FAN
- ELECTRICAL DISTRIBUTION BOARD
- GAS METER
- TV/FM AERIAL POINT
- TELEPHONE POINT
- SMOKE DETECTOR POINT
- WATER HEATER
- OPAL DRUM LUMINAIRE
- CARBON MONOXIDE DETECTOR
- COMMUNICALL CONTROL UNIT
- SURFACE MOUNTED CEILING MOUNTED EMERGENCY LIGHTING
- CEILING MOUNTED PART RECESSED FIRE ESCAPE ROUTE DIRECTIVE LUMINAIRE
- EXTERNAL LAMP WITH SENSOR
- DOOR ENTRY SYSTEM SENSOR
- WALL LIGHT

Electrical Fixtures:
Outlets and controls of electrical fixtures and systems should be positioned at least 350 mm from any internal corner, projecting wall or similar obstruction and, unless the need for a higher location can be demonstrated, not more than 1.2 m above floor level. This height range includes socket outlets, consumer units, fire alarm call points and timer controls or programmers. Within this height range,

- light switches should be positioned at a height of between 900 mm and 1.1 m above floor level.

- standard switched or unswitched socket outlets and outlets for other services such as telephone or television should be positioned at least 400 mm above floor level. Above an obstruction, such as a worktop, fixtures should be at least 150 mm above the projecting surface.

Where socket outlets are concealed, such as to the rear of white goods in a kitchen, easy access to switching should be provided in an accessible position, to allow appliances to be isolated.

ELECTRICAL LEGEND

PLANNING & WARRANT

Date Rev.

Bare Architecture Ltd
6 Golf View
Strathaven, ML10 6AZ
t : +44 (0)1698 209659
e : info@barearchitecture.com
w : www.barearchitecture.com

Job Title
Fraser Project
5 Kethers Lane
Motherwell, ML1 3HL

Drawing Title
Existing & Proposed Drawings

Scale	Sheet size	Drawn by	Date
As Indicated	A0	BMcM	15.02.22

File name
AR22004

Drawing number
AR22004 (BW) 001

Revision
B

A0