



Cornflower White ■
LRV 76

Lavender Drop ■
LRV 77

Mint Icing
LRV 83


Billow ■●
LRV 73

Beths Blue ■
LRV 61

Sugared Mint
LRV 75

Cloudy Blue
LRV 81

Cummulus ■●
LRV 68

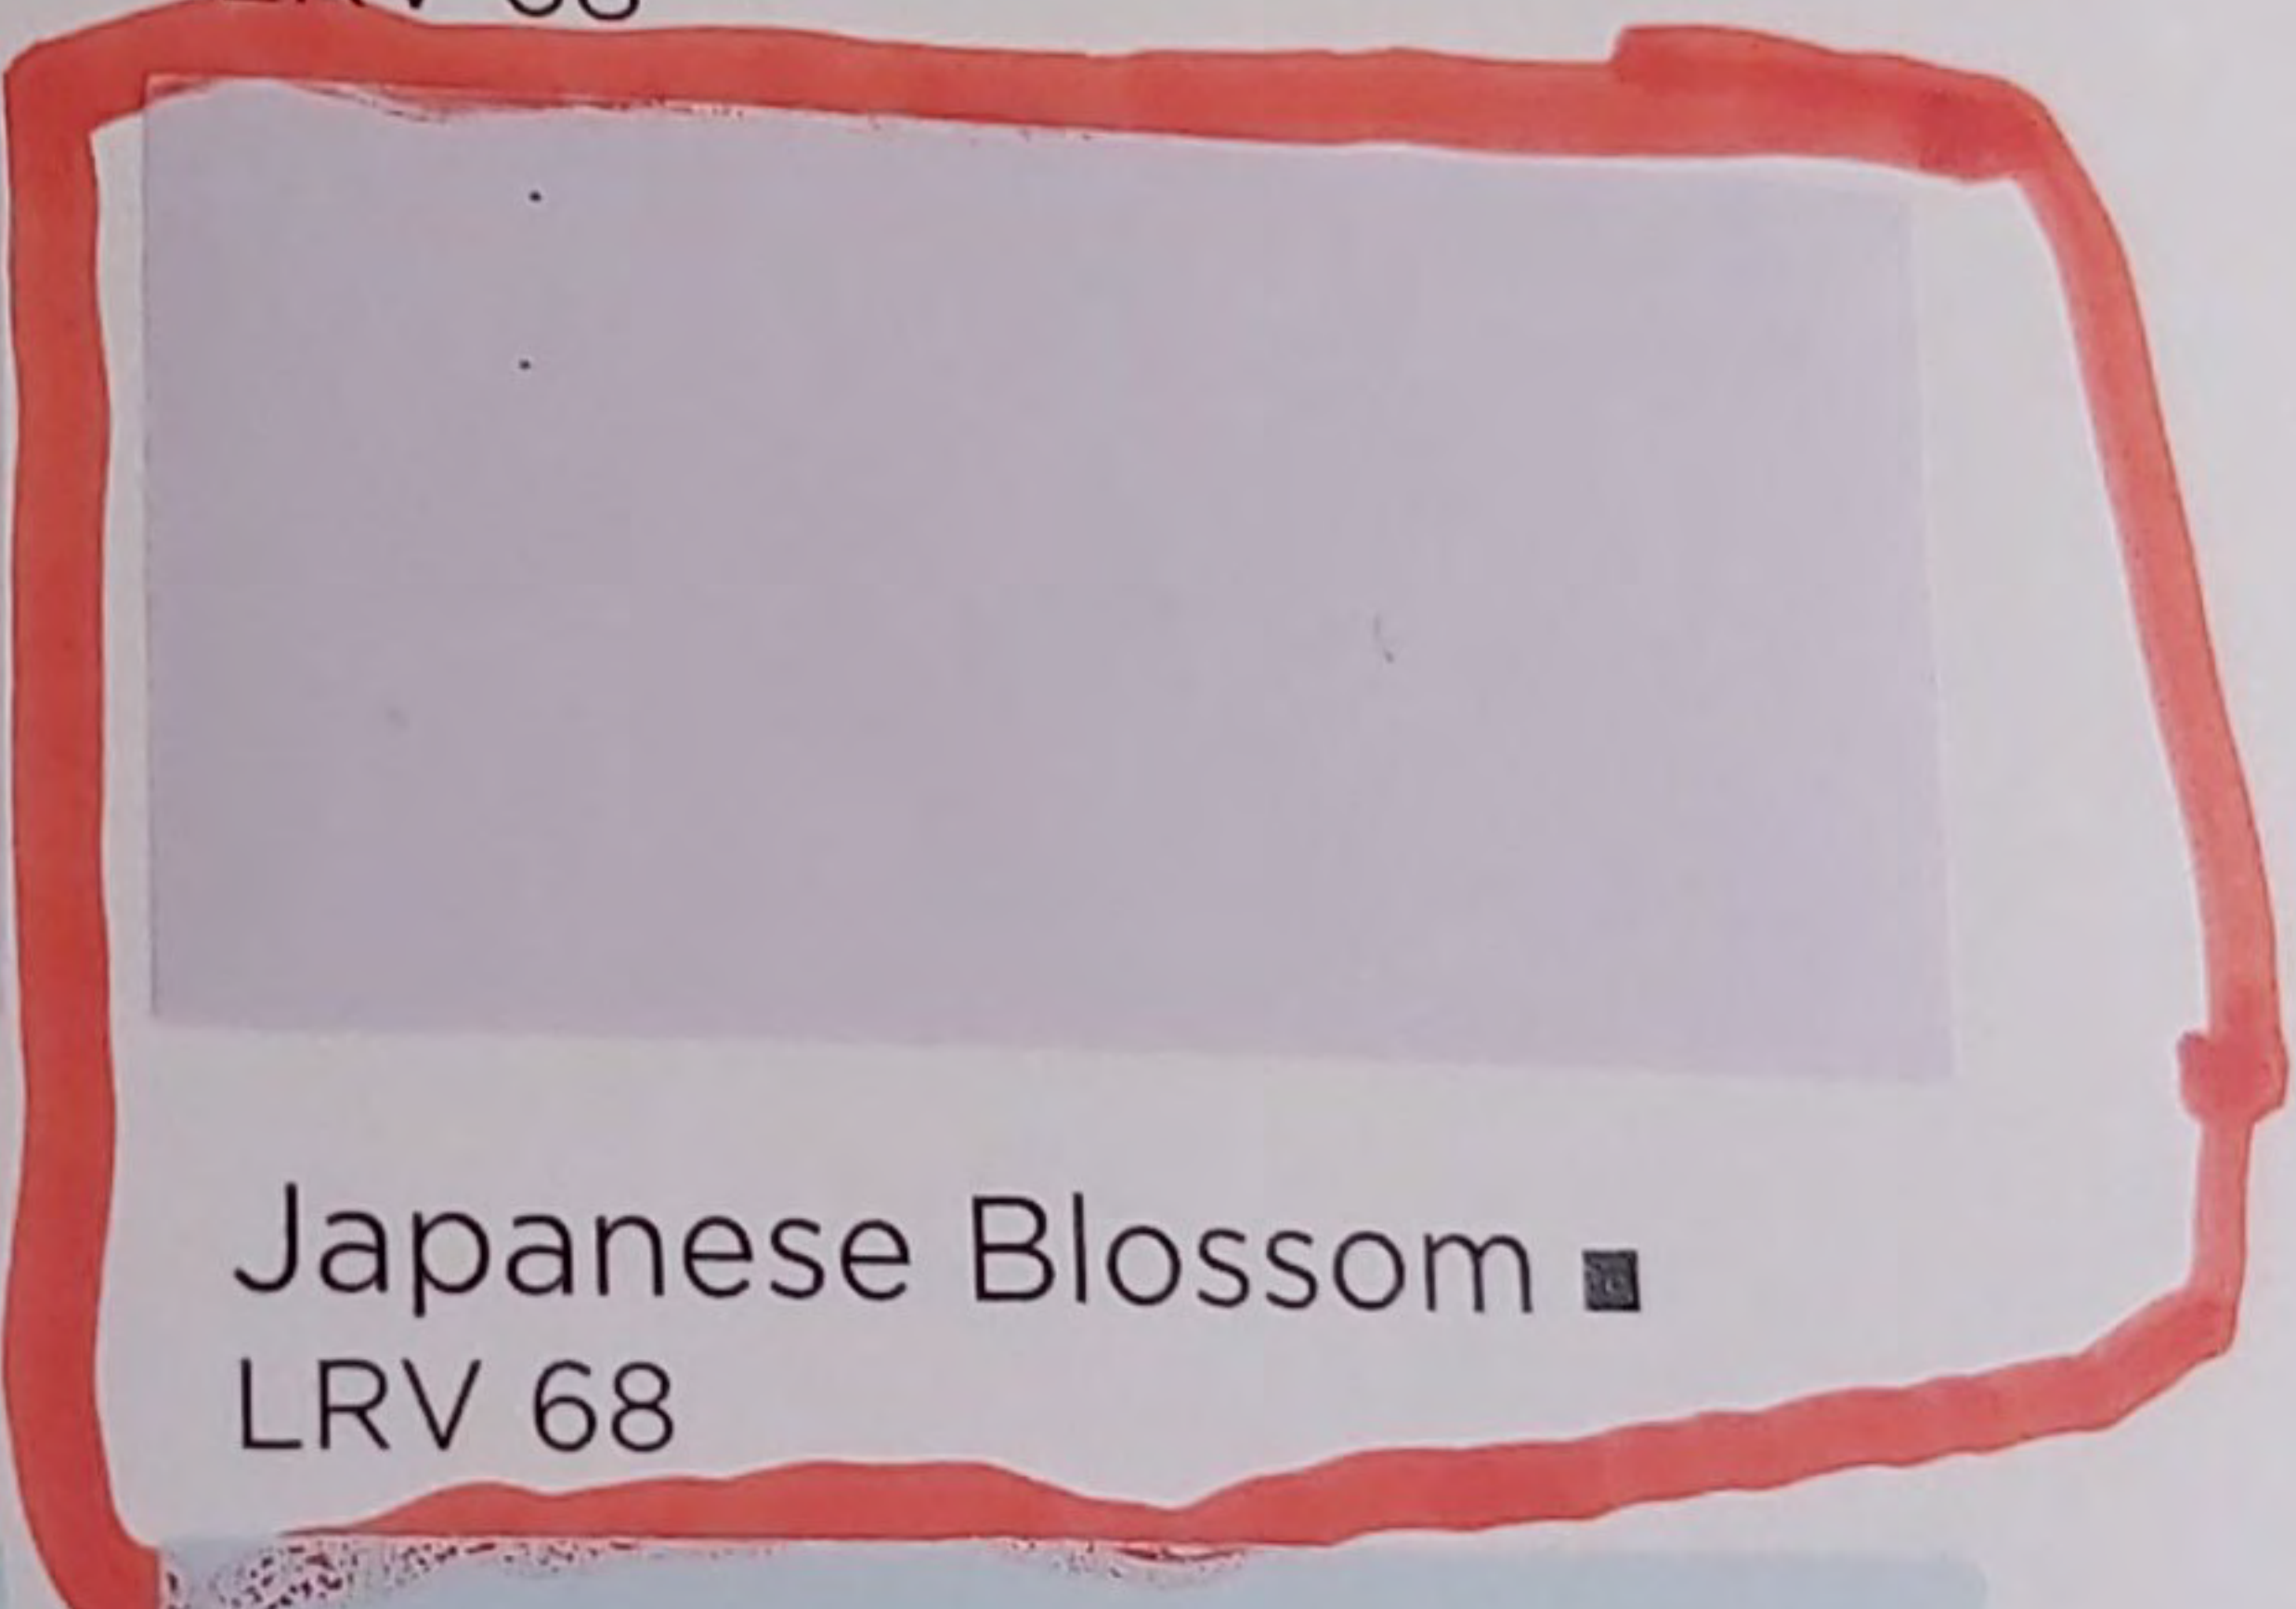

Japanese Blossom ■
LRV 68

Powdery Mint
LRV 71

Danish Blue ■
LRV 67

Mineral Baths
LRV 69

fields ■
LRV 81

Dollshouse ■●
LRV 71

Snow Tracks
LRV 83

Cotton Soft ■
LRV 83

Faded Blush
LRV 71

Sauvignon
LRV 81

Winter Avenue
LRV 72

Pink G
LRV 69

Pumice Grey ■
LRV 63

Age
LRV

Sweet Plum
LRV 70

Smokey Quartz
LRV 53



Armstead Trade Smooth Masonry Paint

JAPANESE BLOSSOM

About this product

Armstead Trade Smooth Masonry Paint is a professional quality, smooth exterior emulsion paint. It has an attractive high build finish and provides excellent coverage and application. It is also BBA certified to provide up to 15 years protection and is shower-resistant in 30 minutes

Key Benefits

- ✓ Up to 15 years protection
- ✓ Shower resistant in 30 minutes
- ✓ Anti-Carbonisation properties
- ✓ Water based

Special Features

- ✓ Excellent coverage

Technical Information

Touch dry	1-2 hours
Recoatable	2-4 hours
Coverage	From 6 to 12m ² /litre depending on surface texture
Thinning (normal use)	Water 10

Product Information

Typical Use

To get the best results with Armstead Trade Smooth Masonry, make sure surfaces to be painted are sound, clean and dry (new surfaces must be fully dry). See Armstead Trade Datasheet AM302 for full information before use, available free on request by telephoning 0333 222 7070 or visiting armsteadtrade.co.uk. Before surface preparation, read the adjacent information about old lead paints.

Composition

Water-based

Key Benefits

Up to 15 years protection, Shower resistant in 30 minutes, Anti-Carbonisation properties, Water based

Colour Range

Armstead Colour Guide, BS4800, RAL Classic, WOLF WEB UK (Painter) Armstead Ready Mix

Pack size

5L

Application Method

STIR THOROUGHLY BEFORE USE. On very absorbent surfaces a sealing coat of thinned Armstead Trade Smooth Masonry (up to 1 part clean water to 5 parts paint) should be applied. The normal finishing process is 1 or 2 full coats of Armstead Trade Smooth Masonry. Touch Dry: 1-2 hours. Recoat: 2-4 hours. Drying time will vary according to temperature and humidity e.g. the drying times quoted will be significantly longer in cold, damp conditions. Coverage up to 12m²/l depending on surface texture. These figures are only an approximate guide and may be reduced. If in doubt, apply a small trial area.