


2 Deerswood

Flood Risk Assessment
March 2021

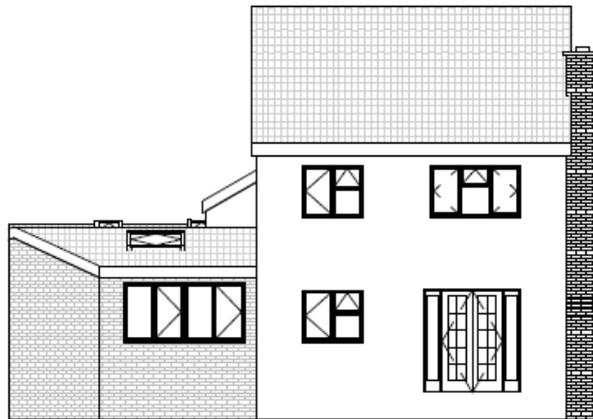

Quality Management

Job No	LE2021095		
Project	2 Deerswood Flood Risk Assessment		
Location	2 Deerswood, Maidenhead, SL6 8XF		
Title	Flood Risk Assessment		
Document Ref	LE2021095FRA	Issue / Revision	P01
Date	March 2021		

Revision Status / History

Rev	Date	Issue / Purpose/ Comment	Prepared
P01	March 2021	Final	ZY

This document has been produced by Liska Environmental Ltd for indicative purposes only and may be used solely by the original recipient. By making use of this document the original recipient acknowledges and accepts that Liska Environmental shall have no liability whatsoever in contract tort or otherwise to any party and shall indemnify and hold harmless Liska Environmental against any claims by any party in connection with this document. All intellectual property rights are reserved by Liska Environmental and any licence may be revoked at any time upon notice.

Contents

Executive Summary	4
1. Introduction	5
1.1 Requirement	5
1.2 Report Objectives	5
1.3 Limitations	5
1.4 Sources of Information	5
2. Policy and Guidance	6
2.2 Flood and Water Management Act, 2010	6
2.3 National Planning Policy Framework (NPPF), July 2018	7
3. Development Site Planning Considerations	8
3.1 Location	8
3.2 Proposed Development	8
3.3 Site Planning history	8
3.4 Local Geology	9
3.5 Hydrogeology	9
3.6 Flood Zone	9
3.7 Vulnerability Classification	10
3.8 Sequential Test and Exception Test	11
3.9 Climate change	11
3.10 Existing Flood Risk Management Infrastructure	11
4. Sources of Flooding – Actual Flood Risk	12
4.2 Fluvial Flood Risk	12
4.3 Flood Risk from Land, Surface Water and Sewers	12
4.4 Tidal Flood Risk	13
4.5 Groundwater Flood Risk	13
4.6 Flood Risk from Artificial Sources	13
4.7 Residual Flood Risk	14
4.8 Summary of flood risk	14
5. Flood Risk Management	15
6. Conclusions & Recommendations	17

Appendices

Appendix A Existing Site and Proposed Plans
Appendix B Environment Agency Flood Map for Planning

Executive Summary

Site Name	2 Deerswood Flood Risk Assessment
Location	2 Deerswood, Maidenhead, SL6 8XF
Grid Reference	489478, 182022
Area (ha)	Approximately 0.03ha
EA Flood Zone Classification	Flood Zone 3
Current Site Use	residential
Description of proposed	Erection of a single storey side extension
Vulnerability Classification	Residential – ‘More Vulnerable’
Summary of Pre-development Risks	<ul style="list-style-type: none"> • Fluvial Flood Risk: Low Risk • Tidal Flood Risk: Negligible Risk • Flood Risk from Land, Surface Water and Sewers: Low Risk • Groundwater Flood Risk: Low Risk • Flood Risk from Artificial Sources: Low Risk • Residual Flood Risk: High Risk
Management of Risks	<p>The proposed side extension would result in 6.2 additional ground floor square metres. The current proposal is less than 30 sqm and therefore complies with Local Plan Policy F1 and Paragraph 163 of the NPPF.</p> <p>Finished floor levels within the proposed side extension will be set no lower than existing levels. The extension will not be used as sleeping accommodation.</p> <p>The following flood resilient measures should be adopted to minimise the damage and to enable quick recovery and clean up after the flooding event:</p> <ul style="list-style-type: none"> • Non-return valves will be used in the drainage system to prevent back-flow of diluted sewage in situations where there is an identified risk of the foul sewer surcharging. • Wiring for telephone, TV, Internet and other services will be protected by suitable insulation to minimise damage. • Wall sockets will be raised to as high as is feasible and practicable to avoid damage if flood waters inundate the property.

1. Introduction

1.1 Requirement

1.1.1 Liska Environmental has been commissioned by De Jager Consulting Ltd to undertake a desk based Flood Risk Assessment (FRA) for a development at 2 Deerswood, Maidenhead, SL6 8XF (Figure 3-1). It is understood by Liska Environmental that this report is to support a planning application for the erection of a single storey side extension.

1.2 Report Objectives

1.2.1 The contents of this FRA describe the assessment of the proposal and the implications of the proposed development on flood risk. The FRA has been prepared following guidance provided in the revised National Planning Policy Framework (July 2018) and the Planning Policy Guidance (November 2016).

1.2.2 The aim of this assessment is to provide the level of detail necessary to demonstrate that the potential effects of flood risk (to the proposal) have been addressed by:

- Identifying the source and probability of flooding to the application site, including the possible effects of climate change;
- Determining the consequences of flooding to and from the proposed development proposal and advising on the how this will be managed, if necessary; and
- Demonstrating the flood risk issues described in this assessment are compliant with the relevant guidance.

1.3 Limitations

1.3.1 This report relies on publicly available information which Liska Environmental assumes to be correct: Liska Environmental cannot and does not verify accuracy of this data, and it is outside the scope of this commission to do so.

1.4 Sources of Information

1.4.1 Sources of information used during the compilation of this report include:

- Environment Agency (EA) website – ‘*Flood Map for Planning*’ [Accessed 26/03/2021];
- British Geological Survey (BGS) website – ‘*GeoIndex*’ and ‘*Lexicon of Named Rock Units*’ [Accessed 26/03/2021];
- Department of Environment, Food, and Rural Affairs (DEFRA) website – ‘*MAGIC Map Application*’ [Accessed 26/03/2021];
- Environment Agency (EA) website – ‘*Catchment Data Explorer*’ [Accessed 26/03/2021].

2. Policy and Guidance

2.1 Thames Catchment Flood Management Plan (CFMP), 2009

2.1.1 A Catchment Flood Management Plan (CFMP) is a high-level strategic plan prepared by the EA, which identifies long-term (50 to 100 year) policies for sustainable flood risk within a catchment.

2.1.2 The relevant key messages contained within the Thames Region CFMP (2009) are that:

- Climate change will be the major cause of increased flood risk in the future; in urban areas and areas of narrow floodplain, flooding from heavy rainfall will be more regular and more severe. Surface water, sewer and fluvial flooding can occur within minutes of a severe rainfall event. Flooding can therefore occur at any time of the year, and there is very little time to provide flood warnings.
- Development and urban regeneration provide a crucial opportunity to manage flood risk; the location, layout and design of development can all reduce flood risk. For example, the use of SuDS can help to control surface water runoff.
- NPPF should be applied to ensure that flood risk is managed appropriately.

2.2 Flood and Water Management Act, 2010

2.2.1 Combined with the Flood Risk Regulations 2009 ('the Regulations'), (which enact the EU Floods Directive in the England and Wales) the Flood and Water Management Act 2010 ('the Act') places significantly greater responsibility on Local Authorities to manage and lead on local flooding issues. The Act and the Regulations together raise the requirements and targets Local Authorities need to meet, including:

- Playing an active role leading Flood Risk Management;
- Development of Local Flood Risk Management Strategies (LFRMS);
- Implementing requirements of Flood and Water Management legislation;
- Development and implementation of drainage and flooding management strategies; and
- Responsibility for first approval, then adopting, management and maintenance of Sustainable Drainage Systems (SuDS) where they service more than one property.

2.2.2 The Act also clarifies three key areas that influence development:

1. **Sustainable Drainage Systems (SuDS)** - the Act makes provision for a national standard to be prepared on SuDS, and developers will be required to obtain local authority approval for in accordance with the standards, likely with conditions. Supporting this, the Act requires local authorities to adopt and maintain SuDS, removing any ongoing responsibility for developers to maintain SuDS if they are designed and constructed robustly.
2. **Flood risk management structures** - the Act enables the EA and local authorities to designate structures such as flood defences or embankments owned by third parties for protection if they affect flooding or coastal erosion. A developer or landowner will not be able to alter, remove or replace a designated structure or feature without first obtaining consent from the relevant authority.
3. **Permitted flooding of third party land** - The EA and local authorities have the power to carry out work, which may cause flooding to third party land where the works are deemed to be in the interest of nature conservation, the preservation of cultural heritage or people's enjoyment of the environment or of cultural heritage.

2.3 National Planning Policy Framework (NPPF), July 2018

2.3.1 In determining an approach for the assessment of flood risk for the proposal there is a need to review the policy context. The National Planning Policy Framework requires that consideration be given to flood risk in the planning process. The National Planning Policy Framework was revised and issued in July 2018 and outlines the national policy position on development and flood risk assessment.

2.3.2 The Framework states that the appropriate development in areas at risk of flooding should be avoided by directing development away from areas at highest risk. Where development is necessary in flood risk areas, it can be permitted provided it is made safe without increasing flood risk elsewhere.

2.3.3 The essence of NPPF is that:

- Local Plans should be supported by Strategic Flood Risk Assessment and develop policies to manage flood risk from all sources, taking advice from the Environment Agency and other relevant flood risk management bodies, such as lead local flood authorities and internal drainage boards;
- Policies in development plans should outline the consideration, which will be given to flooding issues, recognising the uncertainties that are inherent in the prediction of flooding and that flood risk is expected to increase as a result of climate change;
- Planning authorities should apply the precautionary principle to the issue of flood risk, using a risk-based search sequence to avoid such risk where possible and managing it elsewhere;
- The vulnerability of a proposed land use should be considered when assessing flood risk;
- Opportunities offered by new developments should be used to reduce the causes and impacts of flooding;
- Planning authorities should recognise the importance of functional floodplains, where water flows or is held at times of flood, and avoid inappropriate development on undeveloped and undefended floodplains; and
- Development is based on the concept of Flood Risk Reduction, particularly in circumstances where development has been sanctioned on the basis of the “Exception Test”.

3. Development Site Planning Considerations

3.1 Location

- 3.1.1 The site, of Approximately 0.03ha, is located at 2 Deerswood, Maidenhead, SL6 8XF at Ordnance Survey (OS) coordinates 489478, 182022.

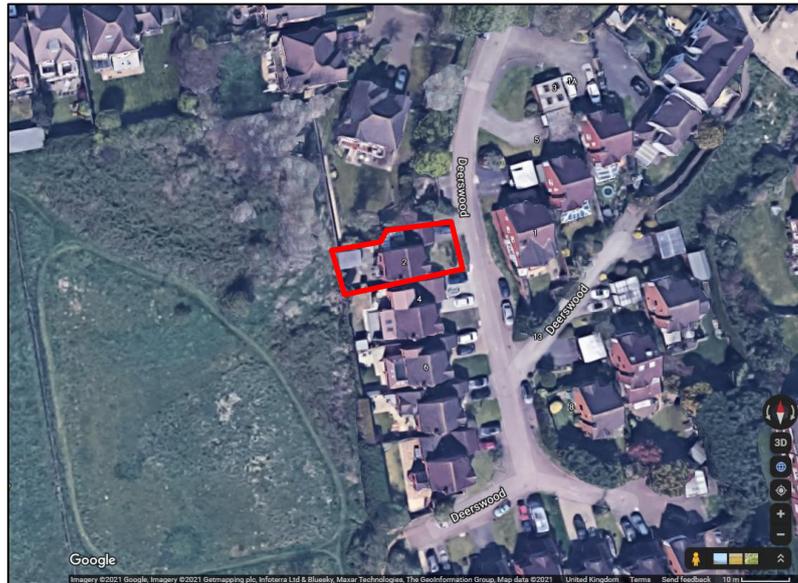


Figure 3-1 Site Boundary. Source: Google Map

3.2 Proposed Development

- 3.2.1 The proposal consists of the erection of a single storey side extension. Further details about the proposals have been provided in Appendix A.

3.3 Site Planning history

- 3.3.1 There is an existing converted garage which was constructed under permitted development rights in 2016.
- 3.3.2 It is proposed to demolish the existing conservatory (21.5 sqm) and erect a single storey side extension (27.7 sqm). Therefore, the proposed side extension would result in 6.2 additional ground floor square metres. The current proposal is less than 30 sqm and therefore complies with Local Plan Policy F1 and Paragraph 163 of the NPPF.

3.4 Local Geology

- 3.4.1 A review of the published geological information was carried out, including information from the BGS GeoIndex and Lexicon of Named Rock Units websites¹. The geological sequence underlying the Site is summarised in Table 3-1.

Table 3-1 Underlying Geological Sequence

Stratum	Name	Location	Parent Unit	Description
Bedrock Geology	Seaford Chalk Formation And Newhaven Chalk Formation (undifferentiated) - Chalk	Onsite	White Chalk Subgroup (WHCK)	Sedimentary Bedrock formed approximately 72 to 90 million years ago in the Cretaceous Period. Local environment previously dominated by warm chalk seas.
Superficial Deposits	Shepperton Gravel Member - Sand And Gravel	Onsite	Maidenhead Formation (MNHD)	Superficial Deposits formed up to 2 million years ago in the Quaternary Period. Local environment previously dominated by rivers (U).

- 3.4.2 The BGS geological mapping shows that the Site superficial comprises Shepperton Gravel Member - Sand And Gravel. These sedimentary deposits are fluvial in origin. They are detrital, ranging from coarse- to fine-grained and form beds and lenses of deposits reflecting the channels, floodplains and levees of a river or estuary (if in a coastal setting).
- 3.4.3 The BGS geological mapping shows that the Site bedrock comprises Seaford Chalk Formation And Newhaven Chalk Formation (undifferentiated) - Chalk. These sedimentary rocks are shallow-marine in origin. They are biogenic and detrital, generally comprising carbonate material (coccoliths), forming distinctive beds of chalk.

3.5 Hydrogeology

- 3.5.1 Both the bedrock geology and the Superficial Deposits are designated as Principal Aquifers. These are geological strata with high permeability and/or provide a high level of water storage.
- 3.5.2 The nearest surface water feature is Strand Water which is located at approximately 320 m to the west of the site.

3.6 Flood Zone

- 3.6.1 Flood Zones describe the extent of flooding that would occur on the assumption that no flood defences are in place. The definition of Flood Zones is provided in Table 1 of the PPG and in table 3.1 below:

¹ <http://mapapps.bgs.ac.uk/geologyofbritain/home.html>

Table 3-1: Flood zone terminology

Flood Zone	Definition
Zone 1 Low Probability	Land having a less than 1 in 1,000 annual probability of river or sea flooding. (Shown as 'clear' on the Flood Map – all land outside Zones 2 and 3)
Zone 2 Medium Probability	Land having between a 1 in 100 and 1 in 1,000 annual probability of river flooding; or Land having between a 1 in 200 and 1 in 1,000 annual probability of sea flooding. (Land shown in light blue on the Flood Map)
Zone 3a High Probability	Land having a 1 in 100 or greater annual probability of river flooding; or Land having a 1 in 200 or greater annual probability of sea flooding. (Land shown in dark blue on the Flood Map)
Zone 3b The Functional Floodplain	This zone comprises land where water has to flow or be stored in times of flood. Local planning authorities should identify in their Strategic Flood Risk Assessments areas of functional floodplain and its boundaries accordingly, in agreement with the Environment Agency. (Not separately distinguished from Zone 3a on the Flood Map)

3.6.2 The site lies within the Environment Agency's Flood Zone 3, which is described within PPG Table 1 as having a 'High Probability' of flooding. The Environment Agency's flood zone map is shown in Appendix B.

3.7 Vulnerability Classification

3.7.1 The proposed development is considered to fall under the classification of 'More Vulnerable' land uses based on Table 2 of PPG Technical Guidance. Table 3: Flood Risk Vulnerability and Flood Zone Compatibility in PPG, states that these land uses are compatible in Flood Zone 3 (with the requirement to apply the Exception Test) (as in Table 3.2 below).

Table 3.2: Flood Zone Risk and Vulnerability

Flood Zones	Flood Risk Vulnerability				
	Essential infrastructure	Highly vulnerable	More vulnerable	Less vulnerable	Water compatible
Zone 1	✓	✓	✓	✓	✓
Zone 2	✓	Exception Test required	✓	✓	✓
Zone 3a	Exception Test required	✗	Exception Test required	✓	✓
Zone 3b	Exception Test required	✗	✗	✗	✓

Key: ✓Development is appropriate XDevelopment should not be permitted

3.8 Sequential Test and Exception Test

- 3.8.1 Paragraph 101 of the NPPF sets out guidance on the application of the Sequential Test, the aim of which is to steer new development to areas with the lowest probability of flooding. Development should not be allocated or permitted if there are reasonably available sites appropriate for the proposed development in areas with a lower probability of flooding. Where areas of lower risk are not available, the Exception Test, as set out in paragraph 102 of the NPPF can be applied, to ensure that flood risk to people and property will be managed satisfactorily.
- 3.8.2 The proposed side extension would result in 6.2 additional ground floor square metres. The current proposal is less than 30 sqm and therefore complies with Local Plan Policy F1 and Paragraph 163 of the NPPF.
- 3.8.3 As the proposed development is classified as a 'Minor Development', and there would be no additional vulnerability to flood risk nor any worsening of flood risk elsewhere over that as a result of the proposal on this site. Therefore, a Sequential and Exception Test are considered as passed.

3.9 Climate change

- 3.9.1 The 'Flood risk assessments: climate change allowances' (2016) guidance outlines the allowances that are to be made for climate change when undertaking any form of flood risk assessment. This ensures that vulnerability of the development is minimised and that is resilient to flooding and coastal change in the future. These climate change allowances outlined in Table 2 of the above guidance are predictions of anticipated change for peak river flow, peak rainfall intensity, sea level rise and offshore wind speed and extreme wave height. Table 3.3 provides a precautionary response to the uncertainty about climate change impacts on rainfall intensities and river flows for the Thames River Basin District.

Table 3.3: Climate change risk

Parameter	Allowance Category	2015 to 2039	2040 to 2069	2070 to 2115
Peak River Flow	Upper End	25%	35%	70%
	Higher Central	15%	25%	35%
	Central	10%	15%	25%
Peak Rainfall Intensity	Upper End	10%	20%	40%
	Central	5%	10%	20%

- 3.9.2 The choice of the allowance category to be applied to the development is dependent on the type of development and the flood zone in which it lies. As the proposed development is classified as "More Vulnerable" and is located in flood zone 3, a 'Upper End allowance (i.e. +40% of peak rainfall intensity) will be taken into account, assuming there is a direct correlation between peak rainfall intensity and flood depth.

3.10 Existing Flood Risk Management Infrastructure

- 3.10.1 According to the Environment Agency's flood zone map the Site is in Flood Zone 3 and the site benefits from flood defences .

4. Sources of Flooding – Actual Flood Risk

4.1.1 The NPPF describes potential sources of flooding. It is necessary to consider the risk of flooding from all sources within a FRA. This section provides a review of flooding from land, sewers, groundwater and artificial sources, in addition to that from rivers and the sea.

4.2 Fluvial Flood Risk

4.2.1 The Environment Agency’s Flood map for Planning, was used to identify risk of flooding at site (refer Appendix B). These confirm that the site is in Flood Zone 3 and the site benefits from flood defences.

4.3 Flood Risk from Land, Surface Water and Sewers

4.3.1 Flooding from land can be caused by rainfall being unable to infiltrate into the natural ground or entering the drainage systems due to blockage, or flows being above design capacity. This can then result in (temporary) localised ponding and flooding. The natural topography and location of buildings/structures can influence the direction and depth of water flowing off impermeable and permeable surfaces.

4.3.2 Surface water flooding can be difficult to predict, much more so than river or sea flooding as it is hard to forecast exactly where or how much rain will fall in any storm. The Environment Agency classifies the site, as being within a low risk area of flooding (i.e. each year this area has a chance of flooding of between 0.1% and 1%).

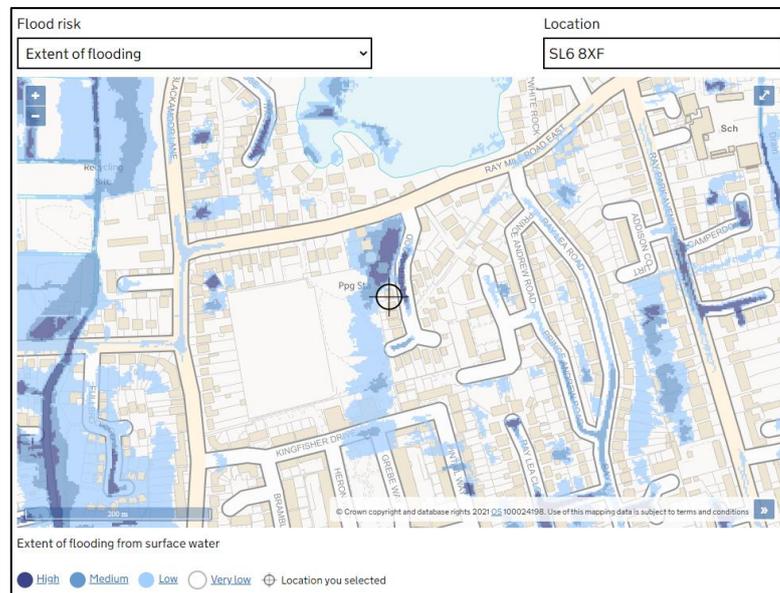


Figure 4-1: Surface Water Flood Map (Source Environment Agency²)

² <http://watermaps.environment-agency.gov.uk/wiyby/wiyby.aspx?&topic=ufmfsw#x=357683&y=355134&scale=2>
[accessed 26/03/2021]

4.4 Tidal Flood Risk

4.4.1 Tidal flooding occurs when a high astronomical tide and storm (tidal surge) exceeds the level of coastal land or coastal flood defences. Tidal flooding can also be caused by ‘tide locking’ of rivers or estuaries. Tide locking prevents a river from discharging into the sea, causing ‘backing up’ and resulting in tidal/fluviol flooding.

4.4.2 The Site is not located within an area at risk from tidal flooding.

4.5 Groundwater Flood Risk

4.5.1 The RBWM SFRA Figure E confirms that the site is located in the areas susceptible to groundwater flooding. As the proposed development is for the side extension on ground floor, therefore there is a low risk of groundwater flooding to the site.

4.6 Flood Risk from Artificial Sources

4.6.1 Artificial sources of flooding include reservoirs, canals, ponds and mining abstraction.

4.6.2 A review of the Environment Agency Reservoir Maps indicates that the site is not located within an area at risk from reservoir flooding.



Figure 4-2: Extend of flooding from reservoirs (Source Environment Agency³)

³ <http://watermaps.environment-agency.gov.uk/wiyby/wiyby.aspx?&topic=ufmfs#wx=357683&y=355134&scale=2>
[accessed 26/03/2021]

4.7 Residual Flood Risk

- 4.7.1 Residual Risk is defined as ‘the risk which remains after risk avoidance, reduction and mitigation measures have been implemented’. For the purpose of assessing flood risk, it is assumed that events greater than those assessed as Actual Risk are considered a ‘Residual Risk’.
- 4.7.2 As proposed development is located in a high flood risk zone and does benefit from the presence of significant defences. As such, the residual risk to the site could be considered to be relatively high.

4.8 Summary of flood risk

- 4.8.1 Table 4.1 below summarises the types of flood risk at the Site:

Table 4-1: Summary of flood risk

Source of risk	Ongoing risk
Fluvial Flood Risk	Low Risk
Tidal Flood Risk	Negligible Risk
Flood Risk from Land, Surface Water and Sewers	Low Risk
Groundwater Flood Risk	Low Risk
Flood Risk from Artificial Sources	Low Risk
Residual Flood Risk	high Risk

5. Flood Risk Management

Principles of Flood Risk Management

- 5.1.1 NPPF requires a precautionary approach to be undertaken when making land use planning decisions regarding flood risk. This is partly due to the considerable uncertainty surrounding flooding mechanisms and how flooding may respond to climate change. It is also due to the potentially devastating consequences of flooding to the people and property affected.
- 5.1.2 Flood risk is a combination of the probability of flooding and the consequences of flooding. Hence 'managing flood risk' involves managing either, the probability of flooding or the consequences of flooding, or both.
- 5.1.3 NPPF requires flooding from tidal, fluvial, land, surface water & sewerage and from groundwater to be considered. The flood risk management measures discussed in this section are based on the sources of flooding identified in Section 4 that are considered to pose a risk to the development proposals.

Flood Resilient Measures

- 5.1.4 The flood risk management measures discussed in this section are based on the sources of flooding identified in section 4. The following flood resilient measures should be adopted to minimise the damage and to enable quick recovery and clean up after the flooding event:
- Non-return valves will be used in the drainage system to prevent back-flow of diluted sewage in situations where there is an identified risk of the foul sewer surcharging.
 - Wiring for telephone, TV, Internet and other services will be protected by suitable insulation to minimise damage.
 - Wall sockets will be raised to as high as is feasible and practicable to avoid damage if flood waters inundate the property.

Finished Floor Level (FFL)

- 5.1.5 Finished floor levels within the proposed side extension will be set no lower than existing levels. The extension will not be used as sleeping accommodation.

Off Site Impacts

- 5.1.6 The proposed development is for the erection of a single storey side extension at 2 Deerswood. It is understood that as a result of the proposed development there would be no increase in impermeable area.
- 5.1.7 The proposed side extension would result in 6.2 additional ground floor square metres. The current proposal is less than 30 sqm and therefore complies with Local Plan Policy F1 and Paragraph 163 of the NPPF.

5.1.8 Given the small scale of the development there is limited scope to implement large scale SuDS on site. Furthermore, the small extension is likely to have minimal impact on runoff rates post-development. However, it is recommended that the developer assess the feasibility to implement SuDS as part of the proposed design to limit the runoff generated by the proposed development and consequently, provide betterment to the existing surface water flooding on site.

5.1.9 As such, there will likely be negligible change in the surface water runoff rate under post-development conditions.

Safe Access/Egress Arrangements

5.1.10 Demonstrating safe access and egress is available for the site for the development lifetime is a key factor in demonstrating compliance with the NPPF. This requires site occupants to be able to safely access and exit their dwellings in design flood conditions. Vehicular access to allow the emergency services to safely reach the development during design flood conditions is also normally required.

5.1.11 In order for the development to be classified as safe users should be able evacuate the site building before an extreme flood. Key points to note are:


- Occupiers would have more than 24 hours' notice of severe weather warning service.
- The Environment Agency and Emergency Services would evacuate the area should a breach be detected or expected. This is likely to occur if a breach were spotted well in advance of inundation.
- Following the receipt of flood warning it is recommended that the site is evacuated and closed and is only re-opened when it is safe to do so taking advice from the Environment Agency and the Local Authority. In the event that users cannot reach an evacuation area, it is suggested that safe refuge is sought in locations such as the upper storeys of the main building.

5.1.12 As a further precaution, the Environment Agency provides a warning system, which is free to all users, including their flood warning feeds, flood warning widget, live flood warning map and three day flood risk forecast.


6. Conclusions & Recommendations

- 6.1.1 An assessment of areas potentially at risk from flooding has been undertaken and the development proposals have been examined in relation to their potential to increase flood risk both on and off site. This desk based FRA accompanies the full planning application for the erection of a single storey side extension at 2 Deerswood, to demonstrate that flood risk has been given material consideration throughout the development planning process and development should not be restricted at this Site due to flood risk.
- 6.1.2 The site is located within Flood Zone 3 according to the Environment Agency Flood Zones Maps. The current and proposed development Site use is classified as a 'More Vulnerable' land use and 'Minor Development' according to NPPF. Therefore, the site is compatible with the Environment Agency's vulnerability tests.
- 6.1.3 The proposed side extension would result in 6.2 additional ground floor square metres. The current proposal is less than 30 sqm and therefore complies with Local Plan Policy F1 and Paragraph 163 of the NPPF.
- 6.1.4 In line with the NPPF, all sources of flooding have been considered and assessed, using readily available sources of information. It should be noted that at this stage no detailed modelling has been undertaken. The site is located in the area with high risk from residual risk and low risk from all other sources including rivers, surface water, tidal risk, groundwater, sewer and reservoir.
- 6.1.5 The development proposal has considered flood risk at all stages throughout the development of the final layout and reflects the flood risk constraints and the need to manage, and where possible reduce, flood risk in compliance with the guidance in NPPF. The proposal will not increase the risk of flooding to others and as a result, proposed development at this site should not be restricted as a result of flood risk.

Appendix A Existing Site and Proposed Plans

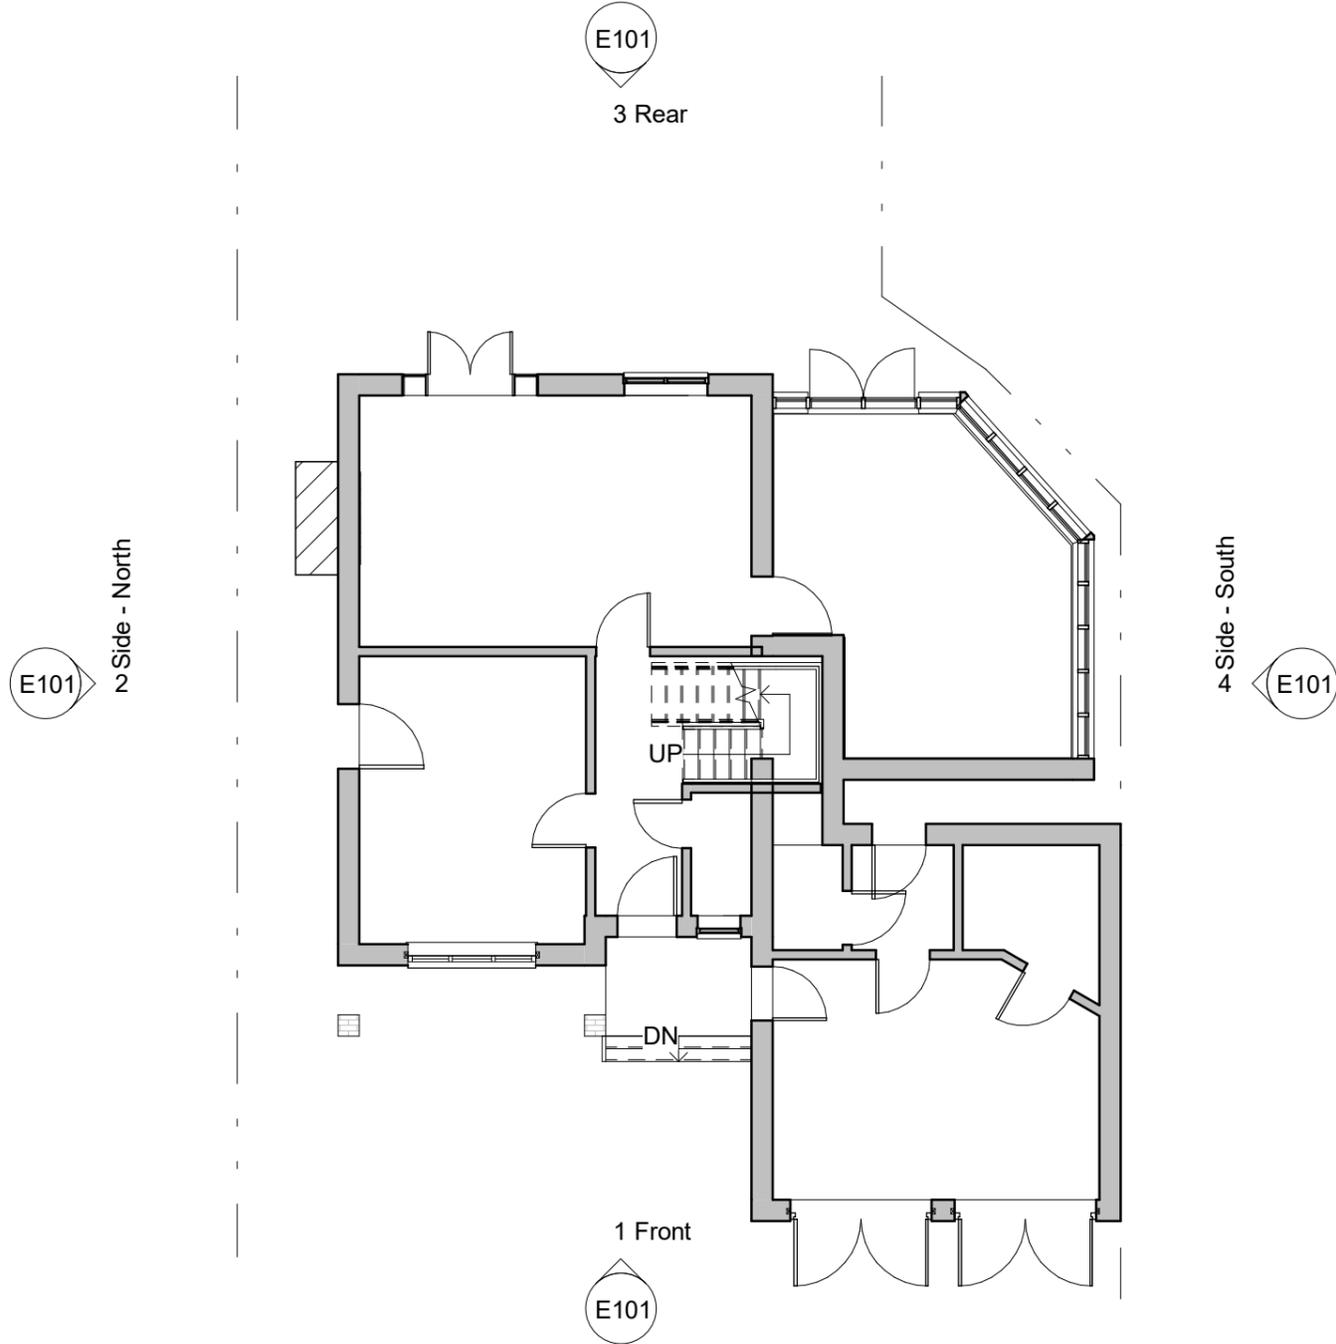

1 Ground
1 : 100

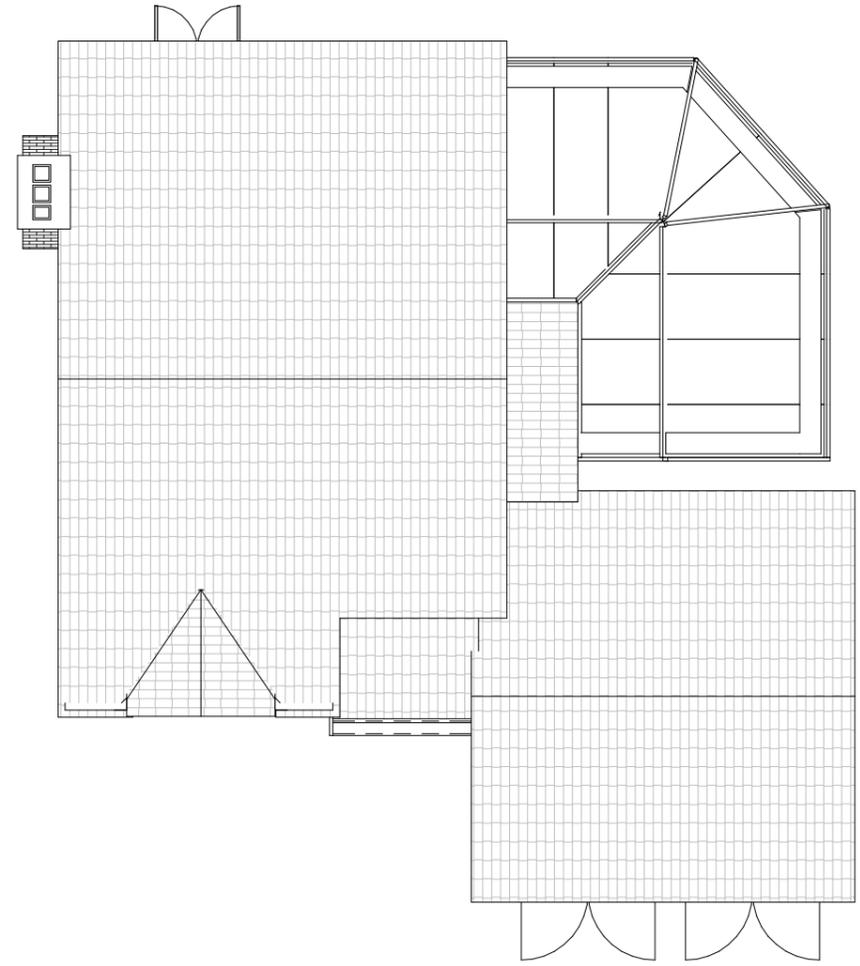

2 Roof
1 : 100



Natalie Hill
2 Deerswood
Maidenhead
Berkshire
SL6 8XF


Existing Ground and Roof plan

4 March 2021

20/02 E100




1 Front
1 : 100

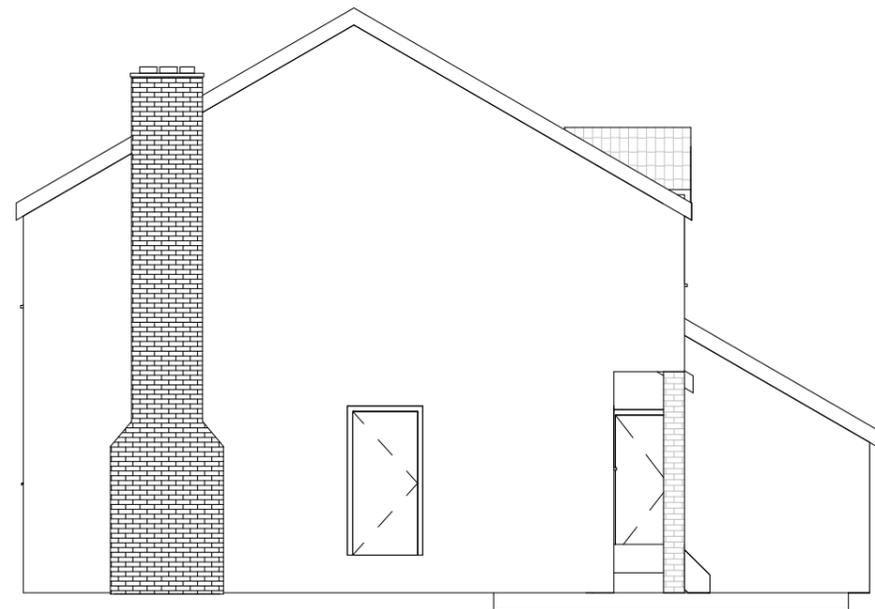

2 Side - North
1 : 100



3 Rear
1 : 100

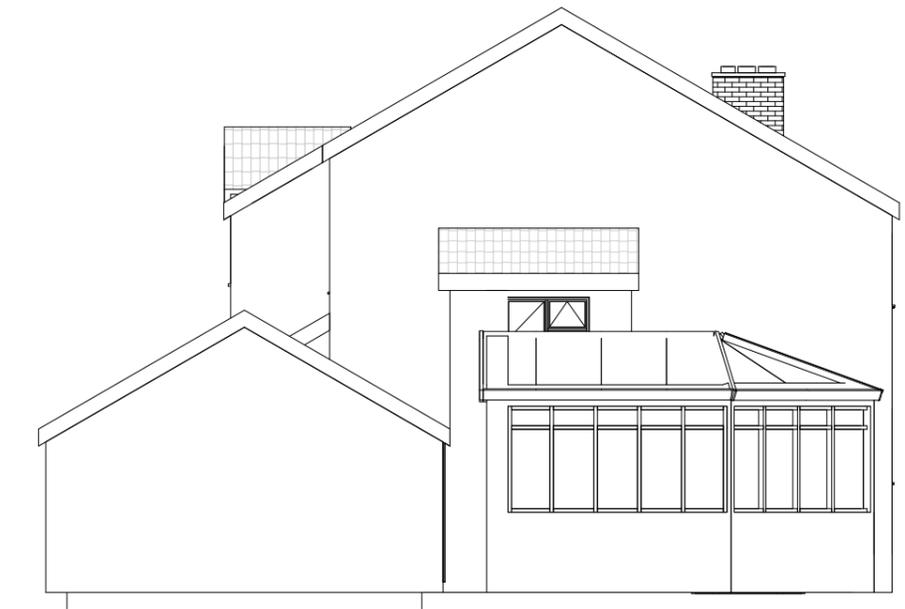

4 Side - South
1 : 100



Natalie Hill
2 Deerswood
Maidenhead
Berkshire
SL6 8XF

Existing Elevations

4 March 2021


20/02 E101

Project Status


For Planning

Scale @ A3

1 : 100

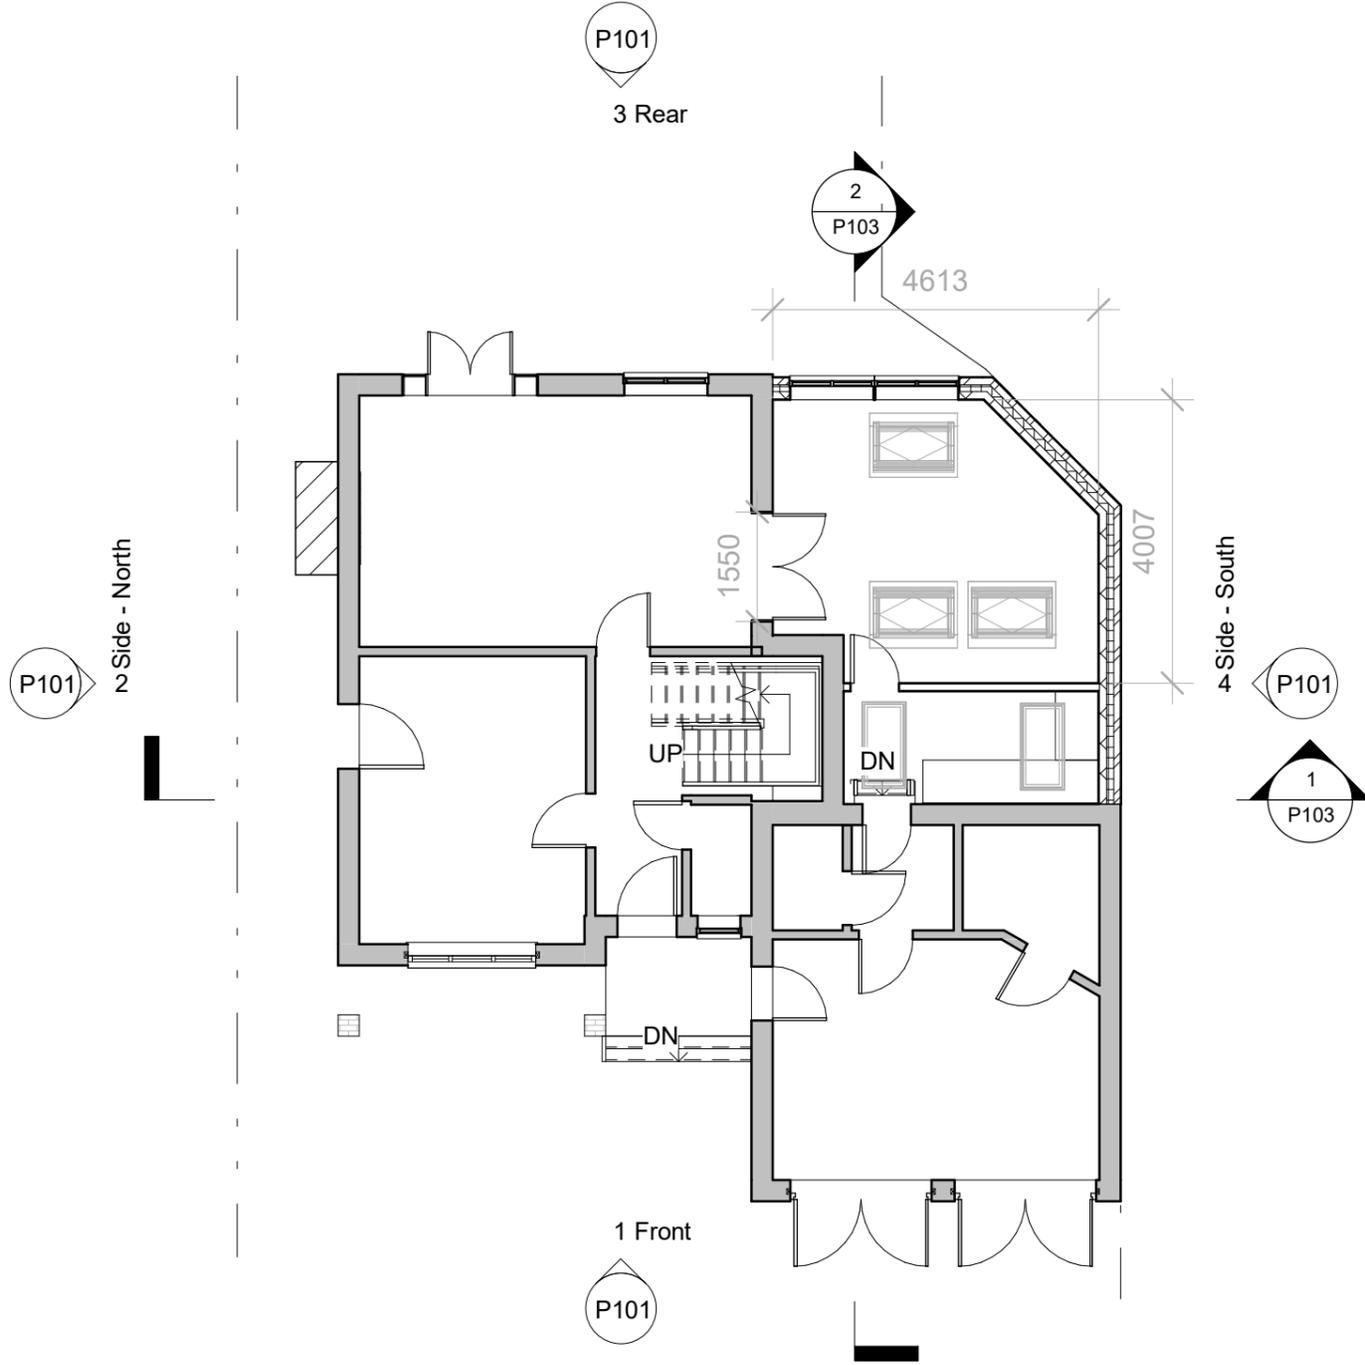

1 Ground
1 : 100

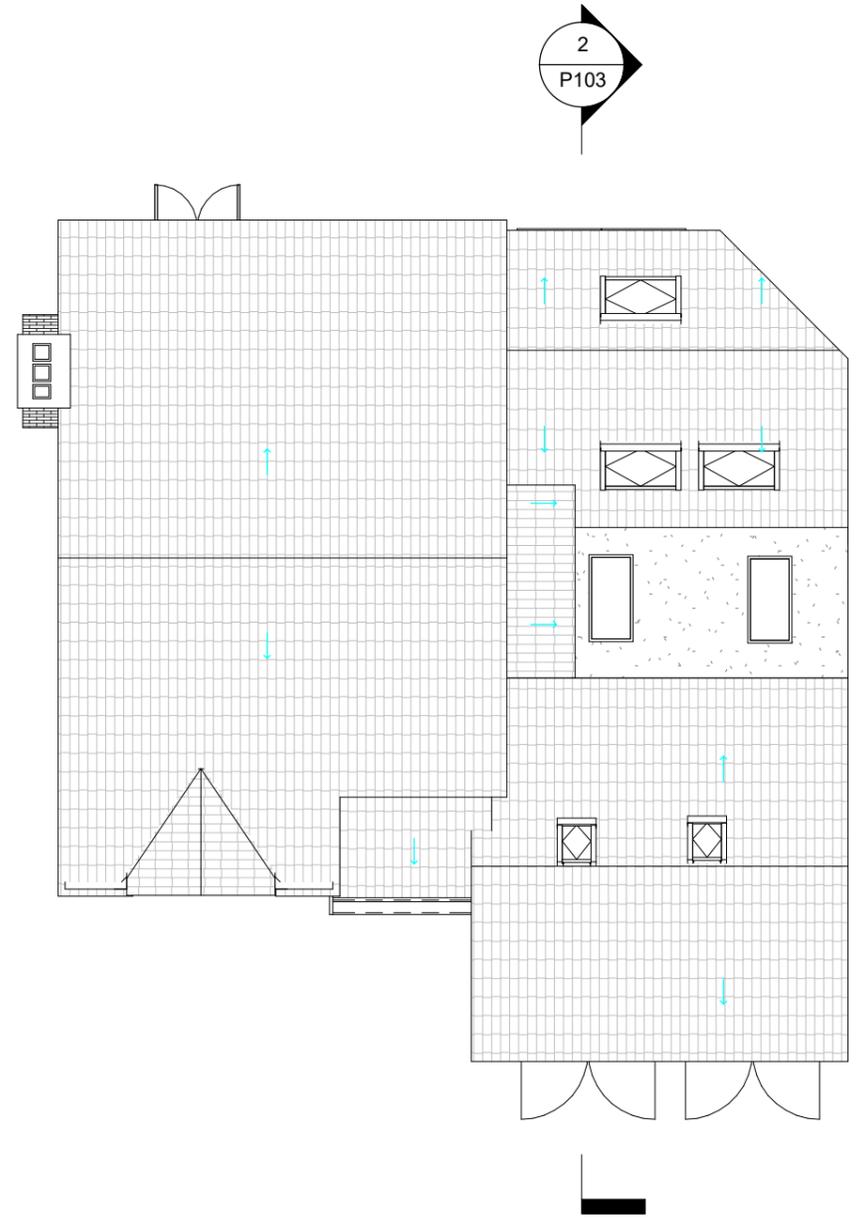

2 Roof
1 : 100



Natalie Hill
2 Deerswood
Maidenhead
Berkshire
SL6 8XF


Proposed Ground and Roof plan

25 March 2021

20/02 P100




1 Front
1 : 100

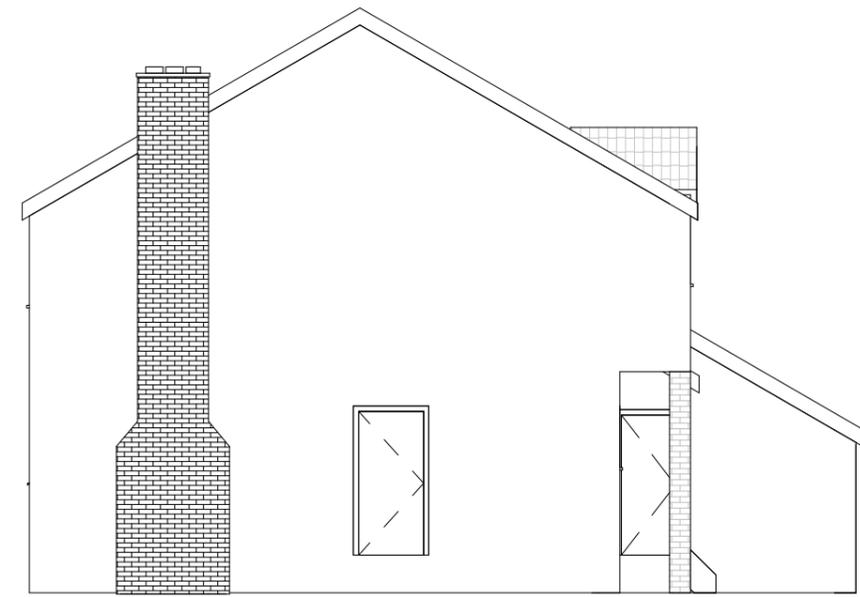

2 Side - North
1 : 100



3 Rear
1 : 100

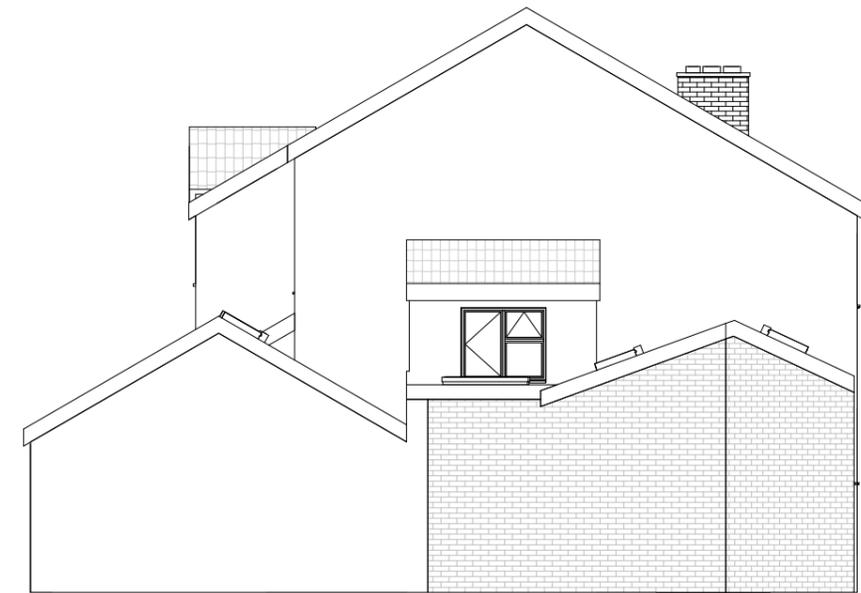

4 Side - South
1 : 100



Natalie Hill
2 Deerswood
Maidenhead
Berkshire
SL6 8XF

Proposed Elevations

25 March 2021

20/02 P101

Project Status

For Planning

Scale @ A3

1 : 100

Appendix B Environment Agency Flood Map for Planning



Flood map for planning

Your reference	Location (easting/northing)	Created
SL6 8XF	489477/182022	26 Mar 2021 17:35

Your selected location is in flood zone 3 – an area with a high probability of flooding that benefits from flood defences.

This means:

- you may need to complete a flood risk assessment for development in this area
- you should ask the Environment Agency about the level of flood protection at your location and request a Flood Defence Breach Hazard Map (You can email the Environment Agency at: enquiries@environment-agency.gov.uk)
- you should follow the Environment Agency's standing advice for carrying out a flood risk assessment (find out more at www.gov.uk/guidance/flood-risk-assessment-standing-advice)

Notes

The flood map for planning shows river and sea flooding data only. It doesn't include other sources of flooding. It is for use in development planning and flood risk assessments.

This information relates to the selected location and is not specific to any property within it. The map is updated regularly and is correct at the time of printing.

The Open Government Licence sets out the terms and conditions for using government data. <https://www.nationalarchives.gov.uk/doc/open-government-licence/version/3/>

