



57 Harley Street, W1G

Daylight and Sunlight Assessment

Job No: 4479

Issued: June, 2022

Issue No.: 1

Contents

1.0	Introduction.....	3
2.0	Project Summary.....	4
3.0	Methodology.....	5
4.0	Modelling & Data Sources.....	6
5.0	BRE Guidance Targets.....	7
6.0	Window Schedules.....	8
7.0	Daylight Impact Results – VSC Test.....	9
8.0	Sunlight Impact Results.....	10
9.0	Conclusions.....	11

Document Prepared By:

Document Authorised By:

Ollie Westover

Bernice Waterman

Dated:

Dated:

27.06.22

27.06.22

Signed:

Signed:



This report has been prepared for the exclusive use of the commissioning party and may not be reproduced without prior written permission from T16 Design.

All work has been carried out within the terms of the brief using all reasonable skill, care, and diligence. No liability is accepted by T16 Design for the accuracy of data or opinions provided by others in the preparation of this report, or for any use of this report other than for the purpose for which it was produced.

1.0 Introduction

- 1.1 This daylight and sunlight assessment has been prepared to support a planning application for the proposed extension of the site at 57 Harley Street, London W1G.
- 1.2 The report assesses the proposals in respect of daylight, sunlight and overshadowing matters, having regard to industry standard guidance.
- 1.3 The report concludes that the proposal is acceptable and in accordance with planning policy requirements in relation to daylight and sunlight.
- 1.4 There is no existing specific National Planning Policy relating to the prospective impacts of developments on daylight and sunlight on their surrounding environment.
- 1.5 However, the BRE Report 'Site Layout Planning for Daylight and Sunlight: A Guide to Good Practice' is the established National guidance to aid the developer to prevent and/or minimise the impact of a new development on the availability of daylight and sunlight in the environs of the site. It has been developed in conjunction with daylight and sunlight recommendations in BS 8206: Part 2: 'Lighting for Buildings - Code of Practice for Daylighting'
- 1.6 This reference document is accepted as the authoritative work in the field on daylight, sunlight and overshadowing and is specifically referred to in many Local Authorities' planning policy guidance for daylighting. The methodology therein has been used in numerous lighting analyses and the standards of permissible reduction in light are accepted as the industry standards.

2.0 Project Summary

- 2.1 The proposal site is at 57 Harley Street and is occupied by a 6-storey building
- 2.2 The proposal is for the infilling of the existing lightwell, including the raising of the parapet wall between the site and its neighbour at No. 59 Harley Street.
- 2.3 The impacts of the scheme have been assessed, in line with BRE guidance. Generally, it is the impacts on residential neighbours which are of primary concern.
- 2.4 Further details on the location of the assessed neighbours and their windows are given in Section 5.0

Neighbouring Windows



Site Location

3.0 Methodology

- 3.1 For this analysis, we have undertaken the most common calculations for the change in daylight and sunlight to existing buildings, as recommended in BRE Digest 209. These are:
 - 3.2 Vertical Sky Component (VSC) for daylight
 - 3.3 Annual Probable Sunlight Hours and Winter Probable Sunlight Hours (A/WPSH) for sunlight impacts
 - 3.4 The VSC method measures the general amount of light available on the outside plane of the window as a ratio (%) of the amount of total unobstructed sky viewable following introduction of visible barriers such as buildings. The maximum value is just under 40% for a completely unobstructed vertical wall.
 - 3.5 The VSC is calculated using computer simulation under a CIE overcast sky. This works by simulating the amount of visible sky from the centre point of each window. It is not affected by orientation and so all potentially affected windows are assessed.
 - 3.6 Annual Probable Sunlight Hours (APSH) and Winter Probable Sun light Hours (WPSH) are a measure of the amount of potential direct sunlight that is available to a given surface. APSH covers sunlight over the whole year and WPSH from September 21st to March 21st. The number of total available hours is calculated from a data file in the software, built up over a number of years of actual weather data records.
 - 3.7 Only windows which face within 90° of due south need be assessed for sunlight.
 - 3.8 APSH can also be used to assess the impact on external spaces such as gardens. In this instance no neighbouring gardens are at risk of adverse impact.


4.0 Modelling & Data Sources

- 4.1 The first stage of the analysis is to create the analysis model of the existing site condition and the proposal. This allows us to analyse the impact of the proposal when compared to the existing condition.
- 4.2 2D drawings have been provided by the design team. These drawings are used to construct a 3D analysis model which is exported into the specialist daylight software. Calculations are then run, for both existing and proposed scenarios.
- 4.3 Sufficient detail is added to the model for the analysis. In accordance with BRE recommendations, trees and foliage have been omitted from the calculations.
- 4.4 Information on the properties has been provided to us by the design team in the form of drawings giving the site as existing and proposed and photographs of the site and surroundings.
- 4.5 Web-based mapping sources and planning records for neighbouring buildings have also been used.

5.0 BRE Guidance Targets

- 5.1 The reference document for this analysis, BRE Digest 209, gives the methodology for undertaking the calculations. It also provides benchmark figures for the acceptable reduction in the daylight on existing properties which might be affected by development.
- 5.2 Specifically, the guidance gives figures for the VSC, NSL and A/WPSH, as a percentage reduction that is "permissible" for the effect on existing windows.
- 5.3 It is worth noting the following statement in the Guidance introduction:
- 5.4 "The guide is intended for building designers and their clients, consultants and planning officials. The advice given here is not mandatory and this document should not be seen as an instrument of planning policy. Its aim is to help rather than constrain the developer.
- 5.5 Although it gives numerical guidelines, these should be interpreted flexibly because natural lighting is only one of the many factors in site layout design.
- 5.6 The relevant BRE recommendations for daylight and sunlight are:
 - The Vertical Sky Component measured at the centre of a window should be no less than 27, or if reduced to below this, no less than 0.8 times the former value.
 - The window should receive at least 25% of available annual sunlight hours and more than 5% during the winter months (September 21st to March 21st), or, where this is not the case, 80% of its former value.

6.0 Window Schedules

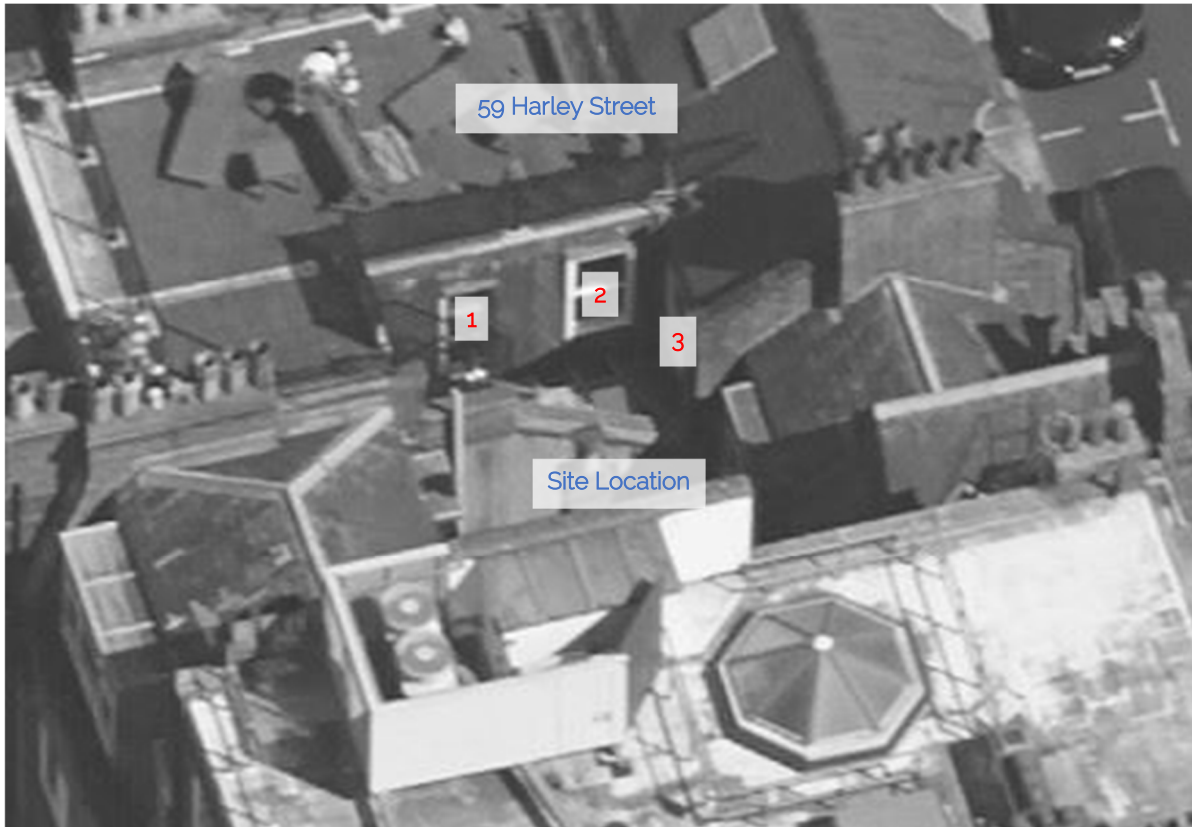

7.0 Daylight Impact Results – VSC Test

- 7.1 The Vertical Sky Component has been calculated for each of the 3 assessed windows for both the existing and proposed conditions.
- 7.2 As can be seen in the results below, all windows retain 80% of their current values.
- 7.3 The scheme is therefore compliant with BRE guidance for daylight impacts.

Vertical Sky Component				
Window	Existing VSC	Proposed VSC	% Retained	Meets BRE Guidance?
1	18.708	18.300	97.82%	Yes
2	19.333	18.917	97.84%	Yes
3	21.756	18.214	83.72%	Yes

8.0 Sunlight Impact Results

- 8.1 BRE guidance states that only windows which face within 90° of due south need be assessed for sunlight provision. In this instance, all 3 windows fall into this category.
- 8.2 The Probable Sunlight Hours have been calculated for this window for both the existing and proposed conditions using the methodology described previously, both over the whole year, and through the "winter months" (September 21st until March 21st)
- 8.3 The BRE guidance states that the sun lighting may be adversely affected if the centre of the window:
- Receives less than 25% of annual hours or less than 5% of winter hours and
 - Receives less than 80% of its current sunlight hours during either period and
 - Has a reduction in sunlight over the whole year greater than 4% of annual probable sunlight hours
- 8.4 It is clear from the wording of the above that all three clauses need to be met to qualify as an adverse impact. Thus, if the window does not meet any one of these criteria, the impact is acceptable.
- 8.5 The results below show that the assessed windows retain 80% of their existing values both annually and over the winter months.
- 8.6 The scheme is therefore compliant with BRE guidance in relation to sunlight impacts.

Window	Annual Sunlight Hours			Winter Sunlight Hours			Meets Guidance?
	Ex. Hrs Received (%)	Prop. Hrs Received	% Retained	Ex. Hrs Received	Prop. Hrs Received	% Retained	
1	40.402	39.640	98.11%	1.040	0.901	86.67%	Yes
2	44.352	43.520	98.13%	3.881	3.284	84.63%	Yes
3	37.353	31.287	83.76%	3.188	2.625	82.35%	Yes

9.0 Conclusions

- 9.1 Using industry standard methodology, we have made numerical analyses to ascertain the effects of the proposal at 57 Harley Street, London., and the levels of change in daylight and sunlight for the windows of the neighbouring property.
- 9.2 The main criteria used in this analysis to show compliance are the Vertical Sky Component for daylight impacts and Annual and Winter Probable Sunlight Hours for sunlight impacts
- 9.3 As has been shown, the effect on VSC is within the 80% guidance value for all of the assessed windows.
- 9.4 There will therefore be no adverse impact on neighbouring residents in terms of daylight.
- 9.5 In terms of sunlight, all of the assessed windows retain 80% of their existing values both annually and over the winter months.
- 9.6 The scheme is therefore compliant with BRE guidance in relation to sunlight impacts.
- 9.7 From a planning perspective therefore, it is the conclusion of this report that the proposed development is acceptable for planning, in daylight and sunlight terms.



T16 Design Ltd.

T: 01206 572452

E: info@t16design.com

W: www.t16design.com

© 2022