



# CellWeb TRP<sup>®</sup>



Tree Root Protection Guaranteed




Geosynthetics

[www.geosyn.co.uk](http://www.geosyn.co.uk)

# CellWeb TRP<sup>®</sup> System


## Tree Root Protection System

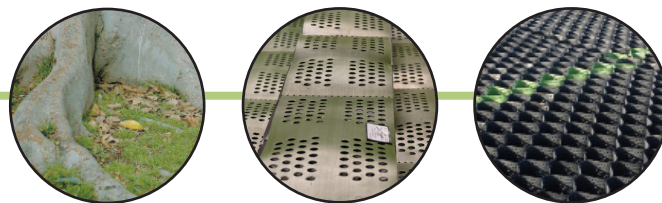

### The Consequences Of Tree Root Damage During Construction

It is an offence to cut down, lop, uproot, top, wilfully damage or destroy a protected tree without authorisation. Trees can be protected under the Town and Country Planning Act 1990 and the Town and Country Planning (Trees) Regulations 1999. Trees are protected when they are the subject of Tree Preservation Orders (T.P.O) or within Conservation Areas, subject to certain exemptions. Retention and protection of trees on development sites is also secured through the use of planning conditions.

On a construction site all trees with a Tree Preservation Orders need to be managed in accordance with BS5837 2012 (Trees in relation to construction); failure to comply with these orders can be a costly affair as many parties have discovered.

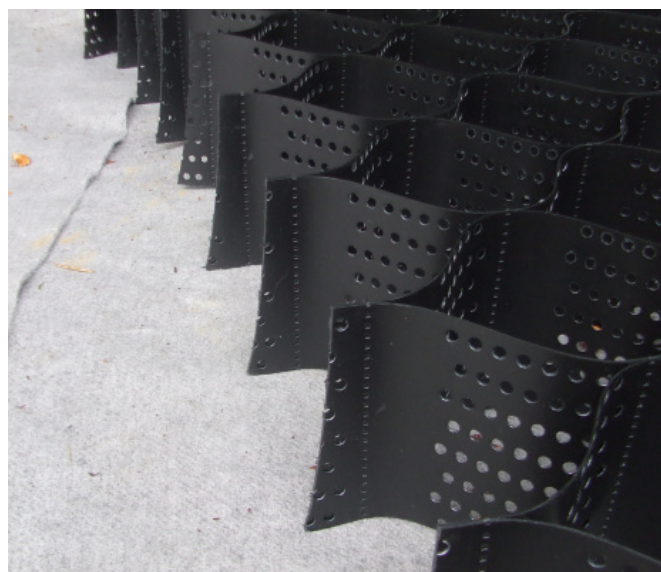

*Fishponds, Ketterton*

There are two offences which apply equally to trees protected by Tree Preservation Orders and those within Conservation Areas:

- Firstly, anyone who cuts down, uproots or wilfully destroys a tree, or who lops, tops or wilfully damages it in a way that is likely to destroy it is liable, if convicted in the Magistrates Court, to pay a fine of up to £20,000. If the person is committed for trial in the Crown Court, they are liable on conviction to an unlimited fine. The Courts have held that it is not necessary for a tree to be obliterated for it to be “destroyed” for the purposes of the legislation. It is sufficient for the tree to have been rendered useless as an amenity.
- Secondly, anyone who carries out works on a tree that are not likely to destroy it is liable, if convicted in the Magistrates Court, to a fine of up to £2,500. In addition to directly carrying out unauthorised works on protected trees, it is an offence to cause or permit such works.

Developers and building contractors are often completely unaware that ‘compaction of soils within the Root Protection Area (RPA)’ constitutes wilful damage to the tree. When vehicular or pedestrian access within the RPA is necessary, either for the construction operation or final site access, the effects of this activity must be addressed and the ground must be protected. When tracked or wheeled traffic movements are involved, the ground protection system should be designed by an engineer and take into account the loading involved.




*Shelton Road, Shewsbury*



# The Solution:

## Geosynthetics CellWeb TRP® System



## The Solution According to BS 5837:2012

“Appropriate sub-base options for new hard surfacing include three-dimensional cellular confinement systems .....

(BS 5837 2012 section 7.4.2 Note 1)

## The CellWeb TRP® Solution

CellWeb TRP® is the market leader in the United Kingdom and Ireland for tree root protection. CellWeb TRP® cellular confinement system protects tree roots from the damaging effects of compaction and desiccation, while creating a stable, load bearing surface for vehicular traffic. CellWeb TRP® complies with BS 5837:2012 and APN 12. It provides a no-dig solution, is tried and tested having been used successfully since 1998. It is the only tree root protection system which has been independently tested and it is the only tree root protection system which is guaranteed for 20 years. See page 6 for the full terms and conditions of the guarantee.



*Fishponds, Ketton*

## Field Trials

Geosynthetics Limited are the only company in the UK and Ireland to carry out live, completely independent field tests on the performance of a 3 dimensional cellular confinement system when used in a no-dig tree root protection system application. The results prove that CellWeb TRP® significantly reduces the compaction of sub-soils within the root growth limiting parameters established by K D Coder, 'Soil damage from compaction'. University of Georgia. July 2000. A copy of the report is available upon request.

## CellWeb TRP® Product Guarantee

Geosynthetics Limited prides itself on a providing a reliable, consistent service; including technical advice, on site support and installation guidance. Geosynthetics Limited provides a 20 year guarantee for the CellWeb TRP® tree root protection system. This guarantee gives the client, the tree officer and arboricultural consultant the confidence that the designed system will perform as intended without damaging the health of the tree.

See page 6 for the full terms and conditions of the guarantee.

# CellWeb TRP® System




## How the System Works

### How CellWeb TRP® Works

CellWeb TRP® is a cellular confinement system that confines aggregate materials and makes them stronger, thus increasing the bearing capacity of the sub base materials. Research shows that CellWeb TRP® acts as a stiff raft to distribute wheel loads and reduce their magnitude at the base of the construction, thus maintaining the soil bulk density at levels that are suitable for tree root growth.

CellWeb TRP® is used around the world to provide cost effective hard surface construction over tree roots and is the system of choice for Tree Officers and Arboriculturists. For more information on this subject see CellWeb TRP® Fact Sheet No 1.

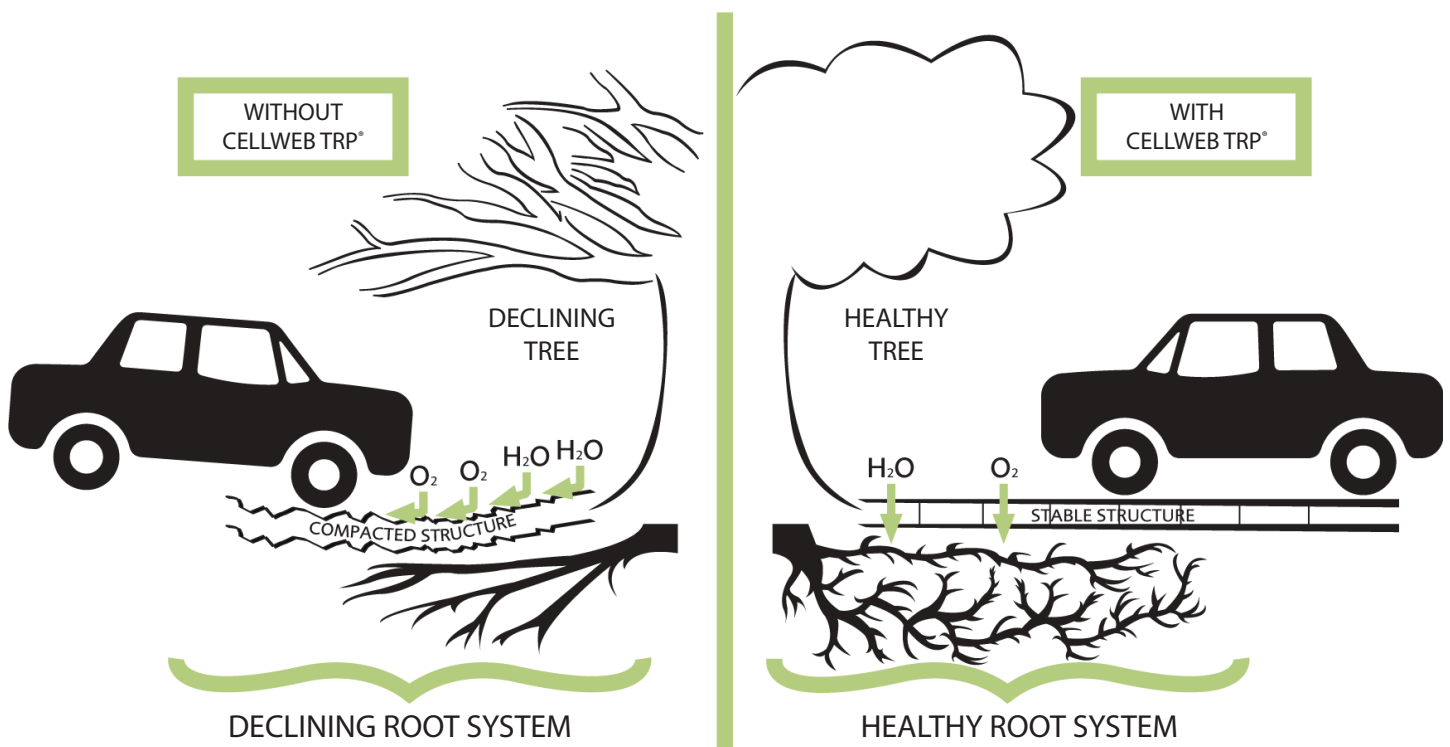


### Water and Oxygen Transfer Through the CellWeb TRP® System

The CellWeb TRP® system is constructed using open aggregate infill and CellWeb TRP® has perforated cell walls. The pore spaces between the aggregate particles are greater than 0.1mm in diameter. This open structure is far more permeable than typical soils and allows the free movement of water and oxygen so that supplies to trees are maintained.

For more information on this subject see CellWeb TRP® Fact Sheet No 2.

# CellWeb TRP® and Pollution



## How CellWeb TRP® Deals With Catastrophic Oil Spills

### How CellWeb TRP® Deals With Pollution

Where possible a permeable pavement system should always be constructed above the CellWeb TRP® system. The effective removal of pollution from runoff by permeable pavements is well known. Worldwide research has shown runoff that has passed through permeable pavements has low concentrations of pollutants.

Small spills of oil will be dealt with within the joints between the paving blocks and in the aggregate used within the system. However, large catastrophic spills are a different matter.

For more information on this subject see CellWeb TRP® Fact Sheet No 3.



Castle Gardens



Ambleside Lake District



Harcourt Aboretum

The Treetex® geotextile used in the CellWeb TRP® system has two functions. Treetex® separates the sub base aggregates from the soil beneath and it traps oil within its structure and allows it to degrade aerobically within the pavement construction. The structure, thickness and weight of Treetex® creates the perfect environment for this to happen. Most importantly tests prove that Treetex® will absorb 1.7 litres of oil per square metre, this is 4 times more effective than standard geotextiles.


Treetex® is an intrinsic part of the CellWeb TRP® system; and must be in conjunction with the CellWeb TRP® in order to guarantee the success of the system.

Please see page 6 for full details of the guarantee.



# Geosynthetics CellWeb TRP® System:


## A Proven No Dig Solution



### Advice, Design and Product Selection

Geosynthetics Limited has been supplying the CellWeb TRP® system since 1998 and has vast experience in its application. No two contracts are the same and we understand the factors that need to be taken into account to specify the correct CellWeb TRP® product.

We provide a free consultation, design and advisory service to find the solution that is most cost effective and beneficial for your site. Our service includes product selection, engineering calculations, CAD drawings and full instructions to help you from project conception to completion.

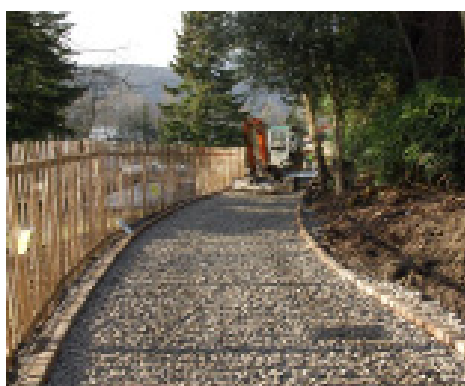

Fallbarrow Park, Windermere:  
Prior to CellWeb TRP® Installation



Fallbarrow Park, Windermere:  
CellWeb TRP® Installation



Fallbarrow Park, Windermere:  
Completed CellWeb TRP® Installation

### Final Surfacing

The benefits of the CellWeb TRP® system can only be maintained if a suitably porous final surface is selected. An ideal surfacing is the Golpla grass reinforcement and gravel retention system, a visually attractive surface that has the advantage of being fully porous. Alternatives include block paviors, porous asphalts and loose or bonded gravel.

### Always Use CellWeb TRP®

The CellWeb TRP® system is the only research backed system of its kind in the UK with a 100% success rate. CellWeb TRP® has been specifically developed for the Tree Root Protection market. The system is supported by 15 years of data and thousands of installations making it the system of choice for the majority of Tree Officers and Arboriculturists in the UK.

CellWeb TRP® is uniquely identifiable. It is manufactured with a bright green panel on each side. When installed the green panels are laid adjacent, creating a green band across the construction.



Woodcock Hall, Yorkshire

Copyright © 2012 Geosynthetics Limited

All reproduction or transmission of all or any part of this leaflet, whether by photocopying or storing in any medium by electronic means or otherwise, without the written permission of the owner, is prohibited.

## **Geosynthetics Limited**

Fleming Road, Harrowbrook Industrial Estate  
Hinckley, Leicestershire, LE10 3DU

Tel: 01455 617139 Fax: 01455 617140

Email: [sales@geosyn.co.uk](mailto:sales@geosyn.co.uk)

Web: [www.geosyn.co.uk](http://www.geosyn.co.uk)



Please call **01455 617 139**

or email [sales@geosyn.co.uk](mailto:sales@geosyn.co.uk) for more technical advice.

Visit our website [www.geosyn.co.uk](http://www.geosyn.co.uk) for further information.

This brochure is produced to give an example of the products we supply and how, subject to your own testing, our products may be used. Nothing in this brochure shall be construed so as to make any ascertain or give any warranty as to the fitness for purpose of any of our products in respect of any specific job. You should satisfy yourself through your own testing as to the suitability of our products for any specific purpose and rely solely on such testing and/or the advice of any professional(s) you commission. While we ensure as far as is possible that all information given in this brochure is accurate at the time of print, information and examples given in this brochure are by way of illustration only and nothing contained in this or any other promotional literature produced by us shall in any way constitute an offer or contract with you or shall be relied upon by you as a statement or representation of fact.