


# Gaelic

## Product Technical Information Sheet

Minimum roof pitch	30°
Headlap	75 mm
Batten spacing (fixed gauge) <sup>1</sup>	267 mm
Size of tile <sup>1</sup>	342 x 255 mm
Covering capacity	17.0 tiles per m <sup>2</sup>
Cover width	220 mm
Profile depth	43 mm
Hanging length	315 mm
Weight as laid	40.8 kg per m <sup>2</sup>
Weight per 1000 (including pallet & packaging)	2.577 tonnes
Weight per tile	2.4 kg
Weight per pallet (including pallet & packaging)	0.670 tonnes
Quantity per pallet	260
Quantity per row/band	Bottom: 43, centre: 43, top:44
Quantity per layer	Bottom: 86, centre: 86, top:88
Battens per m <sup>2</sup>	3.7 m
Batten size - up to 450 mm rafter centres	38 x 25mm
Batten size - up to 600 mm rafter centres	50 x 25mm
Nail size/type for tiles	50 x 3.35 mm aluminium ring shank clout head

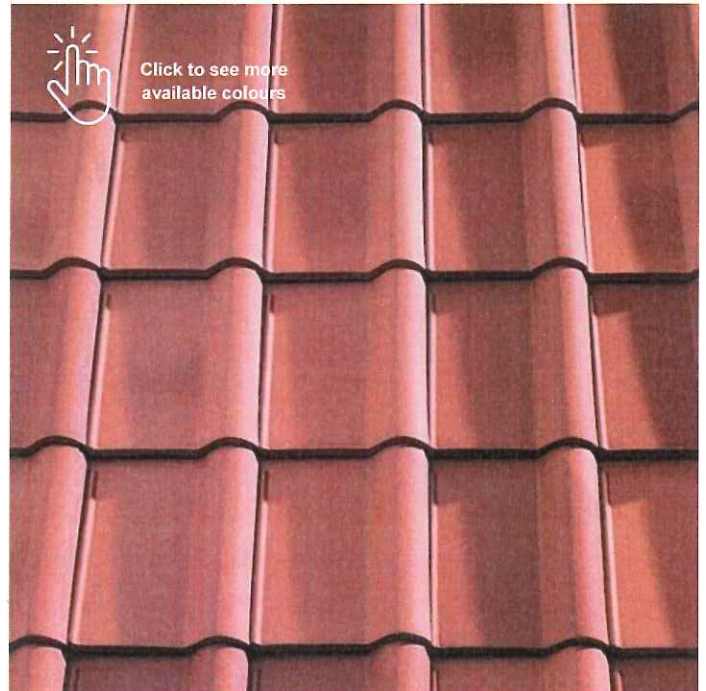

**BIM Objects Download**



<sup>1</sup>Clay tiles are subject to small variations in size because of drying and firing shrinkage in the manufacturing process. Before deciding on the batten gauge and linear coverage, the roof tiler should inspect each batch of tiles to ensure that the correct minimum headlap and sidelap are achieved. Unless otherwise stated, data is based on the tiles laid at minimum headlap.

**Tile Fixing** - Sandtoft roof tiles must be laid and fixed to comply with BS 5534: the British Standard Code of practice for slating and tiling, and BS 8000: Part 6: the British Standard Code of practice for workmanship on building sites. To ensure compliance with these Standards we strongly recommend that a calculated fixing specification be obtained from Sandtoft Technical Support or using Sandtoft's online FixSPEC tool at <https://roofspec.wienerberger.co.uk/FixSpec/Default.aspx>

Product specification is subject to change and will be updated accordingly. Date of this data sheet publication; 08/09/2020



1000+ products to choose from



Expert help and advice



Comprehensive Design Services



Technical Support