




Condition 6 Proposed

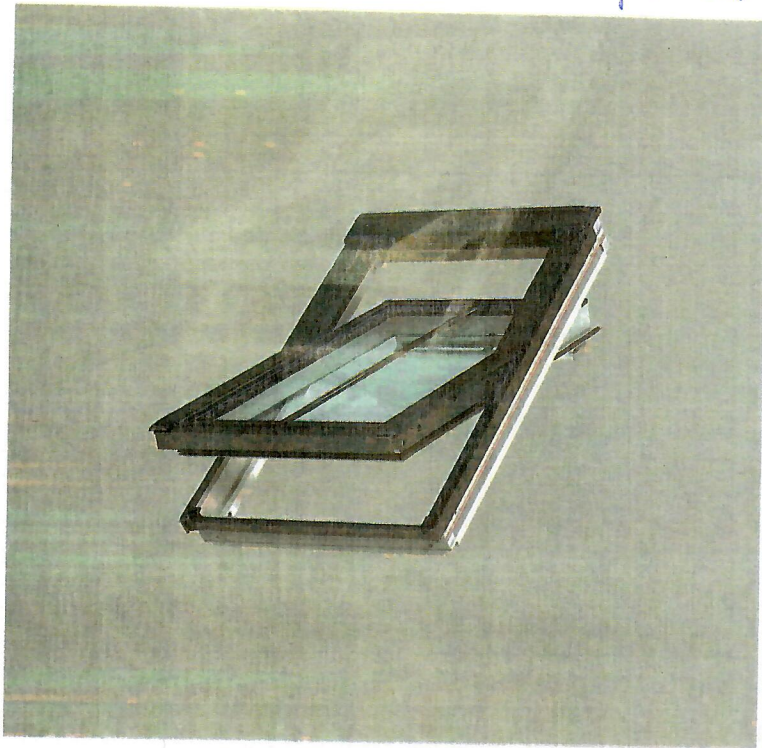

Roof pitch

Centre-pivot, top operated

Top-hung, bottom operated *



* The window is suitable for roof pitches between 15°-55°, also suitable for roof pitches between 55° and 75° with special springs.

Interior finish options



White painted
Bright white finish for modern interiors

Glazing options

	Double glazing --70
Rain noise reduction	✓
Safety lamination	✓
Toughened glass	✓
UV filter	✓
Easy-to-clean	
Anti-dew	
Thermal transmittance of glazing (U_g -value)	1.0

Read more about glazing specifications on p14.

Conservation

Conservation roof windows with glazing bar

Conservation roof windows are the perfect choice when planning dictates that a window of traditional external appearance is required. Its black exterior profiles and glazing bar blend seamlessly into the roof and match the original look of the building. It has the same technical features as a standard VELUX roof window.

- Available in both centre-pivot and top-hung
- RAL colour 9005

External frame sizes (w×h) cm

U_w -value CK04 CK06 FK06 MK06 MK08 UK04 LEAD TIME
W/m² K 55×98 55×118 66×118 78×118 78×140 134×98 GB NI
days



Centre-pivot white painted

Model	Description	U_w	CK04	CK06	FK06	MK06	MK08	UK04	GB	NI
GGL SD5N2	GGL 2570 roof window + EDN recessed flashing for slate up to 8mm thick (min 20°).	1.3	500	518	573	602	649	756	2	3
GGL SD5P2	GGL 2570 roof window + EDP flashing for plain tiles up to 14mm thick (min 25°).	1.3	442	459	510	536	579	676	2	3
GGL SD5W2	GGL 2570 roof window + EDW flashing for tiles up to 120mm in profile (min 15°).	1.3	442	459	510	536	579	676	2	3
GGL SD5J2	GGL 2570 roof window + EDJ recessed flashing for tiles up to 90mm in profile (min 20°).	1.3	500	518	573	602	649	756	2	3

Top-hung white painted

Model	Description	U_w	CK04	CK06	FK06	MK06	MK08	UK04	GB	NI
GPL SD5N2	GPL 2570 roof window + EDN recessed flashing for slate up to 8mm thick (min 20°).	1.3	-	-	-	-	788	-	2	3
GPL SD5P2	GPL 2570 roof window + EDP flashing for plain tiles up to 14mm thick (min 25°).	1.3	-	-	-	-	718	-	2	3
GPL SD5W2	GPL 2570 roof window + EDW flashing for tiles up to 120mm in profile (min 15°).	1.3	-	-	-	-	718	-	2	3
GPL SD5J2	GPL 2570 roof window + EDJ recessed flashing for tiles up to 90mm in profile (min 20°).	1.3	-	-	-	-	788	-	2	3

Delivery time is approximate in working days from receipt of an order placed before 4pm (UK) and 11.30am (NI).

All prices in GBP (£)
Find all sizes and prices on velux.co.uk

Other finishes