


Solid waste:
 solid waste from composting toilets removed and fed into tyre stacks to compost.
 2.4m2 concrete plinth at ground level with
 4.No car tyres per stack.

See Design statement submitted with application for further details

Existing Planting:
 Staked local tree species planting, currently 1 - 2m in height. Ongoing management programme to thin as required/ create tracks.

access path through trees to composting site

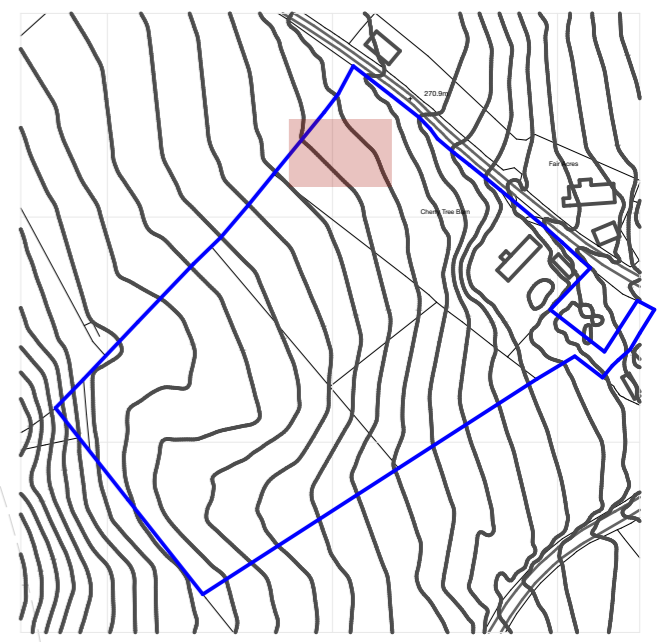

Proposed Site Plan - Composting site