
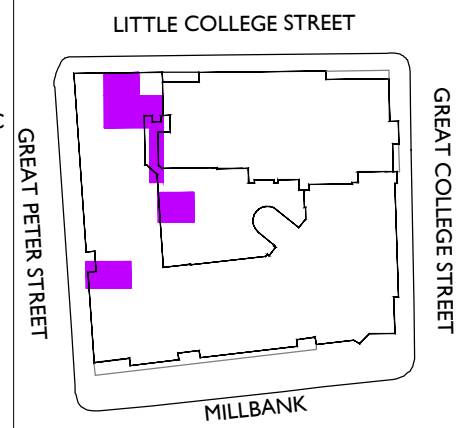


Notes: Drawings are based on survey data and may not accurately represent what is physically present. Do not scale from this drawing. All dimensions are to be verified on site before proceeding with the work. All dimensions are in millimeters unless noted otherwise. Purcell shall be notified in writing of any discrepancies.

Key Plan not to scale



- Floor slabs to be demolished and recast. Extend TBC depended on underpinning
- Walls to be modified at low level only. Extent of underpinning TBC
- Walls to be re-rendered or re-decorated to match existing
- Suspended ceilings to be temporarily taken down

| REV | DATE | DRAWN | DESCRIPTION |
|-----|------------|-------|--------------------|
| P02 | 05.05.2021 | GS | Scale bar included |

CLIENT
House of Commons

PROJECT
PoW: Millbank House: Flood alleviation

JOB NUMBER
240723

TITLE
**Basement Floor Plan
Pink Zone
2 – Restricted Access**

| SIZE | SCALE | LAST REVISED | DRAWN | CHECKED |
|------|-------|--------------|-------|---------|
| A3L | 1:75 | 05/05/2021 | JC | GS |

REV SUITABILITY/REASON FOR ISSUE
P02 S4 - Listed Building Consent

DRAWING NAME
00MBH-C2255-PUR91-B1-A-AR-DR-01003

B-07

PINK ZONE

Floors

1. Slab demolition to areas 13006, 13525 and 63108 as shown and as per Str Eng details. Protect adjacent wall to prevent unnecessary damage.
2. Upon completion of the underground works reinstate new concrete floor slab to match existing concrete materiality and finish.
3. New slab tanking/damp proofing generally as NBS Clause J35.
4. To Room 13006 (Store), provide 100% new ceramic floor tiles and coved skirting to match existing.
5. To Room 13525 (Male Changing Room), provide 100% new vinyl floor covering and coved former at abutment walls to match existing.

Walls

6. Protect adjacent walls during slab demolition to prevent unnecessary damage.
7. To Room 13006 (Store), re-decorate 100% walls with two coats with Dulux Trade Diamond Emulsion matt (exposed previously painted brick).
8. To Room 13525 (Male Changing Room) remove existing metal stud walls and door/frame/architrave complete to allow slab demolition. Store doorset safely on site. Upon completion of underground works provide new metal stud/plasterboard partition walls to match original configuration and install salvaged doorset. Skim and redecorate all sides of walls as shown on the drawings.
9. To Room 63108 (lightwell), reinstate concrete plinth to match existing if removed as part of the slab demolition works and make good any damage to rendered walls.
11. New pipework is to generally be run within existing openings or to be floor or wall mounted. Core drilling through masonry walls to be kept at a minimum and agreed prior to forming any openings.

Ceilings

12. Take down area of suspended ceiling grid panels and accessories as necessary to facilitate the installation of pipework within ceiling voids. (Only take down the necessary amount to suit installation of new services).
13. New pipework is generally to be run within existing opening. Core drilling through masonry walls shall be kept to a minimum and agreed prior to forming any new openings.
14. Reinstall ceiling grid and accessories upon completion of services installation. Renew any damaged ceiling panels to match existing.

