



Mezzanine Floor in 202mm Posi Joists at 600mm crs max.


PS1- 3 no. 1-ply 15 kg

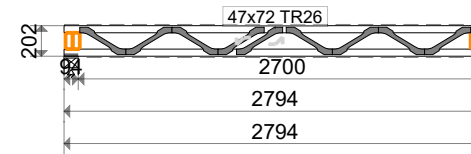


PS2- 1 no. 1-ply 15 kg

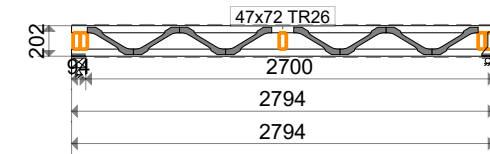


PS3- 5 no. 1-ply 11 kg

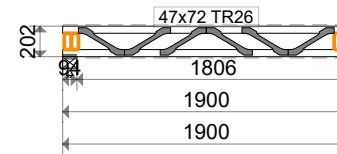


PS4G- 1 no. 2-ply 41 kg

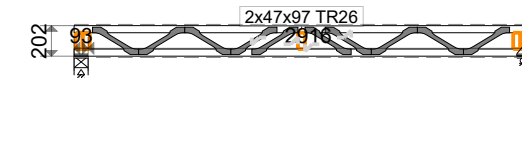

PS5G- 1 no. 2-ply 29 kg

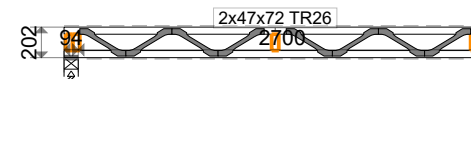

PS6- 1 no. 1-ply 11 kg

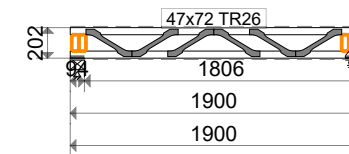

Component Schedule

PS1 - 2794 mm - 3 no.
 PS2 - 2794 mm - 1 no.
 PS3 - 1900 mm - 5 no.
 PS4 - 3009 mm - 1 no. 2-ply
 PS5 - 2794 mm - 1 no. 2-ply
 PS6 - 1900 mm - 1 no.

Rim Boards 47x197mm 1/5400 2/3000 1/700

Glu-Lam Floor Beam 140x315 1/5300

Carpenters Metalwork

UH195/75 Hangers 10no.
 HUH198/195 Hanger 1no.
 MHE500/150 1no.
 M12x125 Coach Screws 6no.
 TS50 Hangers 2no.
 3.7x32 ST Nails 500no.

Floor Decking Pack

22mm Egger Protect Sheets 600x2400 12no.
 1 litre bottles of Waterproof D4 Deck adhesive

**DESIGN APPROVED FOR
 MANUFACTURE.**
 September 28th, 2020

		Jane Thompson	
		Home Office Roof Structure	
DRAWN/CONSTR. BY PA	CHECKED	JOB NO. P00293	PMA31128
28/09/2020 - 21:04 8.1 SR2 (5c54f5c)	28/09/2020	CODE TYPE NO.	SCALE 1:50 Page 1/1 DRAWING NUMBER REV.