


SECTION 1-1
SCALE 1 : 25 @ A1

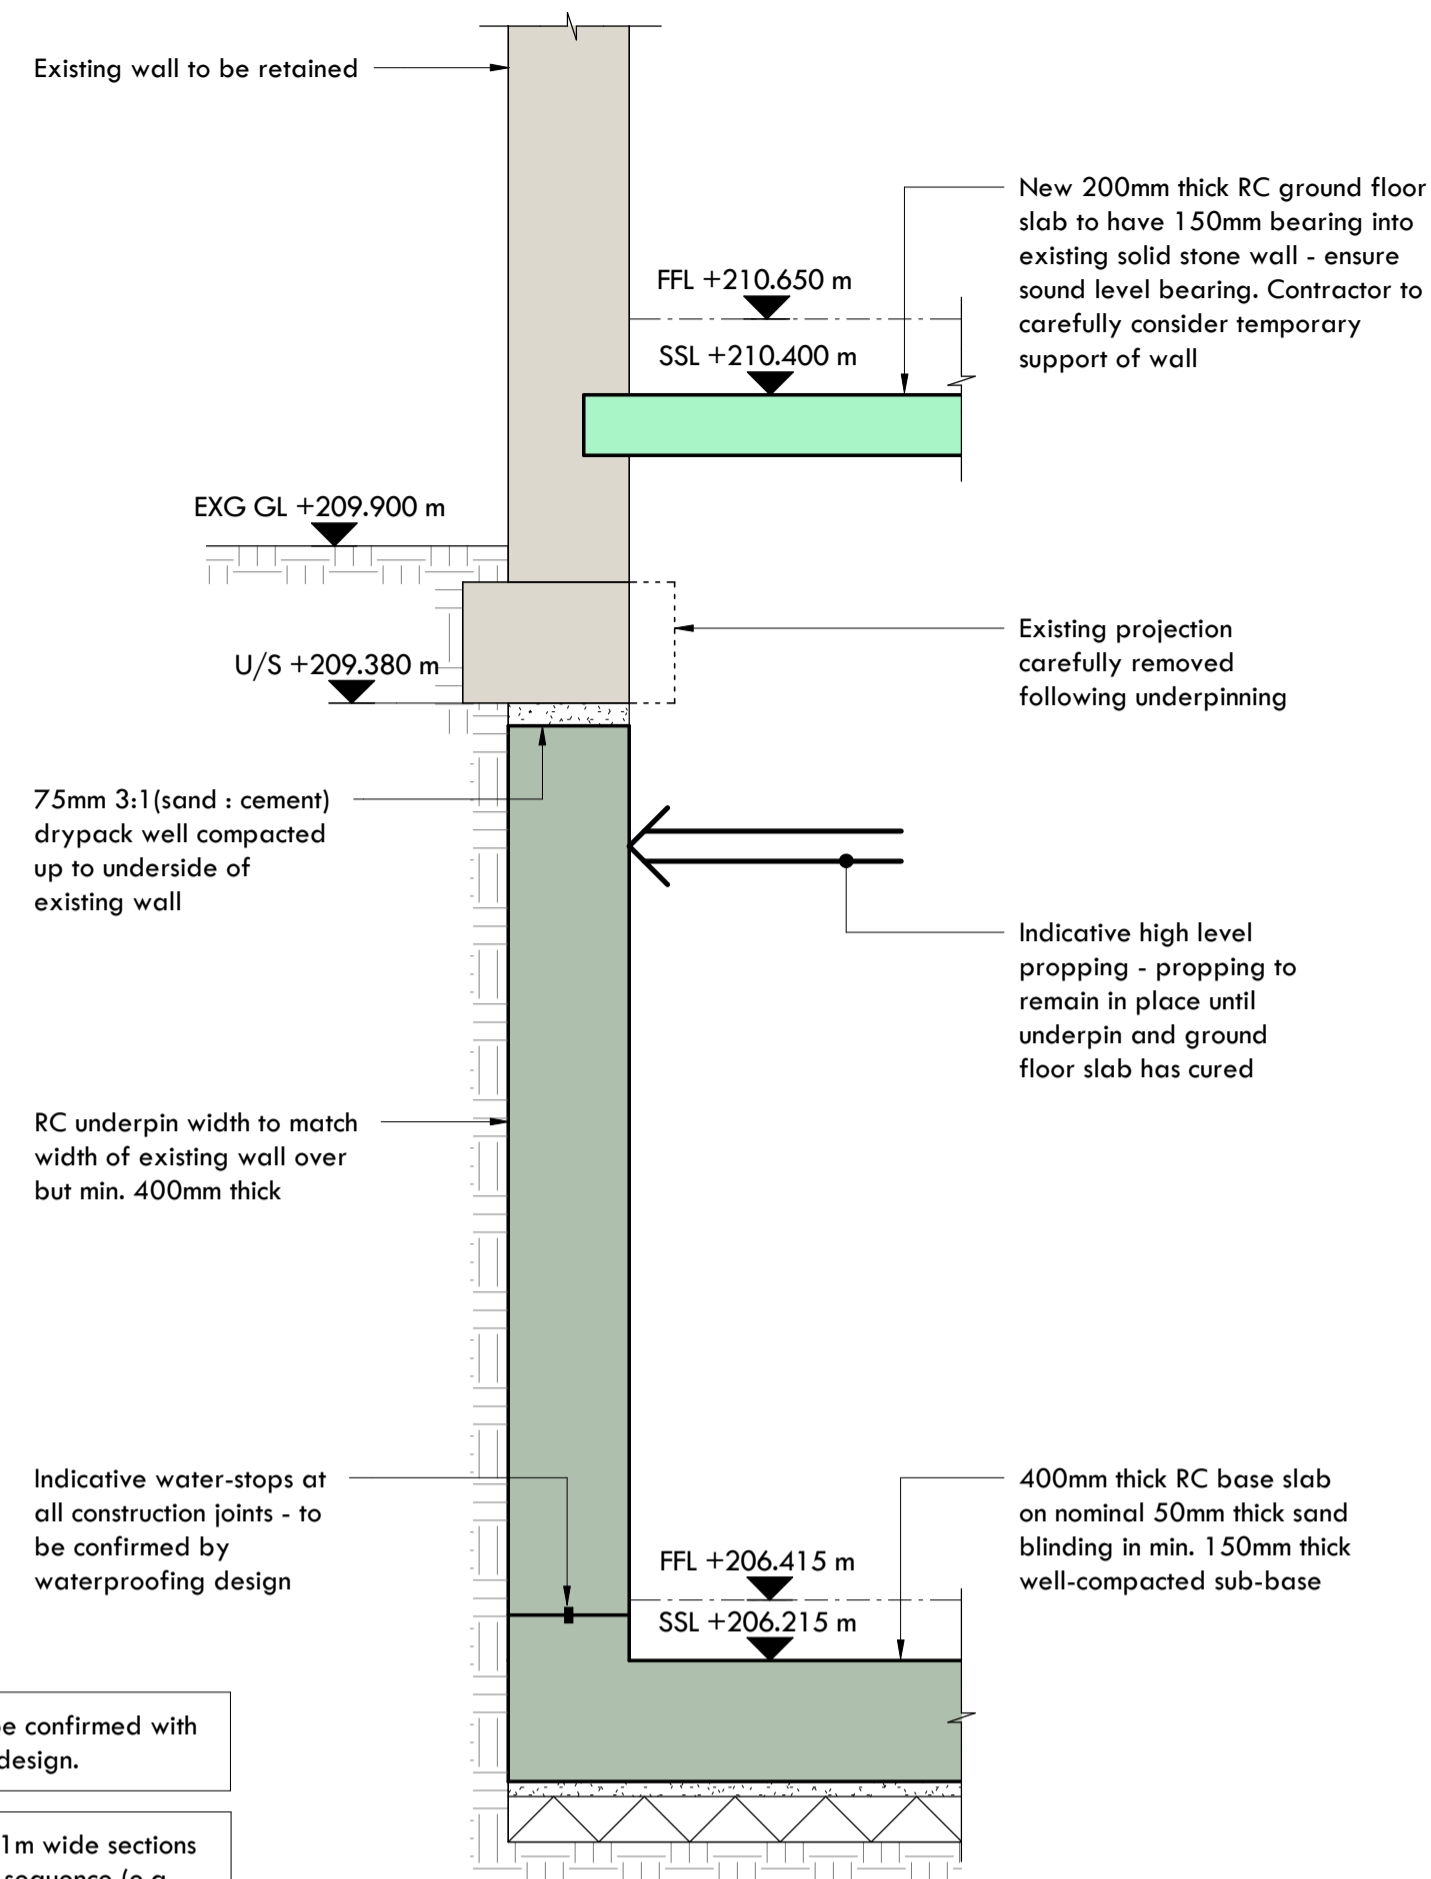

SECTION 2-2
SCALE 1 : 25 @ A1

All levels approximate - to be confirmed with Architect following detailed design.

Underpins to be cast in max 1m wide sections in a traditional underpinning sequence (e.g. 1-3-5-2-4) to be confirmed by the Contractor and reviewed by the Structural Engineer. Contractor to carefully consider the method and sequence of excavation and the temporary propping required to ensure the structure remains stable throughout the works

GENERAL NOTES

1. For planning purposes only
2. This drawing is to be read in conjunction with all other structural drawings and the structural specification.
3. This drawing is to be read in conjunction with all other relevant disciplines drawings and specifications.
4. All levels, setting out, waterproofing and fireproofing to be confirmed with the Architect.
5. The Contractor is responsible for the temporary stability of the existing and proposed structure throughout the works. The sequencing and method of installation should be carefully considered and the temporary works should be designed and detailed by a suitably qualified person (appointed by the Contractor) prior to commencing the works.
6. Contractor to request splices if required for handling purposes.

NOT FOR CONSTRUCTION

P1	Issued for information and comment.	KK	AA	16.04.21
REV	DESCRIPTION	DRN	CHK	DATE



Studio 2, One Eastfield Avenue, London SW18 1PG
 T: 020 8191 8888
 E: info@structuraldesignstudio.co.uk
 W: www.structuraldesignstudio.co.uk

Project
Middle Lypiatt Grange
 Stroud, GL6 7LW

Drawing Title
Basement Tunnel Details - Sheet 1

Date April 2021	Scale 1 : 25@A1	Drawn KK
Drawing Status Preliminary		
Project Number 221018	Drawing Number S/2300	Revision P1