

Our Heritage 2800 system is outstanding in performance and great looks, with an unbeatable choice of colour from stock. It is best in class for energy and security, achieving U-values as low as 0.9 W/m²K and PAS24 accreditation. The unique design of this system also ensures unrivalled wind resistance, water tightness and air permeability.

Its' elegance and symmetry makes Heritage 2800 the most attractive system on the market, complementing modern and period properties alike. It leads with 30 colourways in stock, complete with matching trims, cills and ancillaries.



Deceuninck Limited

Heritage 2800 | www.deceuninck.co.uk



Weather Performance


The Heritage 2800 multi-functional weatherseal is at the cutting edge of modern design and material technology. The unique design ensures unrivalled weather performance and provides a significant reduction in the everyday strain placed on hardware, which in turn increases the lifespan of the window. The weatherseal is also welded at the corners providing a continuous seal further improving the insulating properties of the product.

Security

The Heritage 2800 window and door system is fully compatible with all standard security hardware, with both windows and doors achieving enhanced security standard PAS 24.

Insulation

The Heritage 2800 window and door system far exceeds all requirements of not only today's Building Regulations but also future revisions.

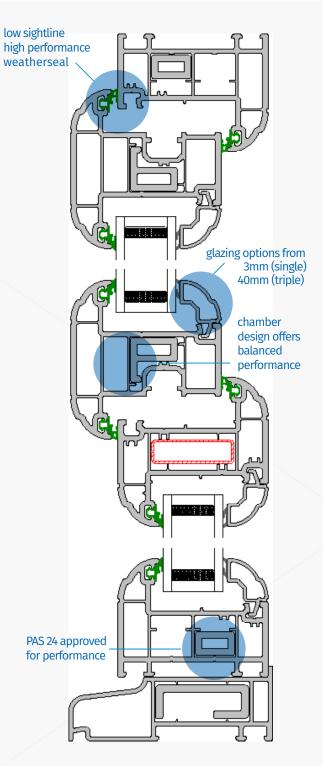




Deceuninck Limited

Weather test results

		Top Hung Casement	Side Hung Casement
	Size Tested	1.2m x 1.5m	0.9m x 1.4m
Air Permeability	Class	A4	A4
	Rating	600 Pa	600 Pa
Water tightness	Class	9A	9A
	Rating	E1050 Pa	E1050 Pa
Wind Resistance	Class	A5	A5
	Rating	2000 Pa	2000 Pa





U-Values

4/20/4 Argon Cavity		4/14/4/14/4 Argon Cavity		
U _g 1.219	U _g 1.070	U _g 0.683	U _g 0.591	
U _w 1.4	U _w 1.3	U _w 0.98	U _w 0.91	

Energy Window Peccurinck Ltd Heritagy 2800 Storm Casement A++ A+ A+ A B C D E Reg. No.: 5083 SC003 Review Date: 31/12/2018 Please visit www.bfrc.org to check the validity of this licence. The latel not a fathody regiment. It is earliest plain profiled as a cathour review in aftering contents.

WER's

4/20/4 Argon Cavity 4/14/4/14/4 Argon Cavity
A+ 12 A++ 22



Deceuninck Limited

Heritage 2800 | www.deceuninck.co.uk











30 COLOURWAYS IN STOCK



GREY ALUMINIUM / WHITE PVC



BLACK SMOOTH MATT / WHITE PVC



BLACK ASH / WHITE PVC



BLACK ASH BOTH SIDES



ANTHRACITE SMOOTH MATT / WHITE PVC



ANTHRACITE SMOOTH MATT BOTH SIDES



ANTHRACITE GRAINED / WHITE PVC



ANTHRACITE GRAINED BOTH SIDES



ROSEWOOD / WHITE



ROSEWOOD **BOTH SIDES**



NUT TREE /



NUT TREE BOTH SIDES



GOLDEN OAK / WHITE PVC



GOLDEN OAK **BOTH SIDES**



IRISH OAK /



IRISH OAK BOTH SIDES



CHARTWELL GREEN / WHITE PVC



CHARTWELL GREEN BOTH SIDES



CLASSIC CREAM / WHITE PVC

AGATE GREY /

HERITAGE WHITE



HERITAGE WHITE

WHITE PVC

WHITE GRAIN /



WHITE GRAIN **BOTH SIDES**





HERITAGE WHITE



ENGLISH OAK BOTH SIDES





ICE CREAM / HERITAGE WHITE



HERITAGE WHITE BOTH SIDES









A unique range of woodgrain foil colours in 30 colourways in stock, complete with matching ancillaries, trims and accessories.

- Beautiful authentic 'wood like' finish
- Extremely durable
- 10 year manufacturer's guarantee
- Each colour has its own matching ancillaries, trims and accessories
- Available from stock





Deceuninck Limited

Stanier Road • Porte Marsh Industrial Estate • Calne • Wiltshire SN11 9PX T 01249 816 969 • F 01249 815 234

deceuninck.ltd@deceuninck.com • www.deceuninck.co.uk

January 2020 Document No: 82122-8104 V.2 Heritage 2800