



- Key**
- Stonework replacement
  - Stucco repair
  - Brick Replacement
  - Existing fabric to be removed
  - Repointing:  
Generally 70% repoint overall, Mortar to be sand : lime mix, exact specification to be agreed with local planning authority
  - Replacement W40 double glazed casement window
- elevation      plan

**Schedule of Works**

- |     |  |     |  |
|-----|--|-----|--|
| N1  | Existing fire escape stairs refurbished and window openings reformed   | N13 | Construct new boundary wall from site reclaimed bricks - lime /sand mortar Mix TBA with local planning authority |
| N2  | Reinstate existing rainwater hoppers to new roof gutters and new cast iron rain water pipes                                | N14 | Unblock arch and install new double glazed windows   |
| N3  | Form new opening   | N15 | New roof lights  |
| N4  | Structural fault - remedial work to be agreed with structural engineer   | N16 | Check, clean, repair and repaint tie bar ends  |
| N5  | Reinstate terracotta vent  | N17 | New galvanised steel ramp and steps. See landscape architect's proposals   |
| N6  | Install new automatic steel security gates   | N18 | -New-in-situ-concrete-portal-frame-  |
| N7  | New roof membrane and balasted insulation over   | N19 | Waste stack removed and window openings behind reinstated  |
| N8  | Terne coated steel cased termination boxes to apartment ventilation and extract  | N20 | Courtyard re-levelled, setts taken up and re-used as required. See landscape architect's proposals               |
| N9  | New secondary floor (nom. 210mm above SSL) 'Acousti-floor' or similar approved sound separation with timber boarded finish | N21 | Louvre door with concealed frame. Finish to match window frames  |
| N10 | Raised floor to corridor with all shared water and electricity distribution  |     |  |
| N11 | Existing floor strengthening retained, cleaned and decorated   |     |  |
| N12 | Install new W40 double glazed doors  |     |  |


EXISTING MASONRY TO BE CLEANED INCLUDING THE REMOVAL OF PAINT, BITUMEN, MORTAR, etc.

**hoddler+partners**  
SQI Studios  
1 Kelso Place  
Manchester M15 4LE

t: +44(0)161 832 9842  
e: mail@hoddlerandpartners.com  
w: www.hoddlerandpartners.com

revisions + notes:  
REV. P3 07/05/2021 PLANNING ISSUE

DO NOT SCALE  
Work to annotated dimensions only.  
Read drawing in conjunction with relevant specification,  
Structural Engineers' and Services Engineers' drawings.  
Confirm all dimensions before commencement of any  
work on site or fabrication.

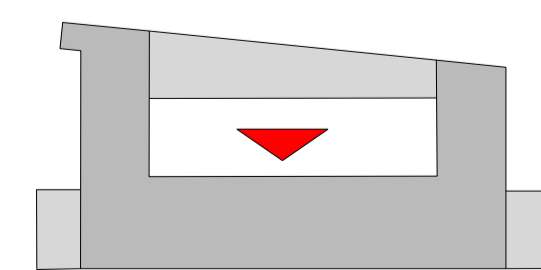

client: MARYLAND SECURITIES  
date: FEBRUARY 2021

project: BRUNSWICK MILL DEVELOPMENT  
scale: 1:100 @A1  
drawn by: TG

title: EXISTING MILL PROPOSED SOUTH EAST FACING COURTYARD ELEVATION  
drawing number: L(-)436

status: PLANNING  
job number: 0586  
revision: P3

hoddler+partners