

**MARVIN**   
Windows and Doors  
Built around you.®

2020



MARVIN WINDOW & DOOR  
COLLECTION





## MARVIN ARCHITECTURAL'S UNMATCHED SERVICES

Marvin offers Bespoke Window and Door solutions for both replacement, refurbishment and new-build projects.

From energy-saving to sustainable windows or niche in-house services, such as replacing windows in a conservation area, Marvin is here to offer you the full turn-key package.

Design, supply and installation, we'll find the right solution for your window and door investment.

## OUR PROJECT SOLUTIONS & IN-HOUSE CAPABILITIES

Tailored solutions built around you:

- Project conception and consultation
- Detail analysis of construction documents and specifications
- Project management
- In-house architectural design & installation

Each building project is different and with several thousand projects completed by the Marvin Architectural team over the past 20 years we know what unique means.

## ENDLESS PREMIUM WINDOW & DOOR DESIGN POSSIBILITIES

Marvin Scenic Patio Doors // Batts Hall, Warwickshire



**CONSIDER YOUR MATERIALS**

MARVIN AND INTEGRITY OFFER THREE DISTINCT MATERIAL TYPES, EACH WITH THEIR OWN UNIQUE QUALITIES.



**MARVIN WOOD PRODUCTS**

Nothing beats the beauty or the versatility of our wood windows and doors. Choose from a selection of species available as both an interior or exterior material.

**MARVIN EXTRUDED ALUMINIUM - CLAD PRODUCTS**

We clad the exterior of our wood windows with a tough and durable extruded aluminium featuring a commercial-grade finish designed to stand up to the elements and maintain its beauty.







## A MORE COMFORTABLE INTERIOR, REGARDLESS OF THE SEASON

Retain heat inside your home during the cooler winter and block out the sun's rays during the warmer summer with smart double or triple glazing technology. The Low E coating is specially designed to take advantage of the angle of the winter and summer sun. Winter sun is absorbed and conducted indoors. Summer sun is filtered and reflected back outdoors.

Marvin Round Top Sliding Sash Windows // Royal Pavilion, Poundbury


## CHOOSE YOUR WINDOW

START WITH YOUR CURRENT TYPE. THEN CONSIDER HOW IT FUNCTIONS OR FITS WITHIN YOUR SPACE TO DECIDE IF YOU'RE READY FOR SOMETHING DIFFERENT.




### SLIDING SASH WINDOW

Both the top and bottom sash move for multiple venting options and tilt in for easy cleaning. Also available as a single hung where the top sash is stationary.

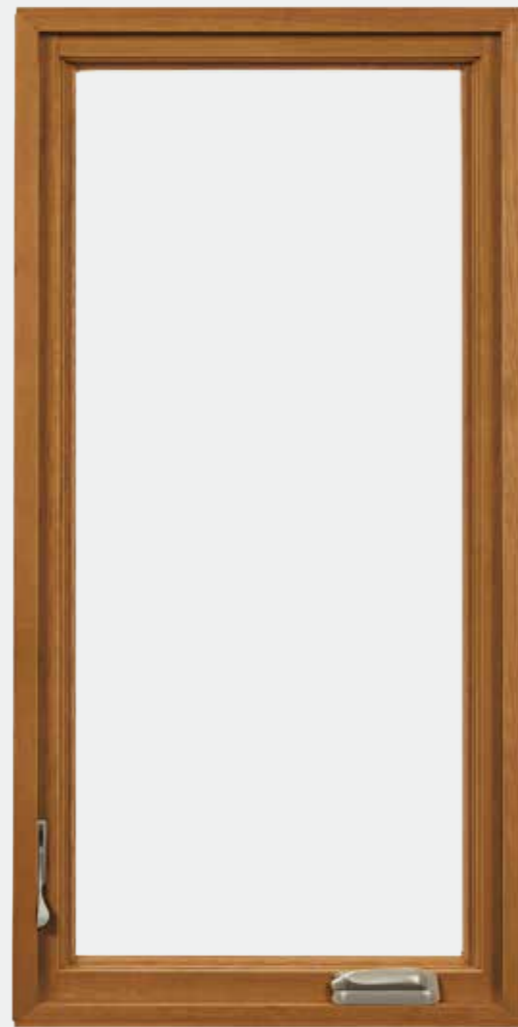

### CASEMENT WINDOW

Hinged on either side to open like a door. Choose crank out or push out.

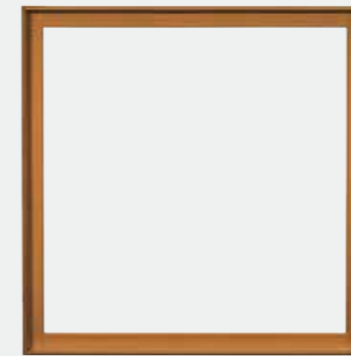


### PICTURE WINDOW

Large window that doesn't open, frequently chosen to complement windows that do open. Venting options are available.



### ROUND TOP WINDOW

Choose a rounded or arched top on stationary, sliding sash, or casement windows for a stylistic twist.

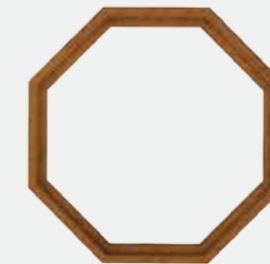

### SPECIALTY SHAPE

Fully customized to fit a unique opening or style. Some styles open, but shaped windows are often stationary.



### AWNING WINDOW

Hinged on the top of the frame and swings outward from the bottom.



### GLIDER

Has a sash that glides to the left or right. It can also feature a large center picture window with two side windows that open, or two center windows that slide apart to create a pass-through.



### BOW AND BAY

A series of windows joined together in a curve or angle. Bow windows create a more gradual arc with more than three windows. A bay window typically features three windows and has a head and seat board.

## SELECT YOUR DOOR

UPGRADE YOUR HOME WITH A NEW STATEMENT PIECE.



### SLIDING PATIO DOORS

One or more opening panels glide effortlessly on a track. Available in combinations with up to four panels.



### SWINGING PATIO DOORS

One or two door panels open, swinging in or out. Available in single panel or in combinations of up to four panels.



### SCENIC

Expansive sizes and large panes of glass for seamless indoor/outdoor living and uninterrupted views. Choose from Lift and Slide, Multi-Slide and Bi-Fold variations.



### DESIGN WITH GLAZING BARS

YOU CAN STYLIZE ANY WINDOW OR DOOR BY ADDING GLAZING BARS, SOMETIMES CALLED GRIDS OR GRILLES. CHOOSE FROM OUR EXTENSIVE SELECTION OF PATTERNS, OR CUSTOMISE SOMETHING ENTIRELY NEW.





**ELEGANCE EVERYDAY: NARROW PROFILES  
MAXIMISE NATURAL LIGHT INTO YOUR HOME**

Marvin Sliding Sash Windows // Ealing, London

# MARVIN SLIDING SASH WINDOWS

## INTERIOR PRODUCT FEATURES

### DESIGNED TO INSPIRE

1

#### RICH WOOD INTERIOR

Offers beauty and warmth with six standard wood species and ten interior finish options.

2

#### NARROW CHECKRAIL

Provides a sleek aesthetic to maximise daylight opening while maintaining historical accuracy.

3

#### DESIGN VERSATILITY

With an array of simulated glazing bar patterns, interior and exterior colour options, ten hardware finishes, and hundreds of roundtop sizes.

4

#### EXCLUSIVE AUTOLOCK

Activates when the sashes are closed, locking the window.

5

#### FIRST-RATE ENERGY EFFICIENCY

Meet CE® standards in energy efficiency with multiple glass options for various regions, climates and weather needs.

6

#### SASH BALANCE SYSTEMS

Enable smooth operation even at the largest sizes.



## EXTERIOR PRODUCT FEATURES

### ENGINEERED FOR PERFORMANCE

7

#### DURABLE EXTERIOR CLADDING

Made with the industry's highest level of certification, AAMA 2605, extruded aluminium and backed by a 10-year warranty against chalking and fading.

8

#### ALUMINIUM INTER-LOCK

Eliminates drafts and improves the window's overall structural integrity.

9

#### EXPANSIVE SIZES

Larger than 5 feet wide by 10 feet high.

10

#### TRADITIONAL SILL BEVEL

The 14-degree bevel provides optimal water management while maintaining a classic look.

11

#### SUPERIOR WEATHER PERFORMANCE

The window's performance ratings are top in class, with LC-PG50 on most sizes and optional commercial (CW) performance and IZ3 certified coastal performance on most sizes.

*Left window shown in Cherry with Wheat stain and Antique Brass hardware.*

*Right window shown in Suede aluminum cladding.*





Unique  
Sliding Sash  
Wash-Mode



# MARVIN CASEMENT & AWNING WINDOWS

---



## **BIGGEST OPERATING SIZES**

The most glass for the most view. Tallest casement: 36" x 102". Widest casement: 44" x 91 1/8". Tallest awning: 48" x 96". Widest awning: 96" x 48 1/8".

## **UNMATCHED PERFORMANCE**

The industry's largest wood-clad casement and awning windows offer industry-leading performance, up to a LC-PG40 rating. Most casement sizes up to 36" x 96" or 40" x 92" are rated CW-PG50. Many mull configurations are AAMA 450 certified.

## **SMOOTH OPERATION**

Custom high-performance gearing and a hinge bar that can carry up to 150 lbs of sash weight allow for smooth, effortless operation.

## **CONCEALED MULTI-POINT LOCKS**

Activated from one, easy to operate location, multi-point locks enhance performance. The concealed lock system doesn't detract from the window aesthetics.



# REVOLUTIONARY WASH MODE

WASHING WINDOWS IS NO LONGER A CHORE

---



Our Ultimate Casement Windows operate in a way so revolutionary that we've patented it, making Marvin® the only place to find it. The innovative hardware allows access to both sides of the glass from the inside of your home, making window washing stress and ladder free.

- Allows access to both sides of the glass from inside the home
- Features patented, innovative hardware
- Unrivaled convenience
- Exclusive to Marvin Casement products
- No ladder required



PREMIUM CRAFTSMANSHIP: NATURAL TIMBER  
OFFERS TEXTURE, WARMTH & CHARACTER

Marvin Casement Windows // Middlesex, London



Antique Brass  
Crank-Handle





Low Maintenance  
Aluminium  
Cladding Exterior

Sloped Cill Directs  
Water Away

16mm Slim Profile  
Glazing Bars

Maintain  
Historical Accuracy

Consistent  
Sightlines

**ALUMINIUM CLAD WOOD: STRIKING THE  
PERFECT BALANCE OF BEAUTY & DURABILITY**  
Marvin Sliding Sash Windows & French Patio Doors // Surrey



# MARVIN FRENCH PATIO DOORS



## FEATURES

- Available in Inswing, Outswing and Arch Top design options
- Available in two, three and four panel configurations in sizes up to CN 14080
- LC-PG50 performance grade rating
- Meet or exceed CE qualifications
- Traditional design with wide stiles and tall bottom rails
- Raised or flat panel option available for design flexibility
- Adjustable hinges keep the door operating smoothly for years
- Square or Ogee interior profile options
- Numerous standard size options and custom capabilities available
- Ultrex® fiberglass sill for improved thermal performance and smooth operation
- Exclusive ergonomic handle and two-point locking system for extra security available in ten finish options
- Numerous architectural hardware options available
- 19 clad colour options that meet AAMA 2605
- 6 high quality wood options that are FSC certified
- Optional interior shades available in 15 colour options

## ULTIMATE SWINGING FRENCH DOOR HARDWARE



SATIN TAUPE

Swinging French Door hardware available in 10 finishes including: Satin Taupe, White, Dark Bronze, Satin Chrome, Polished Chrome, Antique Brass, Oil Rubbed Bronze, Oil Rubbed Bronze<sup>PVD</sup>, Brass<sup>PVD</sup> and Satin Nickel<sup>PVD</sup>



Built around you.®

©2015 Marvin® Windows and Doors. All rights reserved. ®Registered trademark of Marvin Windows and Doors. ENERGY STAR® and the ENERGY STAR certification mark are registered U.S. marks. Part #19980798. May 2015.





# MARVIN SLIDING FRENCH DOORS



## FEATURES

- Available in two, three and four panel configurations in sizes up to CN 16080
- LC-PG40 performance grade rating
- Meet or exceed CE qualifications
- Traditional design with wide stiles and tall bottom rails
- Raised or flat panel option available for design flexibility
- Square or Ogee interior profile options
- Exclusive ergonomic handle and two-point locking system for extra security available in ten finish options
- Numerous architectural hardware options available
- Numerous standard size options and custom capabilities available
- Ultrex® fiberglass sill for improved thermal performance and smooth operation
- Low-profile, ADA compliant sill option for Universal Design
- 19 clad colour options that meet AAMA 2605
- 6 high quality wood options that are FSC certified
- Optional interior shades available in 15 colour options

## ULTIMATE SLIDING FRENCH DOOR HARDWARE



SATIN TAUPE

Sliding French Door hardware available in 10 finishes including: Satin Taupe, White, Dark Bronze, Satin Chrome, Polished Chrome, Antique Brass, Oil Rubbed Bronze, Oil Rubbed Bronze<sup>PVD</sup>, Brass<sup>PVD</sup> and Satin Nickel<sup>PVD</sup>

©2015 Marvin® Windows and Doors. All rights reserved. ®Registered trademark of Marvin Windows and Doors. ENERGY STAR® and the ENERGY STAR certification mark are registered U.S. marks. Part #19980799. May 2015.



Built around you.®



# CLAD COLOURS

DISCOVER A WIDE VARIETY OF BEAUTIFUL OPTIONS

Deep, rich and lasting are words that describe the difference of Marvin® colour. From subtle earth tones to bold, attention-grabbing hues, to brilliant pearlescent tones, our cladding stands out as much for its beauty as it does for its legendary durability.

Marvin's low-maintenance, clad-wood products feature an extruded aluminium exterior, finished in commercial-grade paint for superior resistance to fading and chalking. Finish strong with long-lasting color, backed by a 10-year warranty.\*

## AAMA 2605: THE HIGHEST INDUSTRY STANDARD

Not all AAMA 2605 finishes are created equal. The industry standard now allows the 2605 rating for roll-form (coil) aluminium. But there's a difference. Our substantially stronger, impact resistant extruded aluminium material – standard on all our cladding components – is about the thickness of a quarter. Roll-form aluminium, used by some window manufacturers for components, is almost as thin as a soda can.



Note: Printed color may not be an accurate representation. Ask your local Marvin retailer for color chips.

CLAD COLORS

*Evergreen*

*Hampton Sage*

*Cascade Blue*

*Gunmetal*

*Cadet Gray*

*Bright Silver  
(Pearlescent)*

*Stone White*

*Sierra White*

*Coconut Cream*

*Cashmere*

*Clay*

*Pebble Gray*

*Suede*

*Copper  
(Pearlescent)*

*Wineberry*

*Bronze*

*Liberty Bronze  
(Pearlescent)*

*Bahama Brown*

*Ebony*



# WINDOW HARDWARE

QUALITY YOU CAN FEEL

Marvin® Windows and Doors' durable and elegant hardware is engineered to work seamlessly and to harmonize with any décor. Choose a finish to complement your architectural style. Matte Black, Satin Taupe, Bronze and White are painted finishes. These durable finishes mimic the look of metal and present a practical alternative. Satin Nickel, Brass, Antique Brass, Polished Chrome, Oil Rubbed Bronze, and Satin Chrome and offer the rich appearance and durability of authentic metal finishes.

## WINDOW HARDWARE FINISHES



MATTE BLACK



SATIN TAUPE



BRONZE



WHITE



SATIN NICKEL



BRASS



ANTIQUE BRASS



POLISHED CHROME



OIL RUBBED BRONZE



SATIN CHROME



### AUTO-LOCKING HARDWARE SYSTEM

Ultimate Double Hung  
Next Generation

MATTE BLACK • SATIN TAUPE • WHITE  
SATIN NICKEL • BRASS • SATIN CHROME  
ANTIQUÉ BRASS • BRONZE  
OIL RUBBED BRONZE • POLISHED CHROME



### TRADITIONAL LIFT LOCK

Ultimate Single Hung  
Next Generation

MATTE BLACK • SATIN TAUPE • WHITE  
SATIN NICKEL • BRASS • SATIN CHROME  
ANTIQUÉ BRASS • BRONZE  
OIL RUBBED BRONZE • POLISHED CHROME



### CONTEMPORARY LIFT LOCK

Ultimate Single Hung  
Next Generation

MATTE BLACK • SATIN TAUPE • WHITE  
SATIN NICKEL • BRASS • SATIN CHROME  
ANTIQUÉ BRASS • BRONZE  
OIL RUBBED BRONZE • POLISHED CHROME



### SASH LOCK\*

Tilt Pac

SATIN TAUPE • BRONZE • BRASS • WHITE



### FOLDING HANDLE

Ultimate Casement, Ultimate Replacement Casement, Contemporary Casement, Ultimate Awning, Ultimate Replacement Awning, Contemporary Awning

MATTE BLACK • SATIN TAUPE • WHITE  
SATIN NICKEL • BRASS • SATIN CHROME  
ANTIQUÉ BRASS • BRONZE • OIL RUBBED BRONZE



### CRANK HANDLE

Ultimate Casement, Ultimate Replacement Casement, Contemporary Casement, Ultimate Awning, Ultimate Replacement Awning, Contemporary Awning

SATIN TAUPE • BRONZE • BRASS • WHITE



### PUSH OUT HANDLE\*\*

Ultimate Push Out Casement and Replacement Casement, Ultimate Push Out Awning and Replacement Awning

SATIN NICKEL • ANTIQUÉ BRASS  
OIL RUBBED BRONZE • BRASS



### HANDLE

Tilt Turn (Key option available†)  
BRONZE • SATIN CHROME • BRASS • WHITE



### FOLDING HANDLE

Glider  
MATTE BLACK • SATIN TAUPE • WHITE  
SATIN NICKEL • BRASS • SATIN CHROME  
ANTIQUÉ BRASS • BRONZE • OIL RUBBED BRONZE

\* Also available as keyed sash lock in Satin Taupe, Bronze or White.

\*\* Satin Taupe not available, Oil Rubbed Bronze is standard.

† Key option available in Bronze and White.



# DOOR HARDWARE

EVERY DETAIL SAYS "WELCOME"

Deceptively sturdy, Marvin® Windows and Doors' hardware looks too beautiful to stand up to everyday use. Despite the graceful curves, ergonomic design and elegant finishes, this door hardware is engineered for durability. Satin Nickel, Brass and Oil Rubbed Bronze finishes are available with a PVD finish. The Physical Vapor Deposition (PVD) process adds a layer of toughness to hardware exposed to environmental factors like direct sun and humidity. PVD finishes resist fading and discoloration, even in coastal areas.

## DOOR HARDWARE FINISHES




MATTE BLACK



SATIN TAUPE



DARK BRONZE



WHITE



SATIN NICKEL <sup>PVD</sup>



BRASS <sup>PVD</sup>



OIL RUBBED BRONZE <sup>PVD</sup>



OIL RUBBED BRONZE



ANTIQUE BRASS



POLISHED CHROME



SATIN CHROME



### TRADITIONAL SWINGING FRENCH HANDLE

AVAILABLE FINISHES:  
MATTE BLACK • SATIN TAUPE • DARK BRONZE  
WHITE • ANTIQUE BRASS • SATIN CHROME  
OIL RUBBED BRONZE • POLISHED CHROME

PVD FINISHES:  
SATIN NICKEL • BRASS • OIL RUBBED BRONZE



### TRADITIONAL SLIDING FRENCH HANDLE

AVAILABLE FINISHES:  
MATTE BLACK • SATIN TAUPE • DARK BRONZE  
WHITE • ANTIQUE BRASS • SATIN CHROME  
OIL RUBBED BRONZE • POLISHED CHROME

PVD FINISHES:  
SATIN NICKEL • BRASS • OIL RUBBED BRONZE



### TRADITIONAL SLIDING PATIO HANDLE

AVAILABLE FINISHES:  
MATTE BLACK • SATIN TAUPE • DARK BRONZE  
WHITE • ANTIQUE BRASS • SATIN CHROME  
OIL RUBBED BRONZE • POLISHED CHROME

PVD FINISHES:  
SATIN NICKEL • BRASS • OIL RUBBED BRONZE



### CONTEMPORARY SLIDING HANDLE

AVAILABLE FINISHES:  
MATTE BLACK • DARK BRONZE

PVD FINISHES:  
SATIN NICKEL • OIL RUBBED BRONZE



### CONTEMPORARY SWINGING HANDLE

AVAILABLE FINISHES:  
MATTE BLACK • DARK BRONZE

PVD FINISHES:  
SATIN NICKEL • OIL RUBBED BRONZE



### ADJUSTABLE HINGE

AVAILABLE FINISHES:  
MATTE BLACK • SATIN TAUPE • DARK BRONZE  
WHITE • ANTIQUE BRASS • SATIN CHROME  
OIL RUBBED BRONZE • GOLDTONE • SILVER FROST

PVD FINISHES:  
SATIN NICKEL • BRASS • OIL RUBBED BRONZE





**BEAUTY THAT NEVER FADES: SUPERIOR RESISTANCE TO CHALKING AND FADING**

Marvin Sliding Sash Windows // Sovereign Court, London

**WARRANTY & QUALITY CERTIFICATIONS**

Marvin's robust extensive 10 year warranty is our promise to you that your new window and door investment will look and function as expected.

Unlike other companies, Marvin warrant both our products and professional installation for 10 years.

Your Extensive 10 Year Warranty Includes:

- 10 Years Protection Against Product Manufacturing Defects.
- 10 Years Protection Against Glass Condensation.
- 10 Years After-Service Coverage Including Making Good.



**INDEPENDENTLY THIRD-PARTY TESTED**

Each Window & Door Range from Marvin Architectural is backed by world wide renowned independent third party certifications and are provided with a declaration of performance.

Every Marvin product is CE certified as standard. It is important that your new windows and doors are independently tested for performance to ensure you are getting the true benefit from your investment.





# CONTACT US

---

## Marvin Showroom

Unit 1, Prov. Ind. Est.,  
Pump Lane,  
Hayes,  
UB3 3NE,  
United Kingdom

## Get In Touch With Us

0208 569 8222  
sales@marvinUK.com  
[www.marvin-architectural.co.uk](http://www.marvin-architectural.co.uk)

**MARVIN** 

Windows and Doors

Built around you.®