



Email: sales@fueltankshop.co.uk

Sales: 01643704328

oil tanks

Home Products Heating Oil Bunded Oil Tanks 1000 Litre Bunded

1000 LITRE BUNDED OIL TANK



Product Ref: FTS1000



Volume: 1000ltr

Weight: 116.000kg

Dimensions: L:1960mm W:635mm H:1382mm

Footprint (L+W): 1810mm x 605mm



DELIVERY IN 3-5 WORKING DAYS APPROX

Please note 48 hour delivery is not available in post code exclusion zones (Please see below)

HOME DELIVERY

United Kingdom mainland delivery from **FREE** ex VAT

FREE TAIL LIFT Delivery (for most tanks under 2500 litres) - Lowers tank to ground level to assist in off-loading (AB, BT DD, EH, FK, G, GY, HS, IM, IV, JE, KA, KW, KY, ML, PA20+ & PH, PO30+, ZE)

CHECK DELIVERY COST

CHOOSE 48 HOUR DELIVERY

Required (Order by 12pm) £25.00	Not Required
---------------------------------	--------------

③ Short Flue Extension Greenstar 220mm

Part Number : U0103010

Flue for the boiler, coming out of wall



Description

Worcester Greenstar 220mm Short Flue Extension 7716191133

Features and Benefits:

- Length when fitted: 220mm
- Diameter: 100mm
- White finish

3



**NATIONAL
VENTILATION**

Vent coming out of external wall
Manufacturers & suppliers
of  monsoon products *No 2.*

Monsoon JMEV 100

Continuous Mechanical Extract Ventilation Fans



- High efficiency with low SFPs
- Full adjustable normal and boost airflow settings
- Available with integral humidistat
- IPX5 rated for zone 1 installations
- UKAS accredited air flow sensor, easy commissioning
- Display showing airflow and system pressure
- UK manufactured

Call now to find out more: 01823 690 290

www.nationalventilation.co.uk Email: info@nvagroup.co.uk

3

VENT


CODE	DESCRIPTION
MON-DMEV100	Continuous running fan 100mm
MON-DMEV100HT	Continuous running fan with humidistat 100mm

The Monsoon dMEV range of continuous mechanical extract ventilation fans, incorporate a high-pressure axial impeller, which offers near silent operation, as low as 13dB(A).

Designed to be a perfect fit within kitchens, utility rooms, and bathrooms, with a switched live connection or humidistat to control the boost speed.

Fully adjustable airflow with 1l/s increments, allows for easy installation and commissioning, with the integrated UKAS calibrated airflow sensor, you can be confident that it will work as intended.

Performance

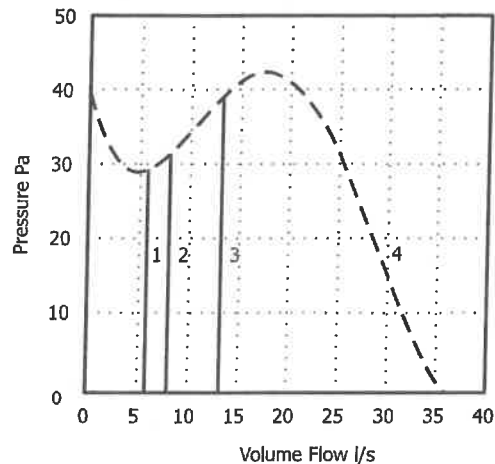

- 1 6l/s Constant Volume
- 2 8l/s Constant Volume
- 3 13l/s Constant Volume
- 4 Maximum pressure available to deliver airflow


Fan technical data

FAN MOTOR	EXTRACT CAPACITY	TRICKLE dB(A) @ 3M	IP RATING
1W on trickle, 8.3W on boost	Trickle	14	IPX5

Performance data

TRICKLE LOW	TRICKLE HIGH	BOOST
5l/s	15l/s	35l/s

Dimensions (mm)

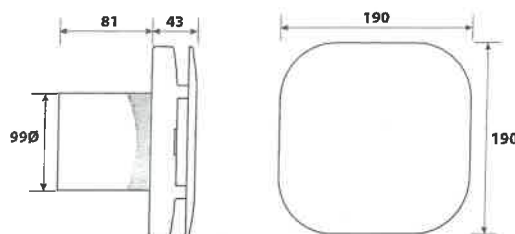

Hole diameters (mm):

WALLS	CEILINGS	WINDOWS
107	107	117

Call now to find out more: 01823 690 290

www.nationalventilation.co.uk Email: info@nvagroup.co.uk