

EXTERNAL EXTENSION WALLS - BRICK CAVITY WALL CONSTRUCTION

New external walls to be constructed below ground level in Tarmac Durox Foundation Blocks foundation blocks complying with BS 6073-2:2008 and BS EN 1996-2:2006 to full width of wall over. **Compressive strength of 7.3 N mm².**

External cavity walls above ground level to be 1 no. internal leaf of Tarmac Toplight 100mm Blockwork 7.3 N mm² with 125mm cavity, partially filled with Kingspan Kooltherm K108 cavity board, **75mm** thick, taped on the joints, secured with retaining clips and cut to return at all window openings. Ensure there are no gaps between the insulation boards, with external leaf of 102.5mm brick to match with existing. All precast units to in accordance with BS EN 15435:2008 and BS 6073-2:2008. **To achieve 0.18 W/m²K.**

Internally finished with 12.5mm Gyproc plasterboard with dri wall adhesive to British Gypsum's specification. Fit with tapered joints and a skim finish.

To be finished down to finished floor with a 2 coat 15mm Carlite plasterwork in accordance with BS EN 15435:2008 and BS 6073-2:2008.

New walls to be joined to existing with a stainless steel wall starter system.


Stainless steel wall vertical twist type (with retaining clips) to be provided and fixed at 450mm centres vertically and 750mm centres horizontally staggered, reduced to 225mm to reveals; all to B.S. 1243.

Additional ties to be provided at jamb openings at 300mm centres. To be installed in accordance with manufacturer's recommendations.

Provide suitable Thermabate insulated cavity closers to all external window and door openings. Installed in accordance with manufacturer's recommendations. Close all cavities at roof level and around window openings.

External cavity wall openings to have proprietary insulated stainless steel IG, Catnic or similar approved lintels to suit span of openings between 1200mm and 2000mm with 150mm minimum end bearing. To be installed as per Engineers design and in accordance with manufacturers specifications. Provide horizontal polyethylene DPC's of appropriate width sited minimum 150mm above FGL to all walls and polyethylene cavity trays to window cills, door thresholds and above external lintels to window and door openings, to extend 50mm minimum beyond ends of lintel or the reveal cavity closer. Cavities to extend a minimum of 150mm below the DPC. Cavity trays to have weep holes at 400mm centres.

All work to comply with Part A Building Regulations Document.

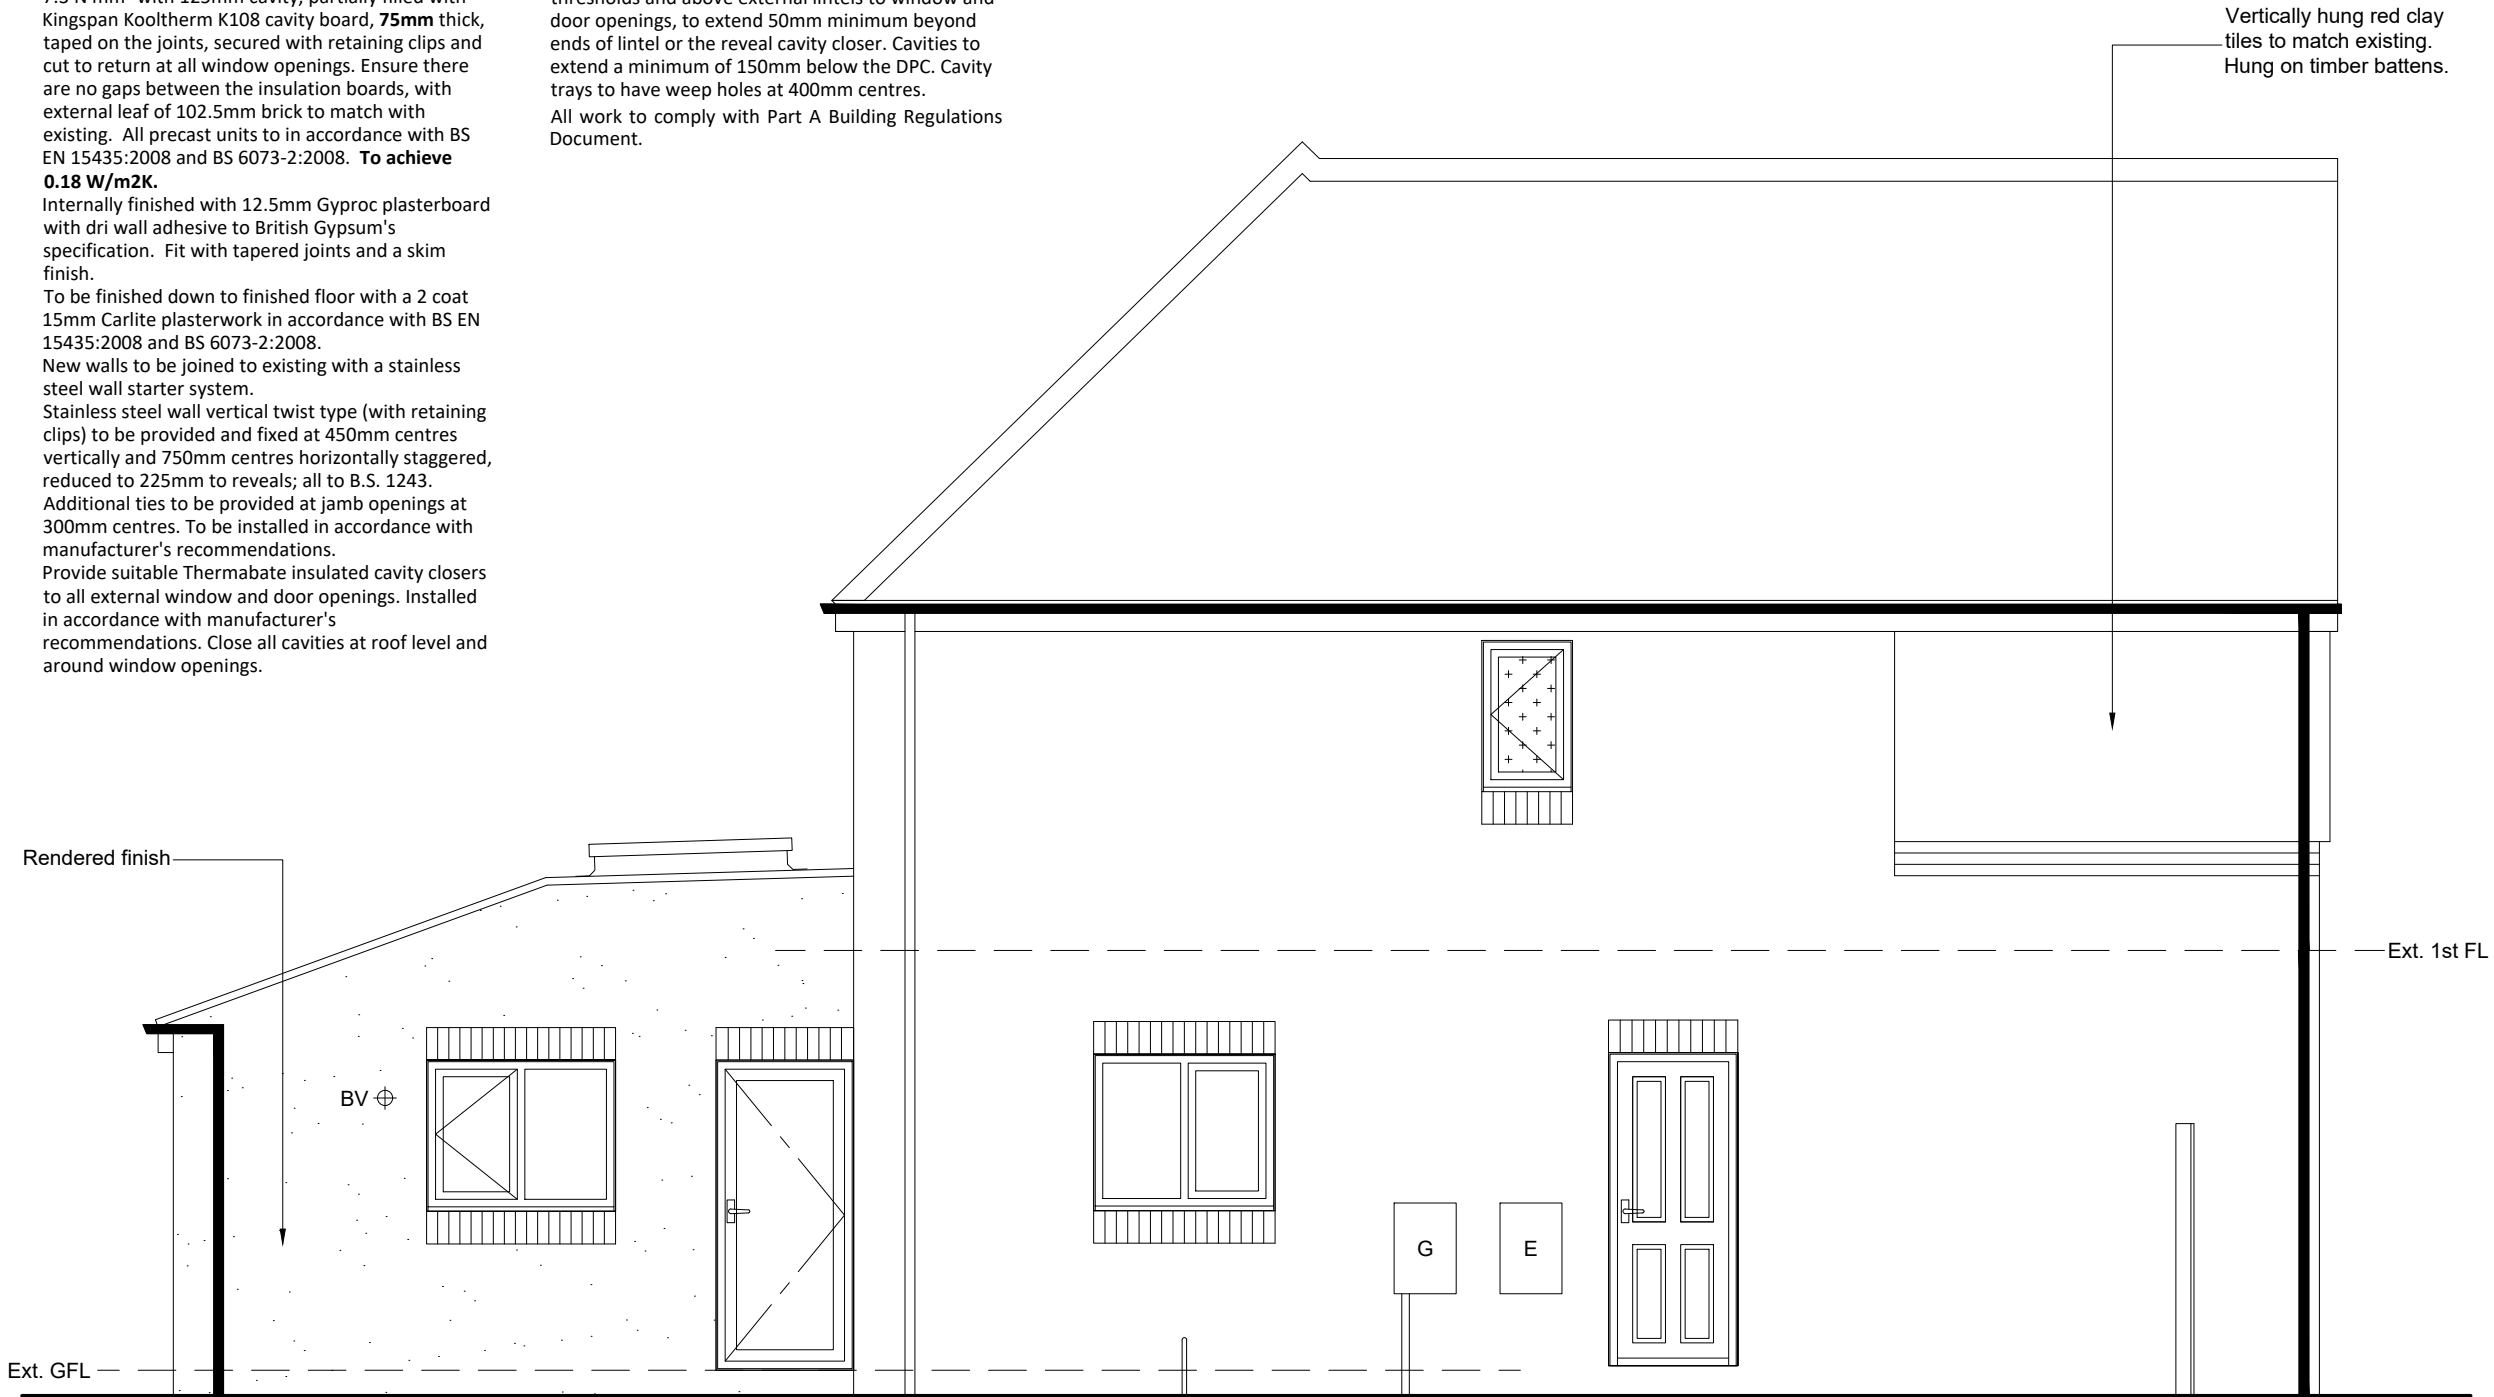

PROPOSED SIDE ELEVATION

NOTE:
CONTRACTOR TO VERIFY ALL SIZES ON SITE BEFORE COMMENCEMENT.

NOTE:
PLEASE DO NOT SCALE FROM THIS DRAWING.

Party Wall Act
Notices under the Party Wall Act are to be served by the building owner or appropriate body appointed by the building owner. For further clarification on the Party Wall etc Act 1996 contact: Cairn Wharf Consultancy Ltd, 2 Boroughgate, Off Bay Horse Court, Otley, LS21 1SB M 07739 576181 cw@cairnwharf.com For further information on the Party Wall etc Act 1996: <http://www.communities.gov.uk/documents/planningandbuilding/pdf/133214.pdf>

Building Contract
It is recommended that a formal written agreement is put in place between the building owner and the building contractor. A typical agreement that protects both owner and builder would be produced by the JCT. For further information on building contracts contact: Cairn Wharf Consultancy Ltd, 2 Boroughgate, Off Bay Horse Court, Otley, LS21 1SB M 07739 576181 cw@cairnwharf.com

CDM 2015 Regulations
The Construction (Design and Management) Regulations 2015 applies to all construction work. Designers, builders and Clients all have duties under the regulations. For further information on the CDM 2015 Regulations contact: Cairn Wharf Consultancy Ltd, 2 Boroughgate, Off Bay Horse Court, Otley, LS21 1SB M 07739 576181 cw@cairnwharf.com

GENERAL NOTES
Materials to match existing.

These notes do not comprise a full specification. The drawings are for building regulation purposes only and are not working plans. They do not comprise of a complete specification for the whole of the works. Their primary function is to assist the local authority inspector to determine compliance in line with building regulation standards.

Where further clarifications are required contractor shall refer to the client for details and instruction.

All dimensions must be checked by the contractor and any discrepancies noted in writing to MAS Design Consultants Ltd.

All works must be carried out in accordance with current Building Regulations, Codes of Practice and Planning Officers requirements.

All materials must comply with current British Standards in situations used.

REV

01943878398

www.masdesignconsultants.com
1 Oxford Street, Guiseley, Leeds, LS20 9AX

PROPOSED

EXTENT OF PROJECT:
PROPOSAL: PROPOSED SINGLE STOREY REAR EXTENSION; FORMING UTILITY AND OPEN PLAN KITCHEN / DINING / FAMILY AREA. PROPOSED FIRST FLOOR FRONT EXTENSION; FORMING BEDROOM. NEW ROOF OVER ENTRANCE. RENDER FINISH TO REAR ELEVATION.

CLIENT DETAILS:
**MRS S DON,
14 ACORN WAY,
POOL IN WHARFEDALE, OTLEY.
LS21 1TY.**

DRAWING TITLE:
PROPOSED SIDE ELEVATION.

PAPER	SCALE	DATE	DRAWING No	REV
A3	1:50	04/23	M4023/04/204	.