


CYCLONE

STEEL BUILDINGS


Brackets and Base Fixings

Our frames are fully bolted together: All brackets and base fixings are fully galvanised and predrilled, ready for assembly. This feature makes installation simpler, reduces the potential for human error and is consequently less labour-intensive to install. All framing components are bolted.

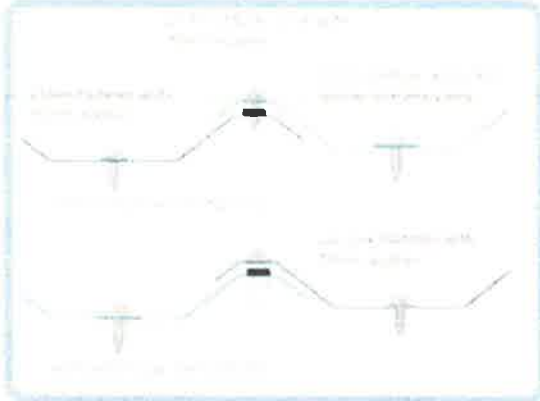

Fixings

Fixings for roof profiles provide restraint against wind uplift forces; those for wall profiles provide restraint and support. Whilst profiles may be fixed through valleys or crowns, we recommend valley fixing: accurate fixing is easier to achieve, loads on the fixings are smaller, the fixings are less likely to distort the profile, and better compression of the sealant is achieved at end laps.

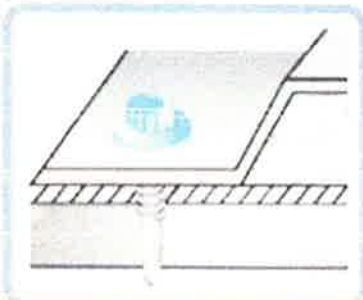

Colortite Screws

The integration of the durable Drillitite SD Stainless steel fasteners with the Colortite nylon moulded head produces a fastener with exceptional resistance to weather and corrosion.



Rooflights

Rooflights can be supplied to meet project requirements for light transmission, durability, non-fragility rating, fire resistance and thermal performance. In an insulated building the rooflights are double or triple skinned and do not compromise security.



PA Doors

Our secure steel doors are designed to integrate perfectly with our steel cladding systems. There are two door types; a fire rated emergency escape steel door and a **twelve point locking security** steel door, each insulated to BS EN 1634-1:2000:



Registered Office: Burgess Business Centre, North Road, Inverkeithing KY11 1NZ
 Tel: 01463 712000 www.cyclonesteelbuildings.co.uk VAT no: GB 915 0191 08
 Email: sales@cyclonesteelbuildings.co.uk

