

MSZ-EF R32

Zen Wall Mounted System

Inverter Heat Pump

Mseries

The **MSZ-EF** Zen range is a modern wall mounted air conditioning system that effortlessly blends streamlined design with energy efficiency, low noise, Wi-Fi control and air purification.

Available in capacities from 1.8kW to 5kW and connectable as a single or multi-split system, the Zen is the ideal solution for residential and small office applications.

R32

Key Features & Benefits:

- Stylish design with a choice of 3 sleek colours - black, silver and white
- Built in Wi-Fi interface enables system control & monitoring via the Mitsubishi Electric MELCloud app; plus voice control - compatible with Amazon Alexa or Google Assistant enabled devices
- In-room air purification through our advanced V-Blocking filter, neutralising bacteria, viruses, allergens, dust and mould
- Easy operation via a backlit controller with 7 day time clock
- Compatible with Plasma Quad Connect - an innovative, bolt-on air purifying device which neutralises viruses, bacteria, allergens, PM2.5, mould and dust






MSZ-EF B/S/W INDOOR UNITS		MSZ-EF18VGK B/S/W	MSZ-EF22VGK B/S/W	MSZ-EF25VGK B/S/W	MSZ-EF35VGK B/S/W	MSZ-EF50VGK B/S/W
CAPACITY (kW)	Heating (nominal)	2.0 (0.9 - 4.0)	2.6 (1.0-4.5)	3.2 (1.0-4.2)	4.0 (1.3-5.1)	5.8 (1.4-7.5)
	Cooling (nominal)	1.8 (0.9 - 3.0)	2.2 (1.0-3.2)	2.5 (0.9-3.4)	3.5 (1.1-4.0)	5.0 (1.4-5.4)
	Heating (UK)	-	-	2.65 (0.91-3.49)	3.32 (1.08-4.23)	4.82 (1.16-6.23)
	Cooling (UK)	-	-	2.48 (0.89-3.37)	3.47 (1.09-3.96)	4.96 (1.39-5.36)
SHF (nominal)	-	-	0.97	0.80	0.70	
COP / EER (nominal)	-	-	4.57 / 4.63	4.21 / 3.85	3.72 / 3.25	
SCOP / SEER (BS EN14825)	-	-	4.7 / 9.1	4.6 / 8.8	4.5 / 7.5	
ERP ENERGY EFFICIENCY CLASS	Heating/Cooling	-	-	A++ / A+++	A++ / A+++	A+ / A++
AIRFLOW (l/s)	Heating/Cooling - SLo-Lo-Mi-Hi-SHi	67-77-103-148-198 / 67-77-105-138-175	67-77-103-148-198 / 67-77-105-138-175	67-77-103-148-198 / 67-77-105-138-175	67-77-103-148-212 / 67-77-105-138-175	107-120-150-185-243 / 97-113-132-153-188
PIPE SIZE mm (in)	Gas	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
	Liquid	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling - SLo-Lo-Mi-Hi-SHi	21-24-29-37-45 / 19-23-29-36-42	21-24-29-37-45 / 19-23-29-36-42	21-24-29-37-45 / 19-23-29-36-42	21-24-30-38-46 / 21-24-30-36-42	30-33-37-43-49 / 30-33-36-40-43
SOUND POWER LEVEL (dBA)	-	60	60	60	60	60
DIMENSIONS (mm)	Width x Depth x Height	885 x 195 x 299	885 x 195 x 299	885 x 195 x 299	885 x 195 x 299	885 x 195 x 299
WEIGHT (kg)	-	11.5	11.5	11.5	11.5	11.5
ELECTRICAL SUPPLY	-	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)	-	6	6	6	6	6
INTERCONNECTING CABLE No. CORES	-	4	4	4	4	4

MUZ-EF OUTDOOR UNITS		MXZ Multi-Split Connection Only	MXZ Multi-Split Connection Only	MUZ-EF25VG	MUZ-EF35VG	MUZ-EF50VG
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	-	-	48 / 47	50 / 49	52 / 52
SOUND POWER LEVEL (dBA)	Cooling	-	-	58	62	65
WEIGHT (kg)	-	-	-	31	34	40
DIMENSIONS (mm)	Width x Depth x Height	-	-	800 x 285 x 550	800 x 285 x 550	800 x 285 x 714
ELECTRICAL SUPPLY	-	-	-	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE	-	-	-	Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	-	-	0.70 / 0.54	0.95 / 0.91	1.56 / 1.54
	Heating/Cooling (UK)	-	-	0.64 / 0.44	0.87 / 0.73	1.42 / 1.24
STARTING CURRENT (A)	-	-	-	3.6	4.4	7.1
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	-	-	3.6 / 3.0 [6.8]	4.4 / 4.2 [6.8]	7.1 / 6.9 [13.6]
FUSE RATING (BS88) - HRC (A)	-	-	-	10	10	16
MAINS CABLE No. CORES	-	-	-	3	3	3
MAX PIPE LENGTH (m)	-	-	-	20	20	30
MAX HEIGHT DIFFERENCE (m)	-	-	-	12	12	15
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675) - 7m	-	-	-	0.62 / 0.42	0.74 / 0.50	1.05 / 0.71
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675)	-	-	-	0.26 / 0.18	0.26 / 0.18	0.46 / 0.31

Note: MSZ-EF18VGK only available with R32 MXZ multi-split outdoor units. B = Black S = Silver W = White.

MSZ-EF18/25/35/50VGK B/S/W DIMENSIONS

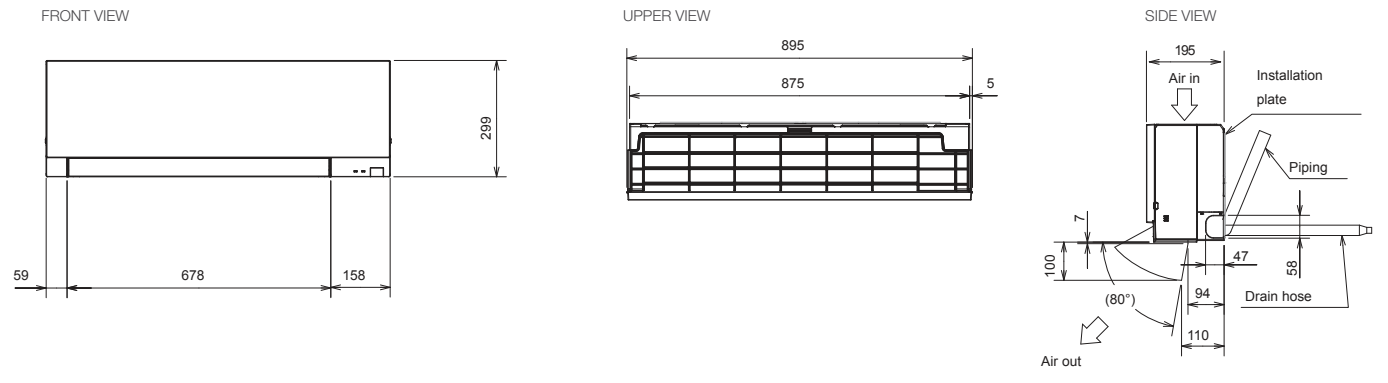

Telephone: 01707 282880
email: air.conditioning@meuk.mee.com
les.mitsubishielectric.co.uk



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Italy - Turkey - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2023. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: Refer to 'Installation Manual' and 'Instruction Book' for further 'Technical Information'. The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of April 2023

