


IF TRICKLE VENT REQUIRED, IT IS FITTED THROUGH THE FRAME HEAD WITH EXTERNAL HEAD DRIP AND FLAT TITON GRILLE.

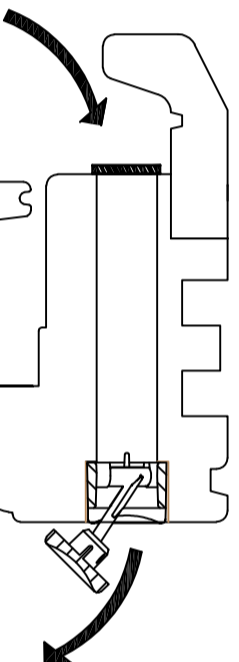


SPECIFICATION FOR 92MM TIMBER SINGLE DOOR

- OVULO PROFILE TO FRAME.
- DOOR COLOUR - INT & EXT FRAME COLOUR - WHITE, EXT DOOR COLOUR - ANTHRACITE GREY, INT DOOR COLOUR - WHITE
- 92X68MM FRAME JAMBS & HEAD AND 101X68MM CILL. INTERNALLY GLAZED PUTTY STYLE SASH WITH 58X50 STILES AND HEAD AND BOTTOM RAIL

VIEWED EXTERNALLY

THESE DRAWINGS ARE THE PROPERTY OF ANGLIAN HOME IMPROVEMENTS AND MUST NOT BE USED, DISTRIBUTED, LOANED OR COPIED WITHOUT THE EXPRESS PERMISSION OF ANGLIAN HOME IMPROVEMENTS.



CONTRACT No.: 30308665

date: 13/04/2021

PROPOSED: WINDOW REPLACEMENT

AT: (INSTALLATION ADDRESS)
3 ALMSHOUSES
THE STREET, STOWLANGTOFT
BURY ST. EDMUNDS
SUFFOLK, IP31 3JN

Revision	Date	Amendments	Drawers initials
A	22/06/21	Sections amended	SF

ITEM 7

