


**VIEWED EXTERNALLY**

IF TRICKLE VENT REQUIRED, IT IS FITTED THROUGH THE FRAME HEAD WITH EXTERNAL HEAD DRIP AND FLAT TITON GRILLE.

- OVOLO PROFILE TO FRAME.
- WINDOW COLOUR - WHITE.
- 92X68MM FRAME JAMBS & HEAD AND 92X38MM CILL.
- INTERNALLY GLAZED PUTTY STYLE SASH WITH 58X50 STILES AND HEAD AND BOTTOM RAIL WITH SPECIAL 21X50 GLAZING BAR.
- GLAZING - 28MM DOUBLE GLAZING IS SHOWN.
- SIDE HUNG OPENING SASH IS HUNG ON TROJAN FRICTION HINGES AND FITTED WITH ESPAGNOLETTE MULTI-POINT LOCK AND LOCKING HANDLE.

**SPECIFICATION FOR 92MM TIMBER FLUSH CASEMENT**

THESE DRAWINGS ARE THE PROPERTY OF ANGLIAN HOME IMPROVEMENTS AND MUST NOT BE USED, DISTRIBUTED, LOANED OR COPIED WITHOUT THE EXPRESS PERMISSION OF ANGLIAN HOME IMPROVEMENTS.

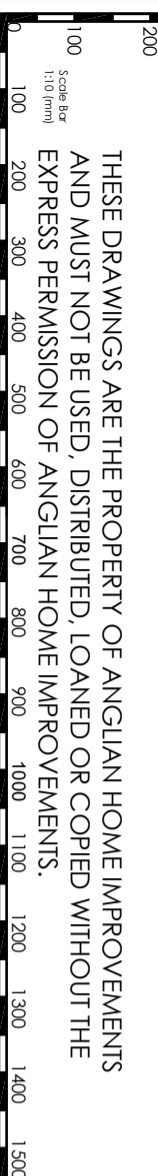

Revision	Date	Amendments	Drawers initials
A	22/06/21	Sections amended	SF

**ITEM 2**

**CONTRACT No.:** 30308665      **date:** 13/04/2021

**PROPOSED: WINDOW REPLACEMENT**  
**AT:** (INSTALLATION ADDRESS)  
 3 ALMSHOUSES  
 THE STREET, STOWLANGTOFT  
 BURY ST. EDMUNDS  
 SUFFOLK, IP31 3JN

