




REHAU HERITAGE

Period Style



The REHAU Heritage window system is designed to incorporate all the desirable traditional features of a timber sash window, yet with all the additional benefits and conveniences of modern PVC-U. The system includes all the classic detailing found in period sash windows, including a deep bottom rail, slim sashes for improved sightlines and an optional georgian bar.

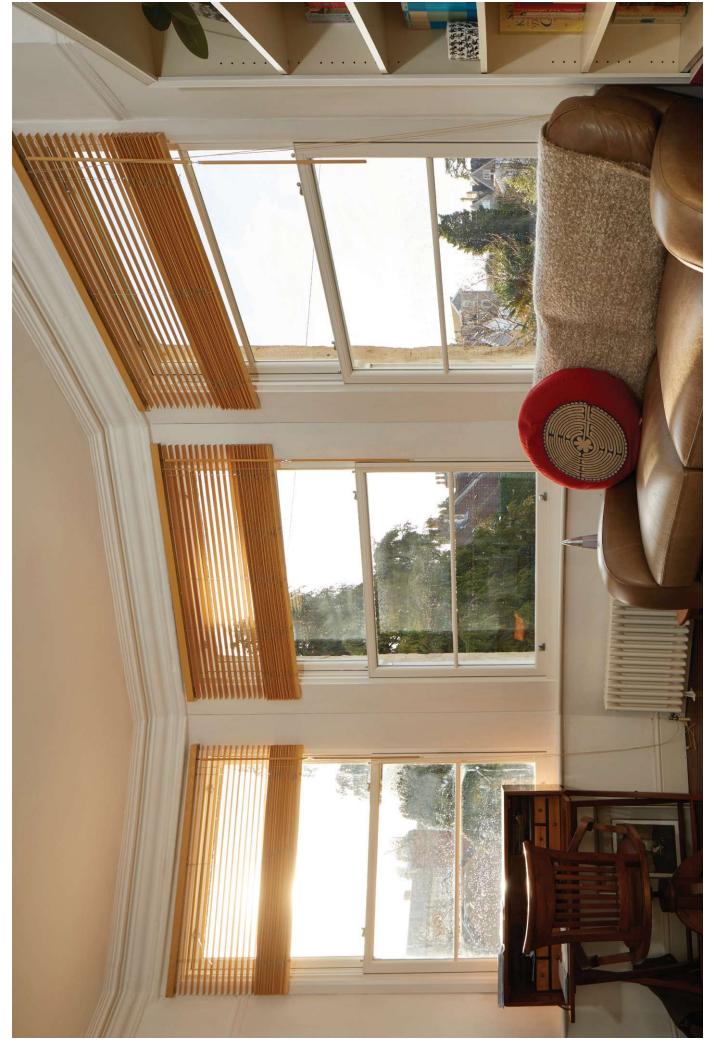

The system has two sashes built into the frame which slide in opposing directions and will remain fixed in any position.

A sub-frame, which makes up three sides of the window, is the most popular configuration and is welded at the top two corners whilst mechanically joined at the bottom with a sill and screws. The sill is sealed off at each end with an end cap to prevent water ingress into the walls of the property.

Noise reduction
Double glazed sealed units considerably reduce outdoor noise levels, allowing you to relax in the peace and quiet of your home.

Energy Efficiency
The REHAU Heritage window is capable of meeting current building regulations and can be specified in most applications. The Heritage window can achieve an A Rating with a U-value of 1.4W/(m²K) using a common double glazed unit for use with higher energy ratings.

Heritage windows include the traditional detailing found in period timber box sash windows. With this in mind we have included a deep bottom rail, georgian bars, run through sash horns and foil laminate options to mimic the look of painted wood.

Choose your style

Successfully approved and installed in conservation areas across the UK and Republic of Ireland, Heritage vertical sliding windows are suitable for any style of home.

Further options allow for classic-style hardware and fittings with optional decorative horns and georgian bars to replicate a traditional timber aesthetics to complete the stunning finish.

A slim sash is designed specifically to replicate the more elegant sightlines of traditional wooden windows.



The Collections

Safety and security

The superb period look is backed by a very modern approach to security. Our three-chamber sash profiles allow for even stronger reinforcements.

Low maintenance

Our systems contain a unique compound with a smooth gloss finish guaranteeing they retain their pristine appearance. It also means they will never warp, rot or need painting.



Choose your finish

If you like the look of traditional painted windows but want the benefits of PVC-U and double or triple glazing then you'll love REHAU's fantastic range of foil laminate range.

With our laminate PVC-U the colour and finish options are vast complementing both the exterior and interior of your home - you can choose one colour and finish for the outside and a totally different one for the inside. Over 20* laminate options include an attractive range of woodgrain effect finishes all contained in our easy to use swatch and split in to four simple collections to help you choose the look which matches your home.

All laminate finishes carry extensive guarantees and are well proven for high performance and longevity in all types of weather conditions and all areas, without colour deterioration or fade.



Statement Collection

Some of the bolder colours within the REHAU range, colours include reds, blues and greens for a more daring look.

Traditional Collection

Offering options for those looking a more traditional timber finish including Golden Oak, Mahogany and Rosewood.

Contemporary Collection

A great choice for period properties, The Timeless Collection includes Clothed Cream, Chartwell Green and Windsor.

Timeless Collection

Some of the bolder colours within the REHAU range, colours include reds, blues and greens for a more daring look.

*Some colour options may have extended lead times

The REHAU Heritage system has been designed to accommodate all possible hardware requirements.



Steel-reinforced sliding latches allow the sashes to be tilted inwards to enable the window to be cleaned from the inside of the property, yet the facility is concealed for aesthetic and safety reasons.

The latches can be locked off to prevent unauthorised tilting of the sash.

Standard balances of 14mm or 19mm diameter may be used, and it is also possible to fix all hardware into a specially designed steel or aluminium section for increased security performance.



Summary of options available with the REHAU Heritage system:

- Stepped frame with either mechanically jointed sill or fully welded options
- Supplementary profiles and seals, including Chamfered and Sculptured Georgian bars
- Triple brush seals in the frame create an excellent barrier against water and air.
- A range of heritage horn styles including run through sash horns.
- Standard glazing unit sizes of 24mm and 28mm