


# Notes

**General:**

- Any discrepancies to be reported to Client immediately, prior to commencement of any construction.

**Key:**

- RWP - Rainwater pipe and trapped gully
- SP - Soil pipe
- SVP - Soil vent pipe
- AAV - Accessible air admittance valve
- RE - Rodding eye
- IC - Inspection chamber
- DPC - Damp proof course
- FS - Fire stop
- TV - Trickle vent (background hit & miss ducted)
- SHS - SHS steel post to SE spec.
- Angle - Steel angle to SE spec.
- SV - Slate vent (extract, SVP, etc as indicated)
- AB - 215x140mm air brick (2900mm<sup>2</sup> per brick)
- MJ - Movement joint to S.E specification



**STATUTORY APPLICATIONS**

rev.	date	details	drwn	chkd

**IMAC Architecture**

A: 5 Hawthorn Place Blairgowrie PH10 6UP

W: [www.imacarchitecture.co.uk](http://www.imacarchitecture.co.uk)

E: [ian@imacarchitecture.co.uk](mailto:ian@imacarchitecture.co.uk)

T: 01250 873298 M: 07980 720 766

**Job Title**

CONVERSION OF GARAGE  
at 21 RIVERSIDE PARK, BLAIRGOWRIE,  
PERTSHIRE  
for MR. & MRS. GOWRIE

**Drawing Title**

PROPOSED ELEVATION



Scale. 1:25 Drwn. ImcG

Original Size. A3 Chkd. ImcG


Appr. Date. JUNE 2021

**Drawing No.**


**261/GA/501**

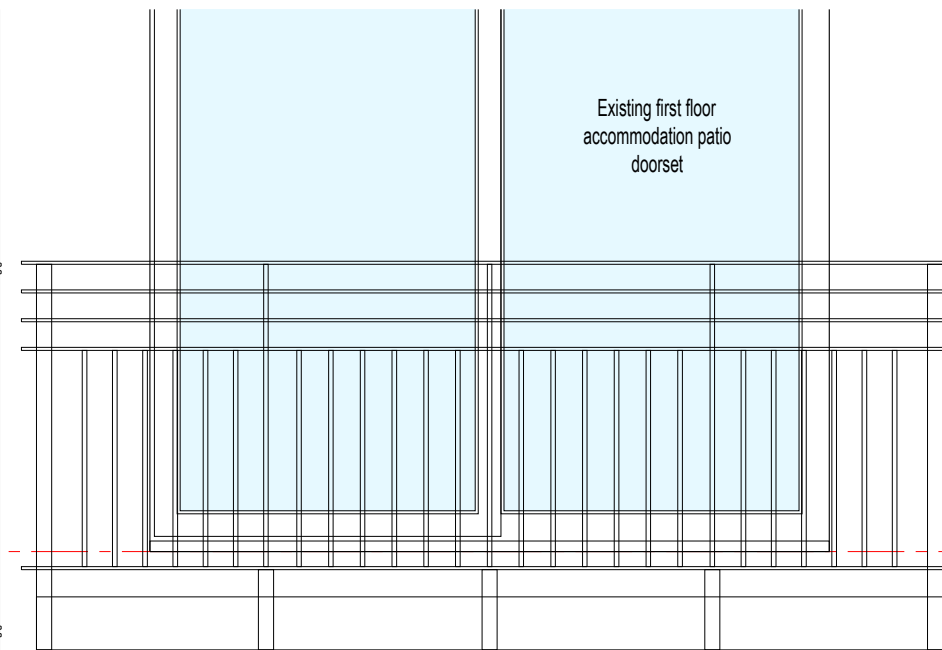

1st FL - 102.658

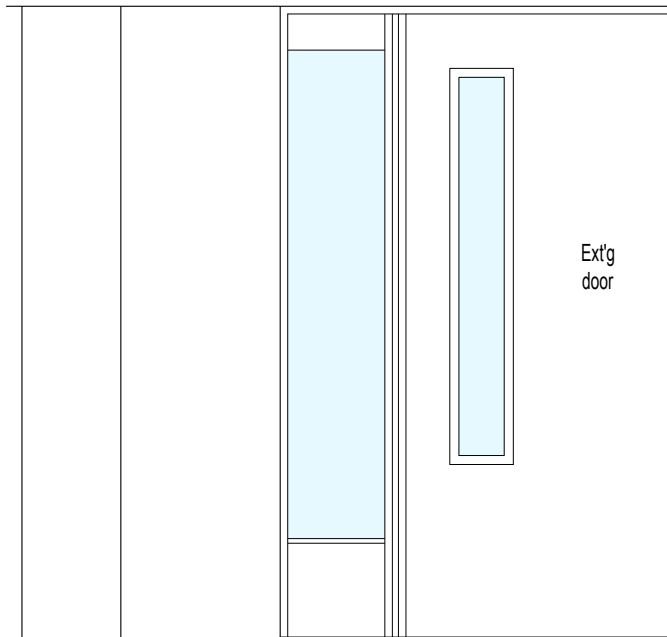

Ext'g door

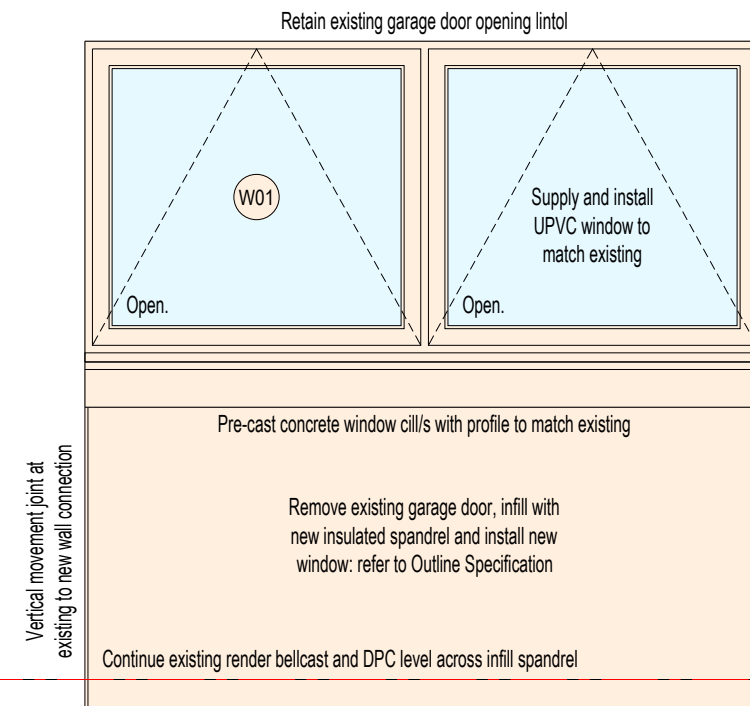

Retain existing garage door opening lintol

W01

Supply and install UPVC window to match existing

Pre-cast concrete window cill/s with profile to match existing

Remove existing garage door, infill with new insulated spandrel and install new window: refer to Outline Specification

Continue existing render bellcast and DPC level across infill spandrel

Vertical movement joint at existing to new wall connection

Vertical movement joint at existing to new wall connection

Boundary wall

GFL - 100.000

**WINDOW SCHEDULE:**

Window:	Type:	Trickle Ventilation:	Size (Approx. & TBC On-site):	Notes:
W01	Open & fixed	2no. 6000mm <sup>2</sup>	Existing x1000mm	Refer to Outline Specification

Note: all window and fixed glazing sizes are indicative and for the purposes of Building Warrant only. All window sizes to be verified on site by Main Contractor prior to commencement of any order. Any discrepancies to be reported to Architect prior to commencement of works.

**EAST ELEVATION**

1:25 @ A3