

– Extension of adjacent house Remove existing window and part of the external wall below (as - Existing steps to previously shown be removed in approved Certificate of Lawfulness ref n 1180/CLU/21 Front (South-East) elevation as existing 1:50 @ A1 Remove section of the existing roof finish, gutter, fascia and soffit board from this area Remove existing door and steps Side (North-East) elevation as existing 1:50 @ A1 Extension of adjacent house — Existing steps to be removed Rear (North-West) elevation as existing 1:50 @ A1

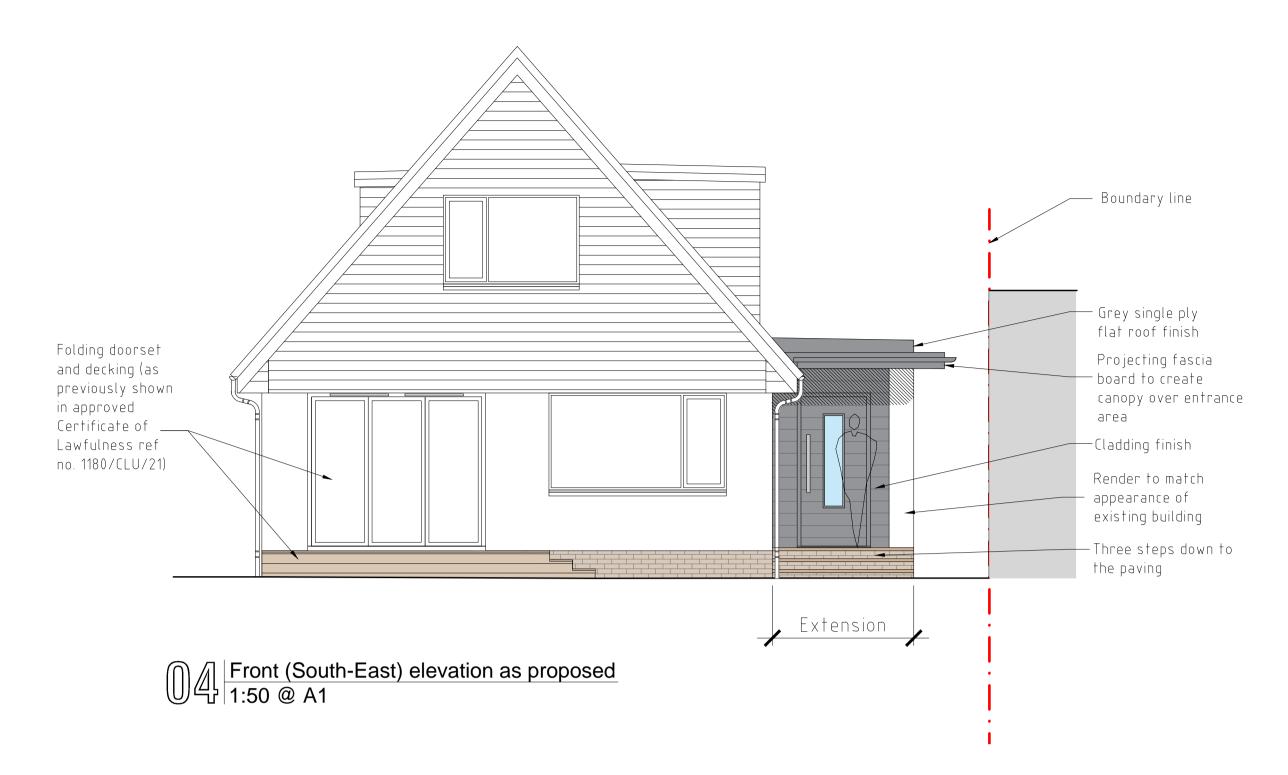

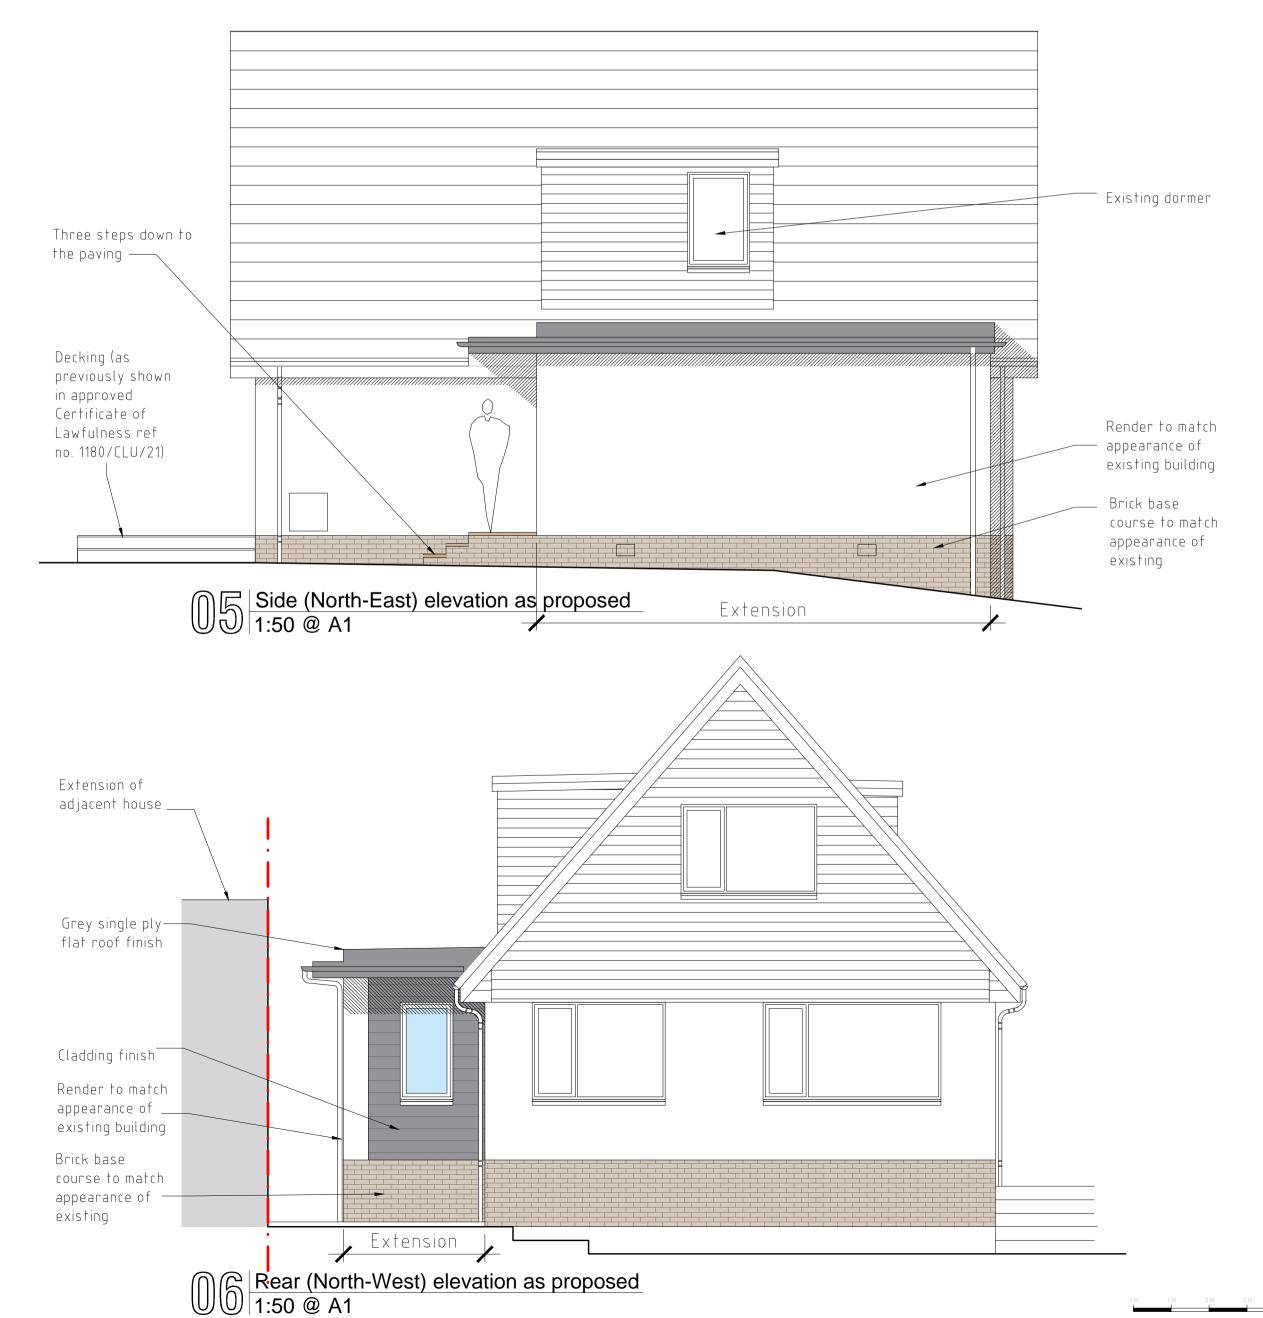

Do not scale this drawing. Use figured dimensions only. All dimensions given are in millimetres unless otherwise stated. All levels are in metres. All dimensions, levels shown on this drawing are to be verified by the contractor prior to the commencement of work. This drawing is to be read in conjunction with all relevant architectural, structural, services drawings and specifications. The copyright of this drawing and all relevant information appearing on this drawing is reserved by EKJN Architects. Use or disclosure to any third party either wholly or in part is prohibited unless expressly authorised by EKJN Architects. Variations and modifications to work shown on this drawing shall not be carried out without prior permission of EKJN Architects, who accept no liability for alterations made to this drawing by any other party.

For best results when viewing this drawing in PDF format the 'Smooth line art' option in the PDF reader should be unticked (Edit>Preferences>Page display).

Where existing construction is shown on this drawing the details of the existing construction are indicative unless

stated otherwise WORKMANSHIP

Existing Construction

Insulation generally:

Fill all voids as specified. Leave no gaps. Do not compress insulation Leave no cold spots.

Vapour Barriers generally:

Vapour barriers are to be un-damaged. Repair any holes or tears with proprietary foil tape. Seal all service penetrations, cables, pipes etc. Seal all junctions between adjacent vapour barriers to make an airtight installation.

Comply with Lead Development Association guidelines for all leadwork. include all necessary lead wedges, clips and non-ferrous fixings. Ensure the completed installation is robust and weathertight.

Damp-proof membranes/courses:

Ensure all damp-proof membranes are un-damaged. Repair any holes or tears. Seal all joints between sheets with proprietary tape. Seal all pipe penetrations, sleeved with dpm material for full depth of floor slab. Turn dpm up at slab edges and seal to dpc. Damp proof courses are to be continuous, lapped and sealed. Ensure a robust, damp proof construction at all junctions. Use proprietary pre-formed corners and angles wherever possible.

British Standards: All construction work is co comply generally with BS8000: Workmanship on Building Sites.
BS8000:Part 1: Excavation and Filling BS8000 part 2: Concrete BS8000 part 3: Masonry BS8000 part 4: Waterproofing BS8000 part 5: Joinery BS8000 part 6: Slating and tiling BS8000 part 7: Glazing BS8000 part 8: Plasterboard

BS8000 part 9: Screeds BS8000 part 10: Plastering and rendering BS8000 part 11: Tiling BS8000 part 12: Decorator work (also BS 6150) BS8000 part 13: Sanitaryware and drains

BS8000 part 14: Underground drains BS8000 part 15: Plumbing (also BS 6700) BS8000 part 16: Sealants

Accuracy of construction is to comply with BS5606:1990 Electrical installations are to comply with BS7671:2008

PLANNING Drawing Category

53 Riccarton Road Linlithgow, EH49 6XH

Elevations

as existing and as proposed



EKJN Architects Bryerton House 129 High Street Linlithgow EH49 7EJ Web www.ekjn.co.uk Tel 01506 847151 Fax 01506 846209 E mail@ekjn.co.uk

December 2023 Drawing no 31 Job no 21-028