
## Bio-Pure 3 E Range Technical Sheet



## Independently Tested & Certificated to BS EN12566-3

No of Persons	5 to 13
Maximum average daily flow	2400 litres
Maximum BOD/day	780 g
In ground depth	2.44 m
Outside diameter	2.10 m
Inlet Invert	0.7 m
Outlet Invert	0.8 m
Weight empty	200 kg
Total capacity	3000 litres
Power consumption	65 watts
Discharge level	
Biological oxygen demand (BOD)	20 mg/l
Suspended solids	30 mg/l

Ammonia (NH3)

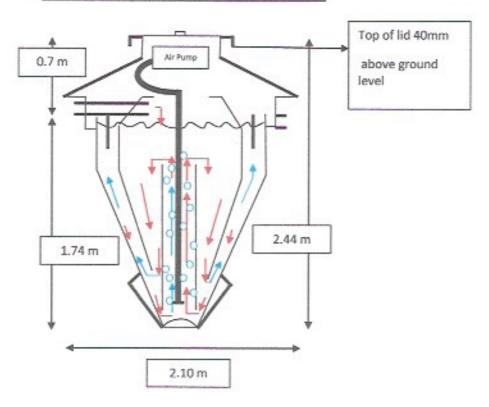

20 mg/l