



Tree protection fencing
 Tree protection fencing to be erected prior to construction works, along with materials hardstanding area, and removed immediately prior to soft landscaping works, after completion of construction.

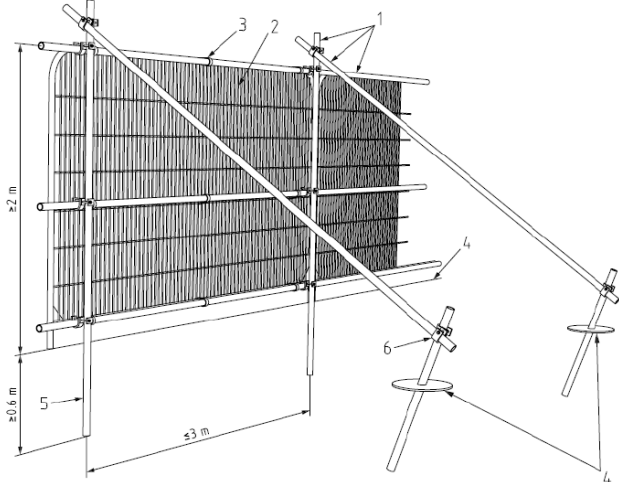


- Key**
- 1 Standard scaffold poles
 - 2 Heavy gauge 2 m tall galvanized tube and welded mesh infill panels
 - 3 Panels secured to uprights and cross-members with wire ties
 - 4 Ground level
 - 5 Uprights driven into the ground until secure (minimum depth 0.6 m)
 - 6 Standard scaffold clamps

High visibility all weather notices will be securely attached to the barrier around each protection zone with wording as shown below.

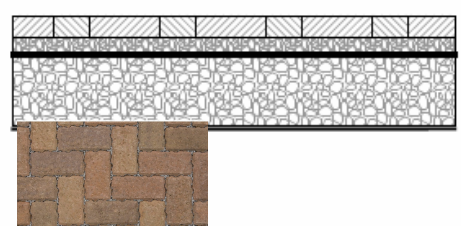

Permeable Block Paving Construction

- 60mm thick permeable rectangular concrete blocks, such as Marshall's Piora, laid in accordance with manufacturer's recommendations.
- 50mm of 2-6mm angular stone.
- Verdatex NW9 non woven geotextile.
- 200mm of 5mm - 20mm clean, angular stone.
- Verdatex SG 36/40 woven polypropylene geotextile.



north

**TREE PROTECTION AREA
KEEP OUT!**

TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS.

- THE FOLLOWING MUST BE OBSERVED BY ALL PERSONS:
- PROTECTIVE FENCING MUST NOT BE MOVED
 - NO PERSON SHALL ENTER THE PROTECTED AREA
 - NO MACHINE OR PLANT SHALL ENTER THE PROTECTED AREA
 - NO MATERIALS SHALL BE STORED IN THE PROTECTED AREA
 - NO SPOIL SHALL BE DEPOSITED IN THE PROTECTED AREA
 - NO EXCAVATION SHALL OCCUR IN THE PROTECTED AREA

CLIENT;	Wellingtonia Estates		
PROJECT;	The Breech Sandhurst GU47 0PN		
TITLE;	block layout proposed		
SCALE;	1-250	DATE;	05/21
		DWN;	GB
DRAWING NUMBER	18-18-B02		

