

SOUND CALCULATION FOR PERMITTED DEVELOPMENT


ASSESSMENT POSITION

THIS IS 1M EXTERNAL TO THE CENTRE POINT OF ANY DOOR OR WINDOW TO A HABITABLE ROOM OF A NEIGHBOURING PROPERTY

HABITABLE ROOM

ANY BEDROOM, LIVING ROOM, DINING ROOM ETC.

Directivity

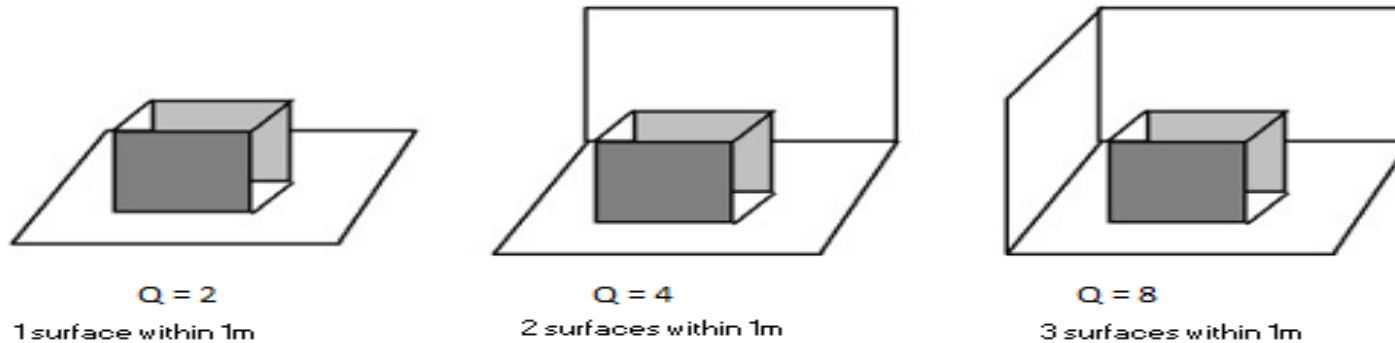

HPID6R32	Q2	Q4	Q8
MINIMUM DISTANCE WITH OR WITHOUT BARRIER & ASSESSMENT POSITION NOT VISIBLE	4M	5M	8M
MINIMUM DISTANCE WITH OR WITHOUT BARRIER & ASSESSMENT POSITION VISIBLE	6M	8M	12M
HPID10R32	Q2	Q4	Q8
MINIMUM DISTANCE WITH OR WITHOUT BARRIER & ASSESSMENT POSITION NOT VISIBLE	3M	4M	6M
MINIMUM DISTANCE WITH OR WITHOUT BARRIER & ASSESSMENT POSITION VISIBLE	6M	8M	10M
HPID13R32	Q2	Q4	Q8
MINIMUM DISTANCE WITH OR WITHOUT BARRIER & ASSESSMENT POSITION NOT VISIBLE	2M	3M	4M
MINIMUM DISTANCE WITH OR WITHOUT BARRIER & ASSESSMENT POSITION VISIBLE	4M	5M	8M
HPID17R32	Q2	Q4	Q8
MINIMUM DISTANCE WITH OR WITHOUT BARRIER & ASSESSMENT POSITION NOT VISIBLE	3M	4M	5M
MINIMUM DISTANCE WITH OR WITHOUT BARRIER & ASSESSMENT POSITION VISIBLE	4M	6M	8M